





reddot award 2018
winner












TECHNICAL DATA

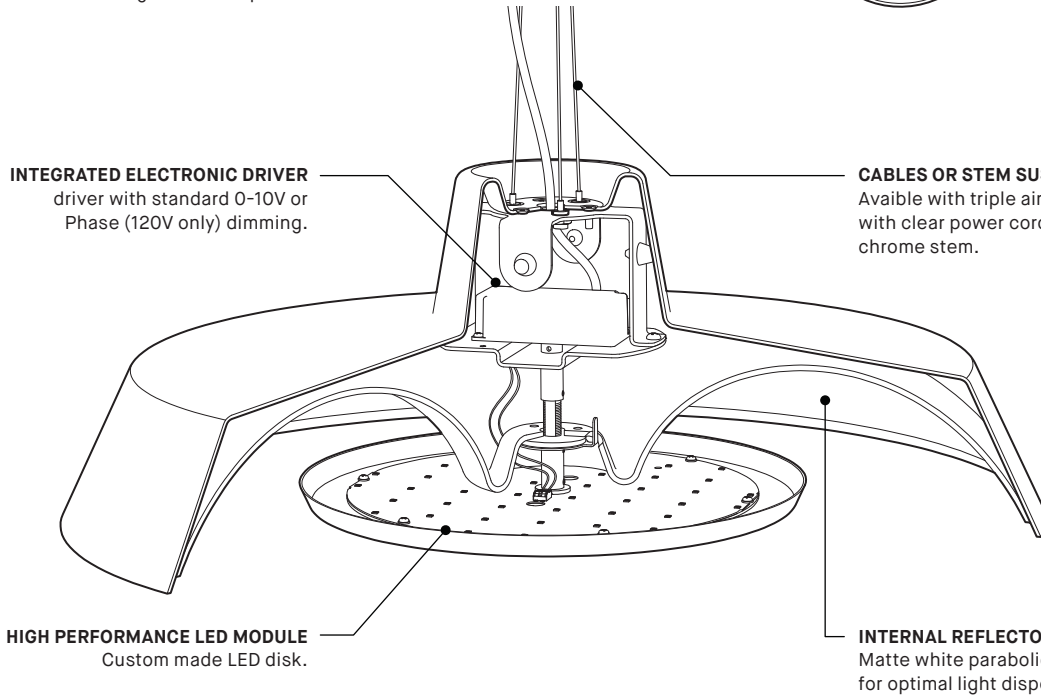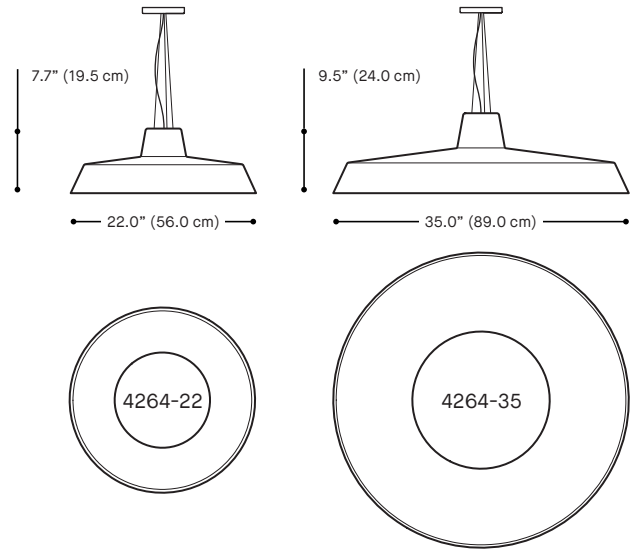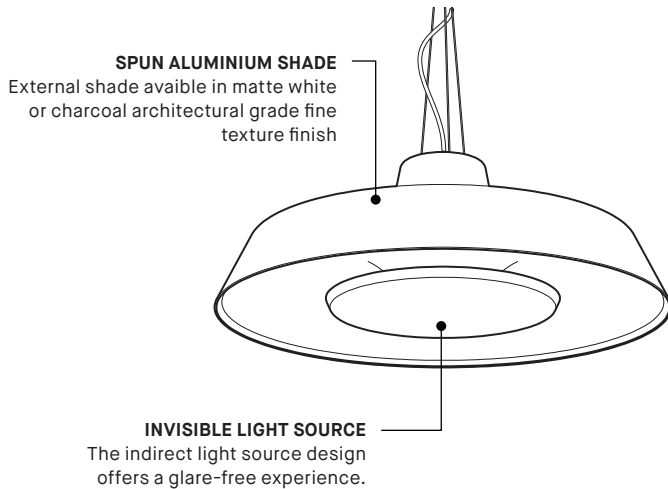

reddot award 2018 winner




PRODUCT SPECIFICATION **4264-22** **4264-35**

PERFORMANCE		
SYSTEM WATTAGE	25 W	55 W
DELIVERED LUMENS (4000K)	1130 LM	2555 LM
EFFICACY	45 LM/W	46 LM/W
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	ON REQUEST	ON REQUEST

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION

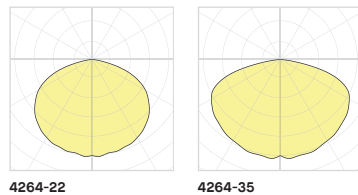

Visit our website for warranty terms and conditions.

FLYNN 4264

PROJECT PROJÉT
SPEC TYPE
NOTES



4264-22



4264-35



FINISH FINI



ANTE

WHE

MOUNTING OPTIONS OPTIONS DE MONTAGE

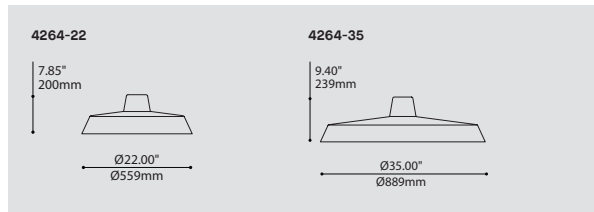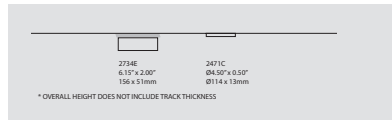

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4264-22	FLYNN 22"	
4264-35	FLYNN 35"	
LIGHT SOURCE SOURCE LUMINEUSE		
4264-22		
LED.20	20W, LED	
4264-35		
LED.43	43W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
STEM OR CABLE TIGE OU CÂBLE		
ST10*	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
* STEM FINISH SAME AS EXTERIOR FINISH		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CÂBLE		
36	36" STEM (STD LENGTH)	
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND FOR LED: 0.50" CANOPY (2471C)	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
EXTERIOR SHADE FINISH FINI ABAT-JOUR EXTÉRIEUR		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
INTERIOR SHADE FINISH FINI ABAT-JOUR INTÉRIEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** Under this large size shade with straight, imposing lines, hides a reflector with soft curves and a generous personality. A concealed LED light source underneath the fixture projects a soft and seductive indirect light.
- INSTALLATION:** Available on a stem or with an easy-to-install triple aircraft cable configuration.
- LIGHT SOURCE:** Custom LED light engine with integrated driver with standard phase or 0-10V dimming capability.
- STRUCTURE:** Custom design spun aluminum shade available in 22" or 35" diameter, with white or anthracite architectural grade fine texture finishes.
- REFLECTOR:** Thermoformed acrylic with matte white frosted finish for optimal light diffusion.
- CERTIFIED:** c-CSA-us





4264-22

CCT (K): 4000
 Delivered Lumens (lm): 834
 System wattage (W)*: 24.8
 Distribution: Direct
 Delivered Efficacy (lm/W): 33.63
 Photometric type: C

Luminous dimensions

Luminous shape: Rectangle
 Units: in (mm)
 0-180 Axis: 19.685 (500.0)
 90-270 Axis: 19.685 (500.0)
 Height: 3.937 (100.0)

4264-35

CCT (K): 4000
 Delivered Lumens (lm): 1925
 System wattage (W)*: 54.2
 Distribution: Direct
 Delivered Efficacy (lm/W): 35.51
 Photometric type: C

Luminous dimensions

Luminous shape: Rectangle
 Units: in (mm)
 0-180 Axis: 35.433 (900.0)
 90-270 Axis: 35.433 (900.0)
 Height: 3.937 (100.0)

