



A new take on a modern yet timeless shape with clean lines and simplicity.


Verner combines high light output with a geometric aesthetic to enhance interior spaces.



reddot award 2019
winner lighting design



4273-14

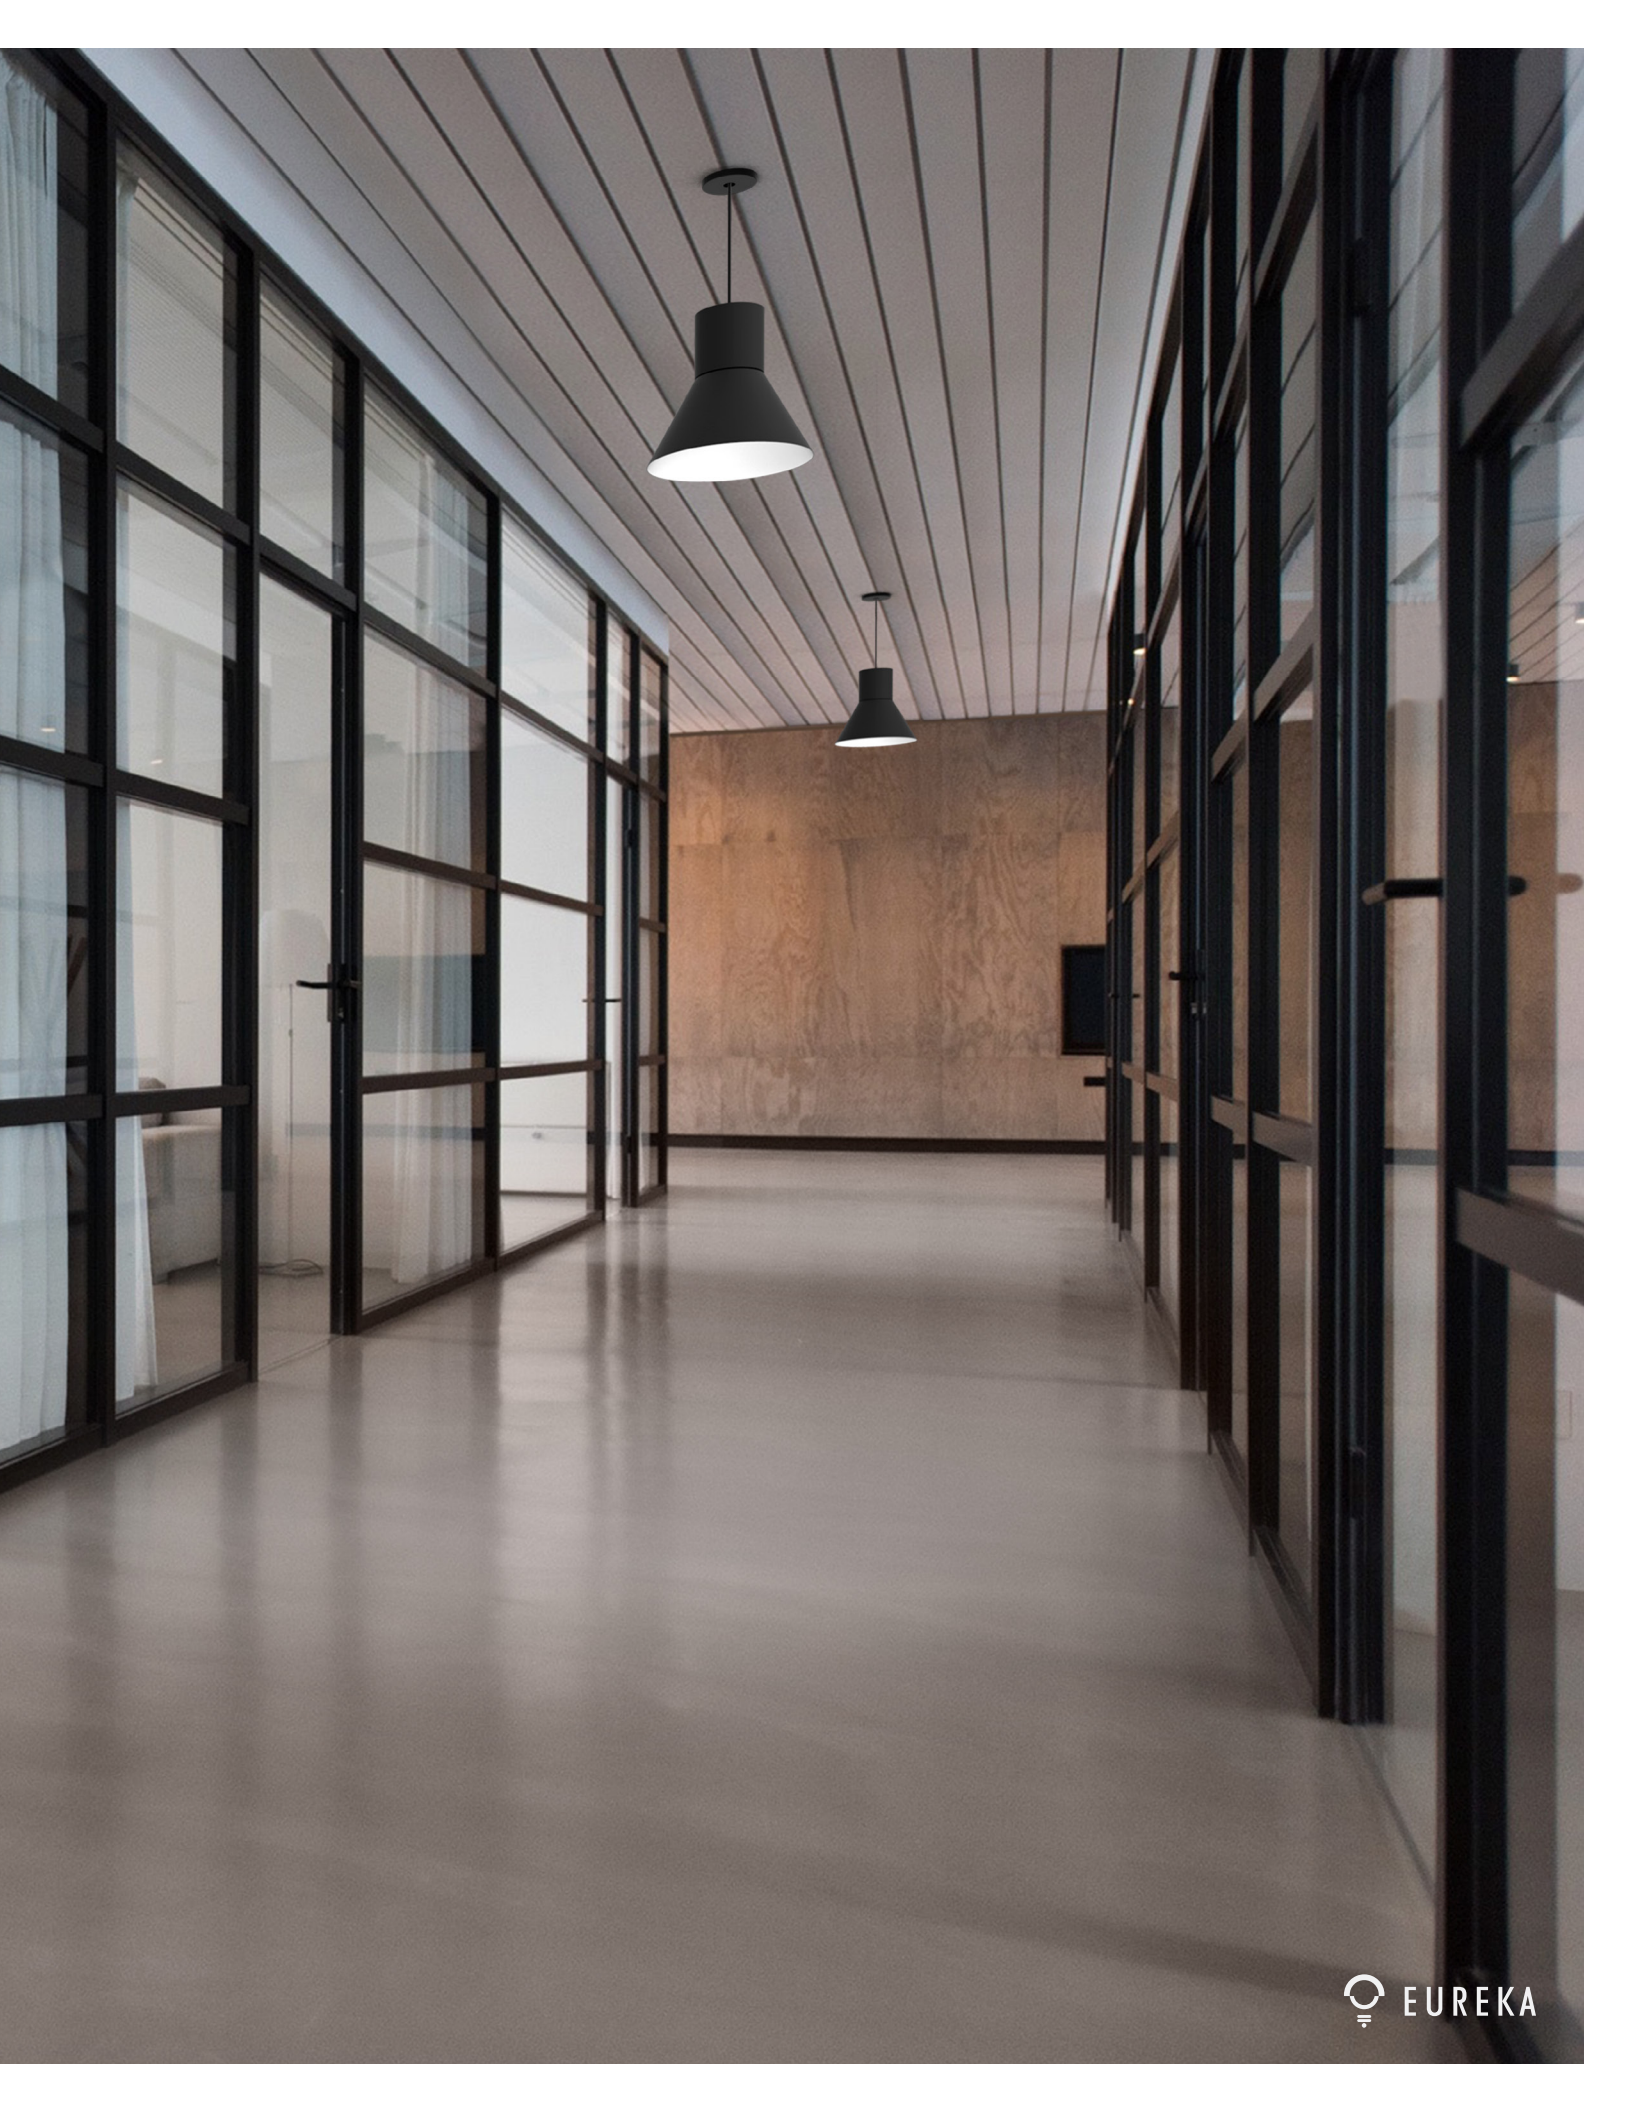





E1

Second Floor



E2


E4







TECHNICAL DATA

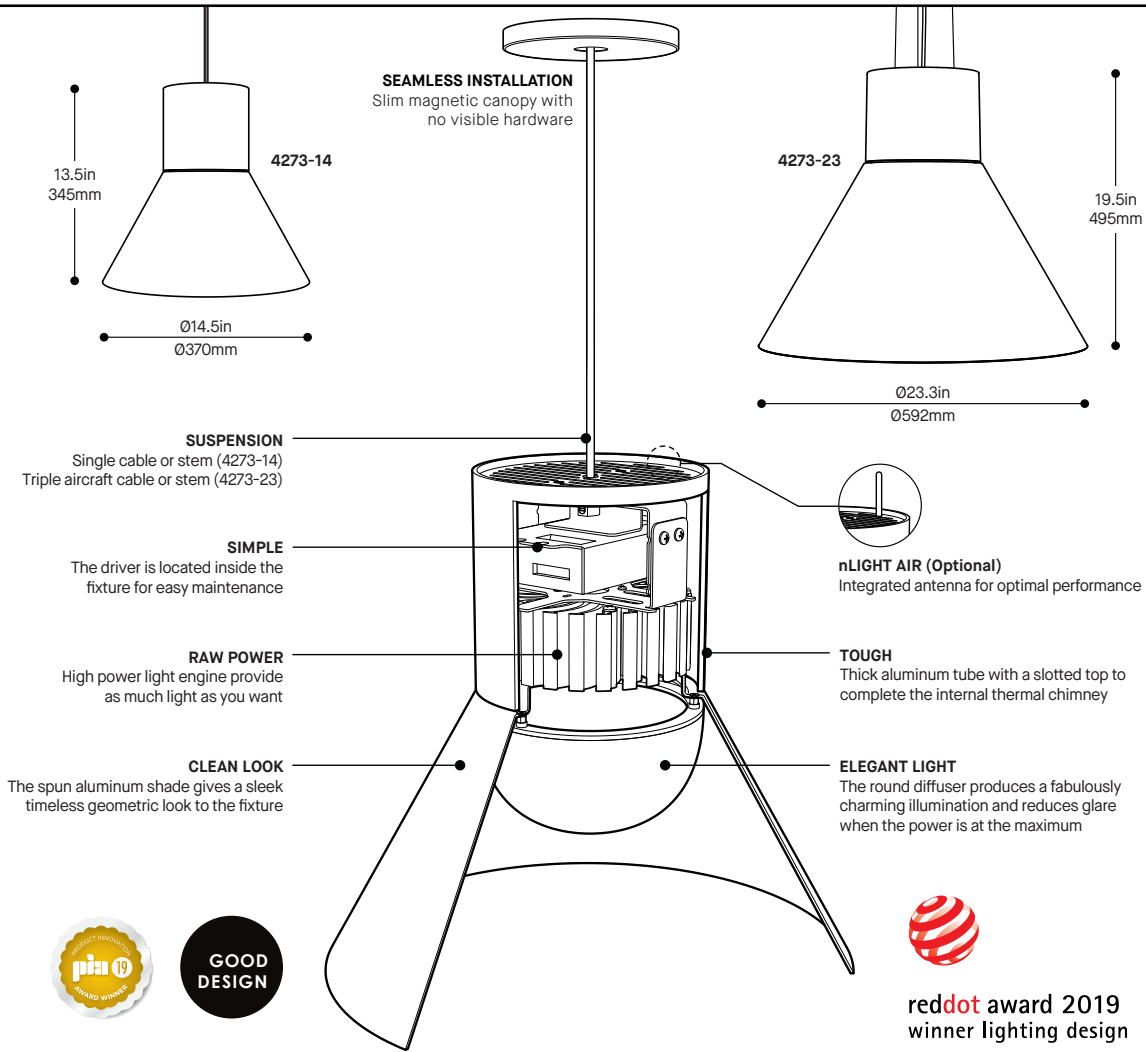


PRODUCT SPECIFICATION	4273-14 REG — HO	4273-23 REG — HO
PERFORMANCE		
SYSTEM WATTAGE	28.7W — 51.3W	34.8W — 68.9W
DELIVERED DIRECT LUMENS (4000K)	2420LM — 4210LM	3200LM — 5560LM
EFFICACY	84.3LM/W	92.0LM/W
OTHER INFORMATIONS		
WEIGHT	7.7LBS / 3.5KG	8.2LBS / 3.7KG
L70 (LUMEN MAINTENANCE)	> 63 600 HRS	> 55 000 HRS
WELL & LEED STANDARD REQUIREMENTS		
MAX. LUMINANCE 45°-90° OF NADIR	5680(REG) CD/M ²	2944(HO) CD/M ²
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)	
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

LIGHT DISTRIBUTION



4273-XX



Visit our website for warranty terms and conditions.



4273-14

 EUREKA



VERNER 4273

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE



WHE

FAMILY FAMILLE



4273-14



4272-9



4272DI-16




4273-23



4272D-9 DIRECT ONLY



4272D-16 DIRECT ONLY

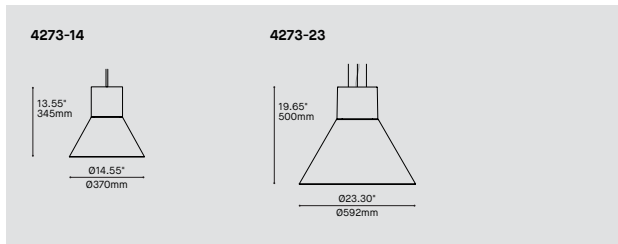

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4273-14	VERNER 14"	
4273-23	VERNER 23"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
347V*	347 VOLT	
	*347V COMES WITH A 09.3" X 1.75" CANOPY	
CONTROL OPTION OPTION DE CONTRÔLE*		
DV	0-10V DIMMING (120V-277V & 347V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2	NLIGHT AIR CONTROL GEN 2 ^{(A)*}	
NLIGHT	NLIGHT WIRED CONTROL ^{(B)*}	
	^(A) NLIGHT AIR INTEGRATED INSIDE PRODUCT	
	^(B) REQUIRES REMOTE POWER PACK (39NLWA)	
	*EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT	
	*REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
	AVAILABLE WITH LED SOURCES 120-277V. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS. WITH DV DIMMING OPTION, AN ADDITIONAL POWER CABLE WILL DROP FROM CEILING NEXT TO MAIN CABLE.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	*3981EA ACCESSORY IS REQUIRED; ONLY AVAILABLE WITH CABLE	
STEM OR CABLE TIGE OU CABLE		
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
C	CABLE, FIELD ADJUSTABLE (FOR 4273-14)	
AC	AIRCRAFT MOUNTING & CABLE, FIELD ADJUSTABLE (FOR 4273-23)	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE		
36	36" STEM (STD LENGTH)	
60	60" CABLE (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
POWER CORD OR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
SHADE FINISH FINI ABAT-JOUR ^(A)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
RAL ^(B)	PLEASE SPECIFY RAL CODE	
	^(A) SHADE INTERIOR IS ALWAYS WHITE	
	^(B) LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	
	*FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	

VERNER 4273-14

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES



FINISH FINI




BLKE



WHE

4273-14



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4273-14 VERNER

4273-14

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K

35 3500K

40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

80

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)

DP PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.

STEM OR CABLE TIGE OU CABLE

C CABLE, FIELD ADJUSTABLE

C

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

60 60" CABLE (STD LENGTH)

** CUSTOM CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

SHADE FINISH FINI ABAT-JOUR (A)(B)

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

(A) SHADE INTERIOR IS ALWAYS WHITE

(B) SHADE FINISH DICTATES THE CABLE COLOR

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

WH

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **EMB** **IES** **LED**

DESIGN:

Verner, at its core, is a powerful light engine fused to a timeless geometric aluminum shell. A diffusion dome hidden inside the shade makes for a pleasant surprise when you look up.

INSTALLATION:

Single power cable or stem for a minimalist look.

LIGHT SOURCE:

A highly powerful COB type light source project a light, softened by a polymer diffusion dome to create an illumination that is efficient, yet soft to the eye. Many control options available.

SHADE:


Precision spun aluminum shade, with a white internal finish for optimal light reflection.

CERTIFIED:

c-CSA-us



Project: Government of Canada
Co-Working space, Ontario, Canada
Photographer: Mark Hölleron

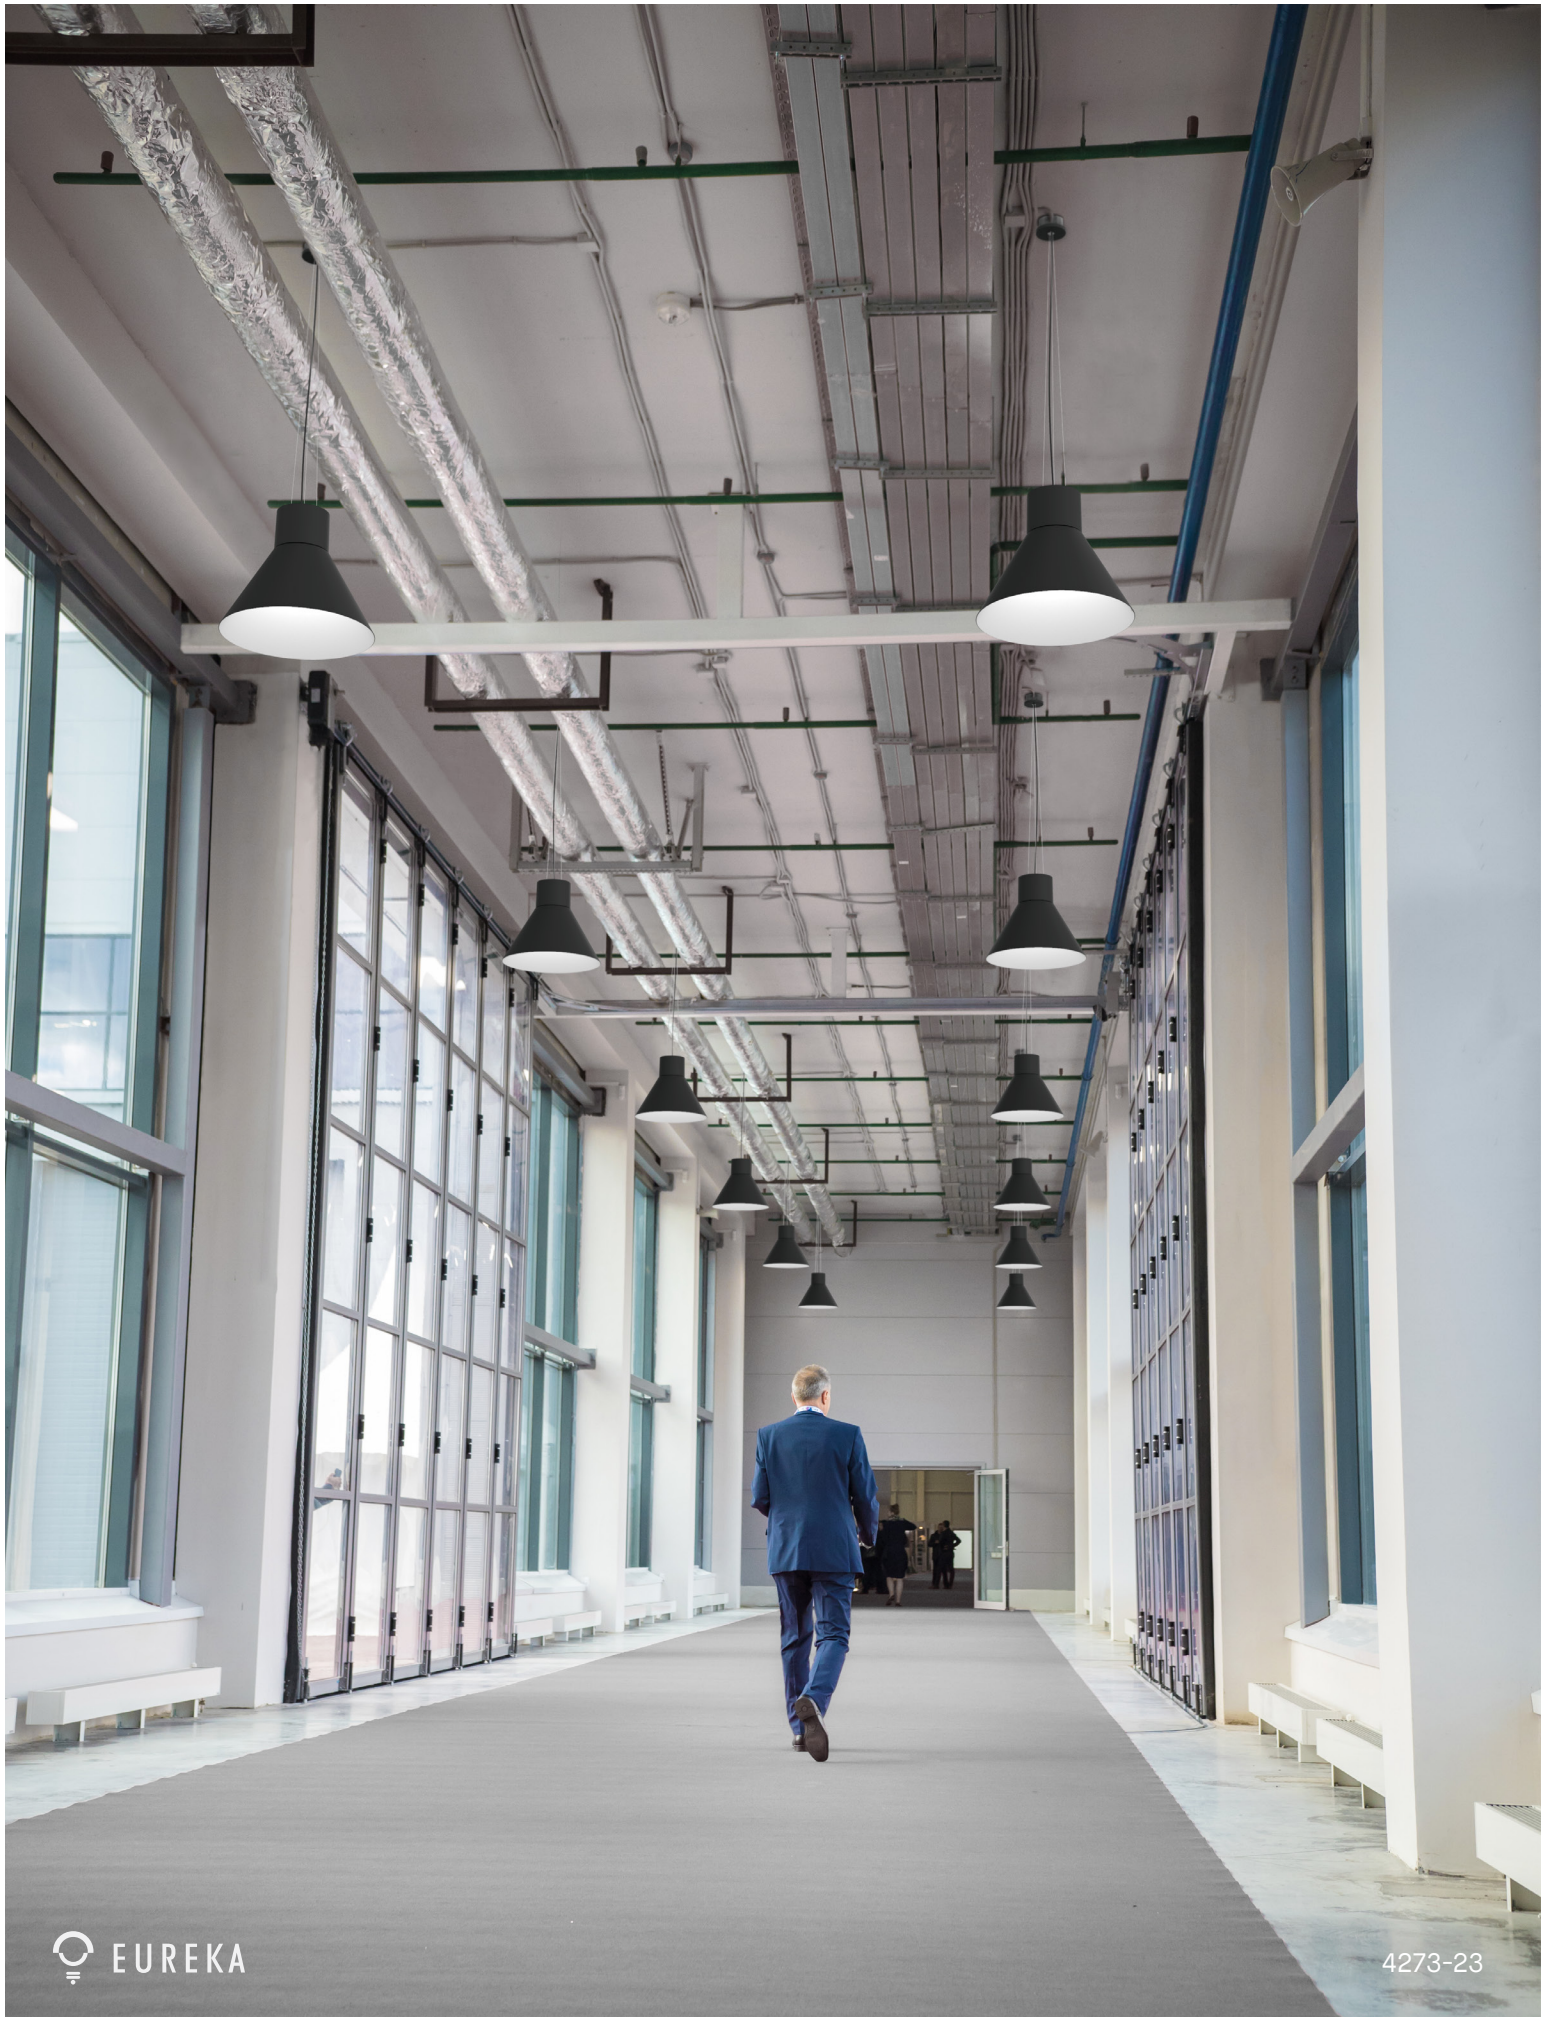



PHOTOMETRIC REPORT

VERNER 4273


4273-14 - LED REG

CCT (K): 4000
Delivered Lumens (lm): 2420
System wattage (W)*: 28.7
Distribution: Direct
Delivered Efficacy (lm/W): 84
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 15.75 (400)

Luminaire spacing criteria
2 luminaires, plane 0: 1.19
2 luminaires, plane 90: 1.19
4 luminaires: 1.23

*System wattage include driver and LED module consumption

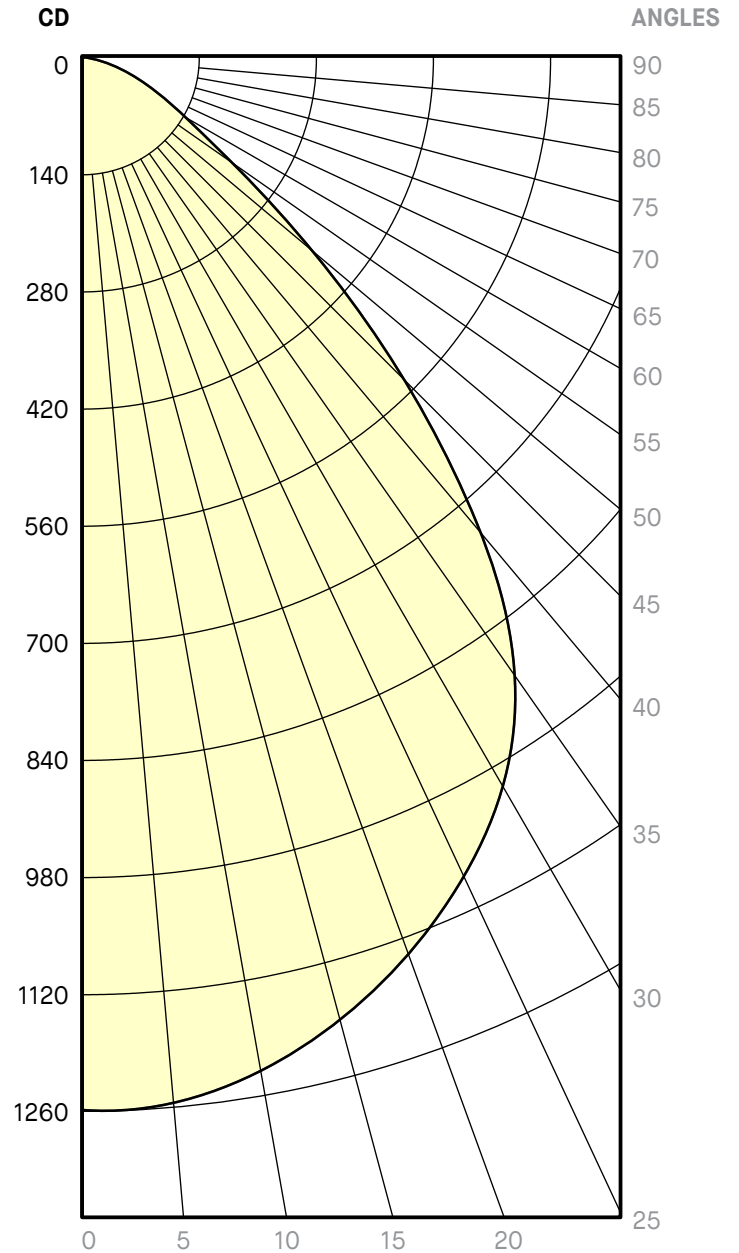

————— 0 - 180


4273-14 - LED HO

CCT (K): 4000
 Delivered Lumens (lm): 4210
 System wattage (W)*: 51.3
 Distribution: Direct
 Delivered Efficacy (lm/W): 82
 Photometric type: C

Luminous dimensions
 Luminous shape: Sphere
 Units: in (mm)
 0-360 Axis: 15.75 (400)

Luminaire spacing criteria
 2 luminaires, plane 0: 1.18
 2 luminaires, plane 90: 1.18
 4 luminaires: 1.22

*System wattage include driver and LED module consumption

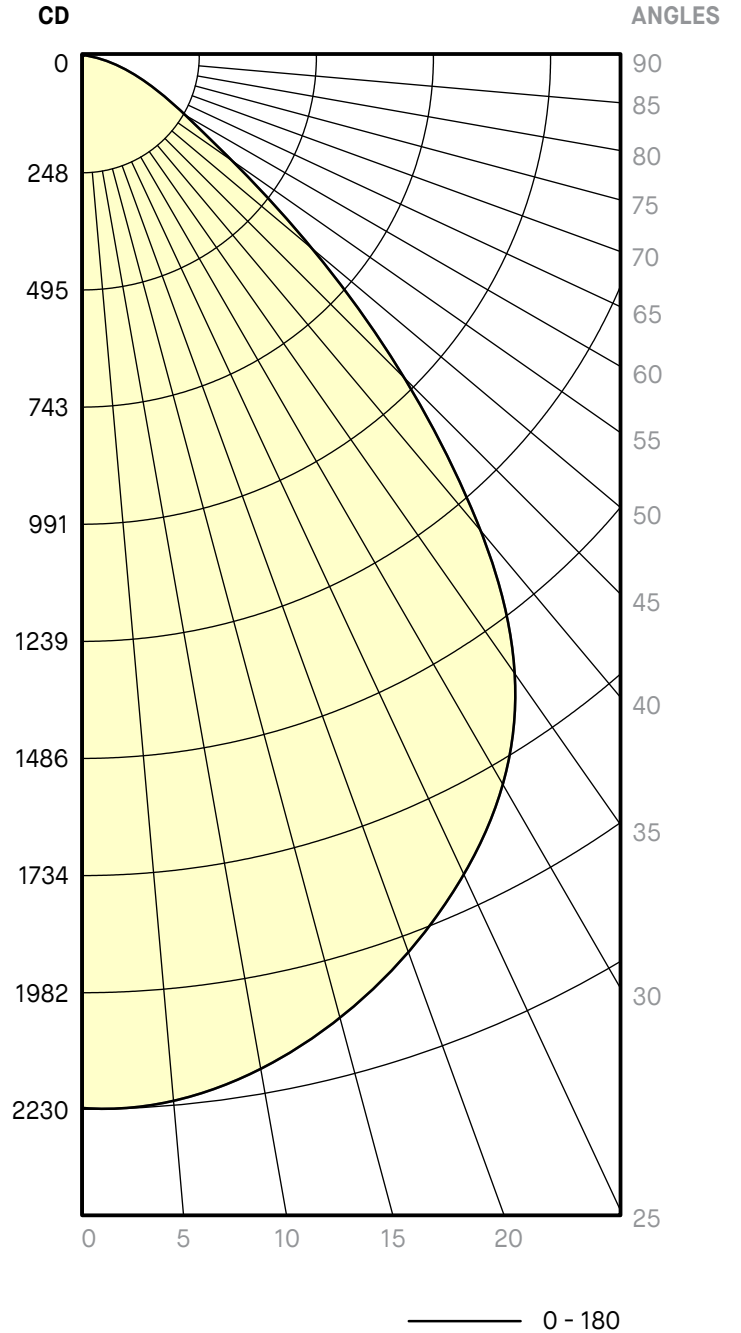

PHOTOMETRIC REPORT

VERNER 4273


4273-23 - LED REG

CCT (K): 4000
Delivered Lumens (lm): 3200
System wattage (W)*: 34.8
Distribution: Direct
Delivered Efficacy (lm/W): 92.0
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 23.62 (600)

Luminaire spacing criteria
2 luminaires, plane 0: 1.19
2 luminaires, plane 90: 1.19
4 luminaires: 1.23

*System wattage include driver and LED module consumption

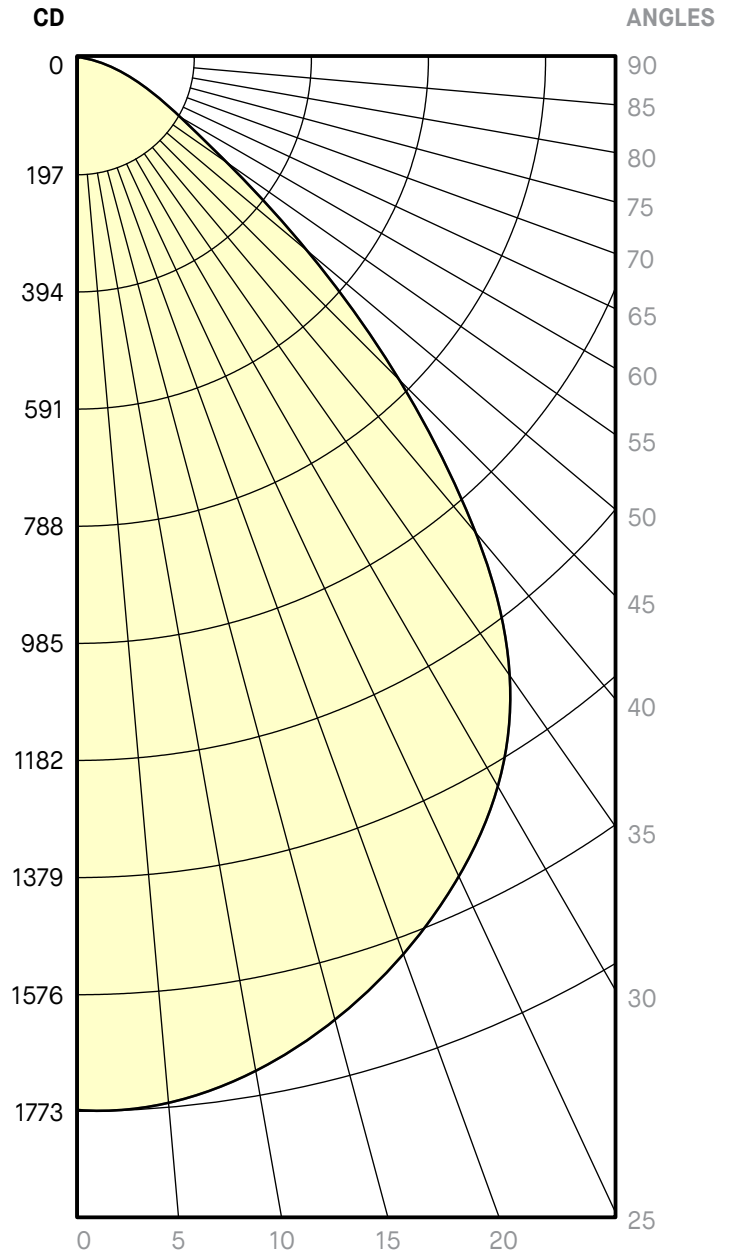

4273-23 - LED HO

CCT (K): 4000
Delivered Lumens (lm): 5560
System wattage (W)*: 68.9
Distribution: Direct
Delivered Efficacy (lm/W): 80.7
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 23.62 (600)

Luminaire spacing criteria
2 luminaires, plane 0: 1.19
2 luminaires, plane 90: 1.19
4 luminaires: 1.21

*System wattage include driver and LED module consumption

