

Direct

74510D-48-REG

CCT (K):	4000
Delivered Lumens (lm):	1157
System wattage (W):	12.2
Distribution:	Direct
Delivered Efficacy (lm/W):	95

74510D-48-HO

CCT (K):	4000
Delivered Lumens (lm):	2307
System wattage (W):	25.2
Distribution:	Direct
Delivered Efficacy (lm/W):	91


Indirect

74710I-48-REG


CCT (K):	4000
Delivered Lumens (lm):	1469
System wattage (W):	12.2
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74510I-48-HO


CCT (K):	4000
Delivered Lumens (lm):	2925
System wattage (W):	25.3
Distribution:	Indirect
Delivered Efficacy (lm/W):	115

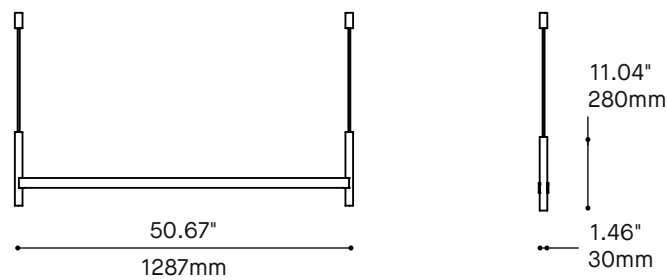

Direct

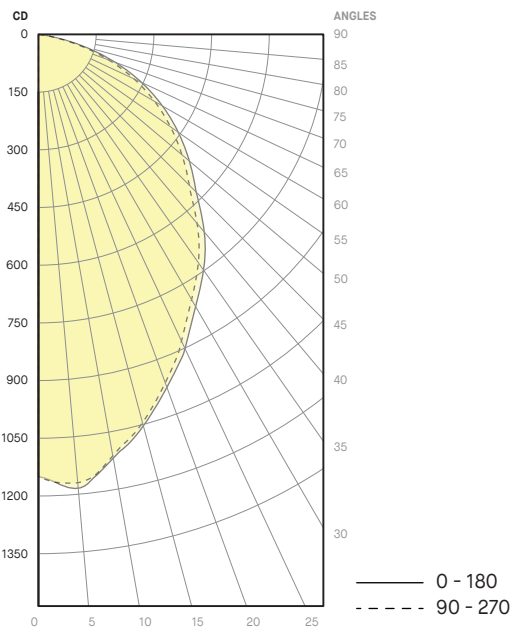

Indirect

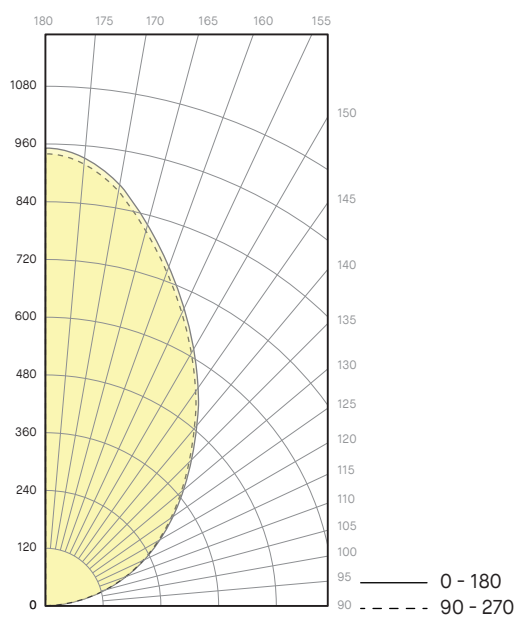

Uplight and downlight are displayed separately.
This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice.
End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.


Direct

74510D-72-REG

CCT (K):	4000
Delivered Lumens (lm):	1735
System wattage (W):	18.3
Distribution:	Direct
Delivered Efficacy (lm/W):	95

74510D-72-HO

CCT (K):	4000
Delivered Lumens (lm):	3460
System wattage (W):	37.9
Distribution:	Direct
Delivered Efficacy (lm/W):	91

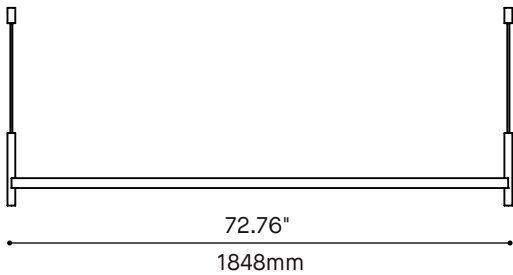


Indirect

74710I-72-REG


CCT (K):	4000
Delivered Lumens (lm):	2203
System wattage (W):	18.4
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74510I-72-HO


CCT (K):	4000
Delivered Lumens (lm):	4384
System wattage (W):	38.1
Distribution:	Indirect
Delivered Efficacy (lm/W):	115



Direct

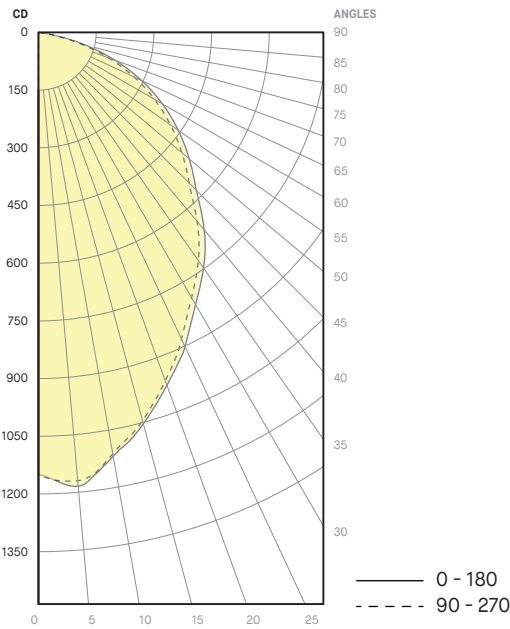

Indirect

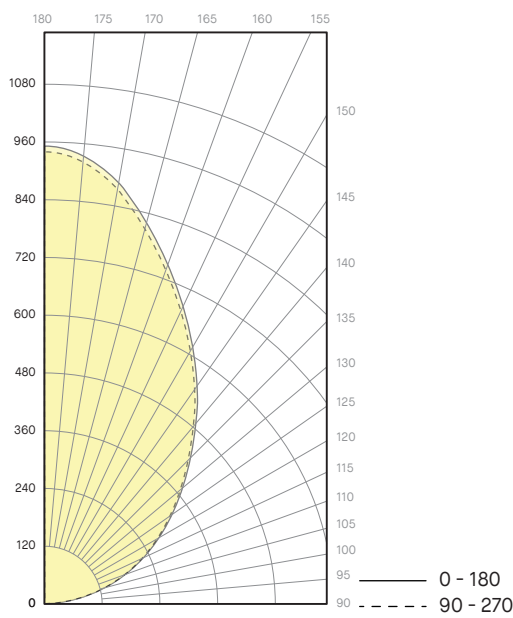

Uplight and downlight are displayed separately.
This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.


Direct

74510D-96-REG

CCT (K):	4000
Delivered Lumens (lm):	2314
System wattage (W):	24.4
Distribution:	Direct
Delivered Efficacy (lm/W):	95

74510D-96-HO

CCT (K):	4000
Delivered Lumens (lm):	4615
System wattage (W):	50.4
Distribution:	Direct
Delivered Efficacy (lm/W):	91

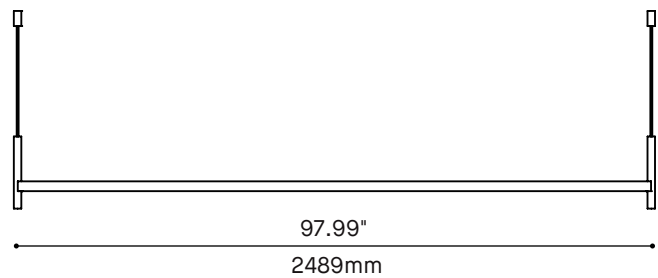

Indirect

74710I-96-REG


CCT (K):	4000
Delivered Lumens (lm):	2937
System wattage (W):	24.4
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74510I-96-HO


CCT (K):	4000
Delivered Lumens (lm):	5854
System wattage (W):	50.6
Distribution:	Indirect
Delivered Efficacy (lm/W):	116



Direct

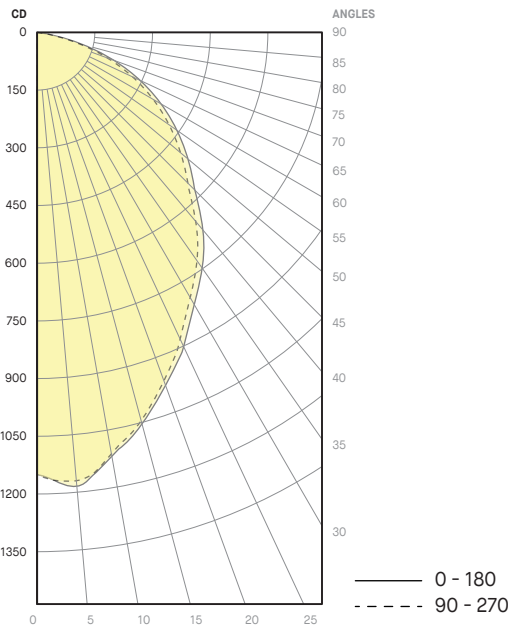

Indirect

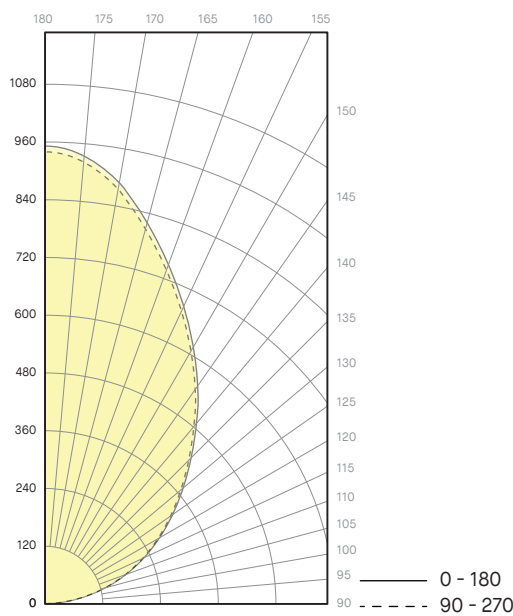

Uplight and downlight are displayed separately.
This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.