


VELIA PENDANT

PROJECT PROJÉT
SPEC TYPE
NOTES



CANOPY FINISH FINI PAVILLON FINISH FINI

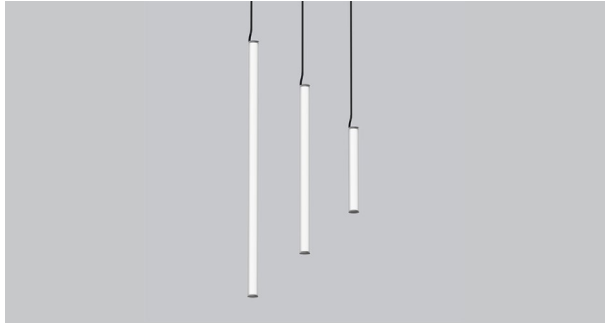

BLKE WHE BLKE WHE

EXTERIOR FILM FINISH FINI FILM EXTÉRIEUR




FRO LIN PRI

INTERIOR FILM FINISH FINI FILM INTÉRIEUR



WHT AML GAML AMD GAMD PIN GPIN PUR GPUR

MOUNTING OPTIONS OPTIONS DE MONTAGE

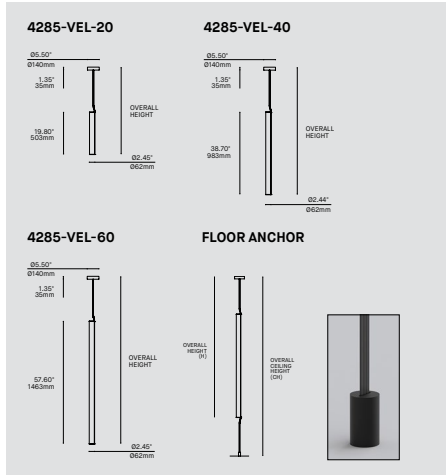

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE CODE

MODEL MODÈLE

4285-VEL VELIA PENDANT

CONFIGURATION CONFIGURATION

20	SINGLE PENDANT	20" 1 HEAD	MIN. HEIGHT 34"
40	SINGLE PENDANT	40" 1 HEAD	MIN. HEIGHT 54"
60	SINGLE PENDANT	60" 1 HEAD	MIN. HEIGHT 74"
202	SINGLE PENDANT	20" 2 HEADS	MIN. HEIGHT 78"
402	SINGLE PENDANT	40" 2 HEADS	MIN. HEIGHT 118"
602	SINGLE PENDANT	60" 2 HEADS	MIN. HEIGHT 158"

LIGHT SOURCE SOURCE LUMINEUSE

LED* REGULAR OUTPUT

LED.HO* HIGH OUTPUT

*4285-VEL-20 ONLY AVAILABLE IN HIGH OUTPUT.
 *4285-VEL-602 ONLY AVAILABLE IN REGULAR OUTPUT.

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K

30 3000K

35 3500K

40* 4000K

*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)

DP PHASE DIMMING (120V ONLY)

NLTAIR2* NLIGHT AIR CONTROL GEN 2

NLIGHT* NLIGHT WIRED CONTROL

* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT)
 * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS*
 REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

EMB* EMERGENCY BATTERY FOR REMOTE BOX

* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION

CABLE CÂBLE

FLC FLAT CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

XX* OVERALL HEIGHT (PLEASE SPECIFY)

* OVERALL HEIGHT (H), MEASURED FROM BOTTOM OF THE FIXTURE TO CEILING, IN INCHES.

MOUNTING MONTAGE

RC ROUND CANOPY / PAVILLON ROND

SCREWLESS 05.50" X 1.35" CANOPY (2473F)

MOUNTING OPTION OPTIONS DE MONTAGE

FA-XX FLOOR ANCHOR / ANCRAGE AU SOL

SPECIFY OVERALL CEILING HEIGHT (CH), MEASURED FROM FLOOR TO CEILING, IN INCHES.

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

FINISH FINI

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

EXTERIOR DIFFUSER FINISH FINI DIFFUSEUR EXTÉRIEUR

FRO FROST

LIN LINEAR

PRI PRISMATIC

INTERIOR DIFFUSER FINISH FINI DIFFUSEUR INTÉRIEUR

WHT WHITE

AML* LIGHT AMBER

GAML* GRADIENT LIGHT AMBER

AMD* DARK AMBER

GAMD* GRADIENT DARK AMBER

PIN* PINK

GPIN* GRADIENT PINK

PUR* PURPLE

GPUR* GRADIENT PURPLE

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

* RECOMMENDED CCT: PLEASE SEE TECH DATA FOR MORE DETAILS.

ACCESSORY ACCESSOIRE

39NLAA* NLIGHT AIR GEN 2 REMOTE CONTROLLER

39NLWA* NLIGHT WIRED REMOTE CONTROLLER

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




SPECIFICATION


VELIA PENDANT 4285-VEL

CONFIGURATION CONFIGURATION


20
Overall Height
Min. 34"/863mm




40
Overall Height
Min. 54"/1371mm

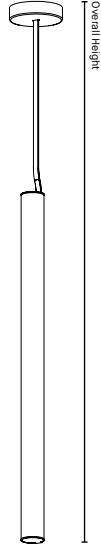


60
Overall Height
Min. 74"/1879mm




202
Overall Height
Min. 78"/1981mm

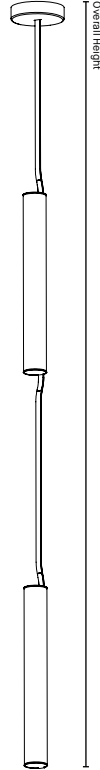

402
Overall Height
Min. 118"/2997mm

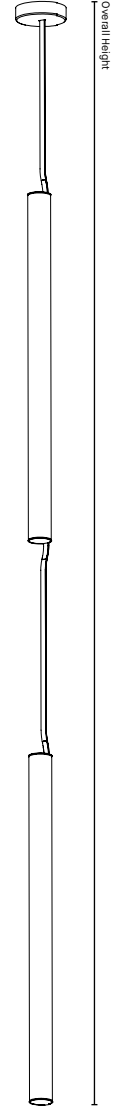

602
Overall Height
Min. 158"/4013mm

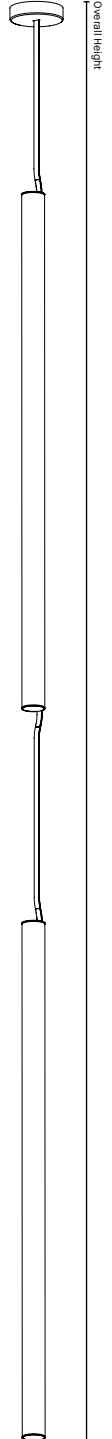

OVERALL HEIGHT

1. The minimum overall height has been calculated using the minimum distance of 12" between the canopy and the first tube. For cable distances longer than 180" please contact the factory.
2. The overall height shown in the illustrations is using the recommended distance of 24" between the canopy and the first tube. It is also the standard distance used between two tubes on one drop.

HAUTEUR TOTALE

1. La hauteur totale minimale a été calculée en utilisant la distance minimale de 12" entre le pavillon et le premier tube. Pour les distances de câble supérieures à 180", veuillez contacter l'usine.
2. La hauteur totale montrée dans les illustrations utilise la distance recommandée de 24" entre le pavillon et le premier tube. C'est la même distance qui est utilisée entre deux tubes un à la suite de l'autre.

CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.

CONFIGURATION PERSONNALISÉE


Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.

FILM OPTIONS

OPTIONS DE FILM

EXTERIOR DIFFUSER FINISHES

FINIS DU DIFFUSEUR EXTÉRIEUR

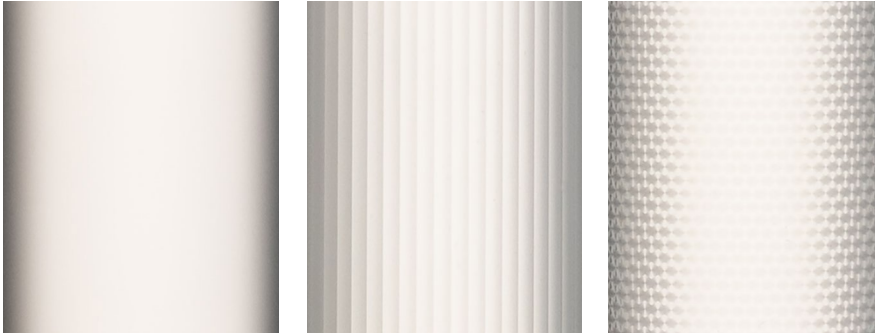

FINISH
FINI

FRO	LIN	PRI
FROST	LINEAR	PRISMATIC

INTERIOR DIFFUSER FINISHES

FINIS DU DIFFUSEUR INTÉRIEUR




FINISH
FINI

WHT	AML	GAML	AMD	GAMD	PIN	GPIN	PUR	GPUR
WHITE	LIGHT AMBER	LIGHT AMBER GRADIENT	DARK AMBER	DARK AMBER GRADIENT	PINK	PINK GRADIENT	PURPLE	PURPLE GRADIENT
2700K-4000K	2700K-3500K	2700K-3500K	2700K-3500K	2700K-3500K	3500K-4000K	3500K-4000K	3500K-4000K	3500K-4000K


RECOMMENDED CCT
CCT RECOMMANDÉ

Reference images shown are all in 3500K with frost finish.
Les images de référence sont toutes en 3500K avec fini frost.

COHESIVE DESIGN
The unique flat cable was meticulously designed to blend seamlessly with the rest of the fixture. It ensures each tube maintains a sleek and continuous look.

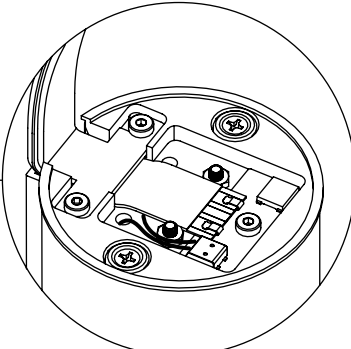

EASILY ADJUSTABLE
Each Velia light fixture comes with a 3D printed tool that was designed to strip and straighten the flat cable on site during installation.




DUAL LAYER OF OPTICAL FILM DIFFUSION

INTERIOR DIFFUSER*
Velia's inner layer of diffusion consists of a thin sheet of PET film that can be customized to add color in each tube. Offered in 9 colored and gradient finishes.


EXTERIOR DIFFUSER*
The outer layer of polycarbonate film diffuser adds depth and texture, emulating the richness of solid glass. Offered in 3 textured finishes.

*Please see film options page for more information.

THREE LENGTHS AND COUNTLESS CONFIGURATIONS
Velia offers three tube lengths of 20", 40" and 60" that can be configured into various clusters. Multiple tubes can also be connected in a single drop.

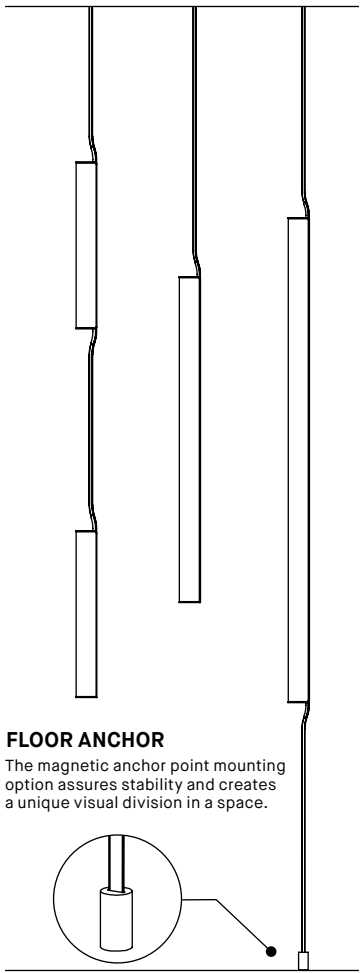


FLOOR ANCHOR
The magnetic anchor point mounting option assures stability and creates a unique visual division in a space.




VELIA SYSTEMS


VELIA PENDANT - 4285-VEL
Standard canopy mounting option for stand alone Velia pendants. Offered with 1 drop.




VELIA LINEAR - 74285-VEL
With the help of a ceiling anchor point, Velia is also offered as a linear fixture.

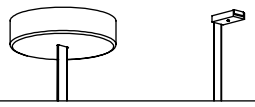

VELIA CHANDELIER - 4427-VEL
16" canopy option providing various chandelier configurations. Offered with 3 or 6 drops.




VELIA DROPLET - 2449-VEL
Remote junction box option that allows for a simple canopy plate. Offered with 1 or 3 drops.



PRODUCT SPECIFICATION	20" TUBE			40" TUBE			60" TUBE		
	LO	REG	HO	LO	REG	HO	LO	REG	HO
PERFORMANCE									
SYSTEM WATTAGE	2.4W	5.0W	10.5W	4.8W	10.0W	21.1W	7.2W	14.9W	31.6W
DELIVERED LUMENS (4000K)	310LM	608LM	1212LM	618LM	1234LM	2424LM	924LM	1852LM	3636LM
EFFICACY	130LM/W	120LM/W	110LM/W	130LM/W	120LM/W	110LM/W	130LM/W	120LM/W	110LM/W
OTHER INFORMATION									
AVG. WEIGHT PER TUBE	1.05LBS / 0.48KG			1.56LBS / 0.71KG			2.07LBS / 0.94KG		
L70 (LUMEN MAINTENANCE)	60,000 HRS			60,000 HRS			60,000 HRS		


EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91




Visit our website for warranty terms and conditions.

DESIGN COHÉRENT
Le câble plat a été soigneusement conçu pour s'intégrer harmonieusement avec le reste du luminaire. Il assure que chaque tube conserve une apparence élégante et continue.

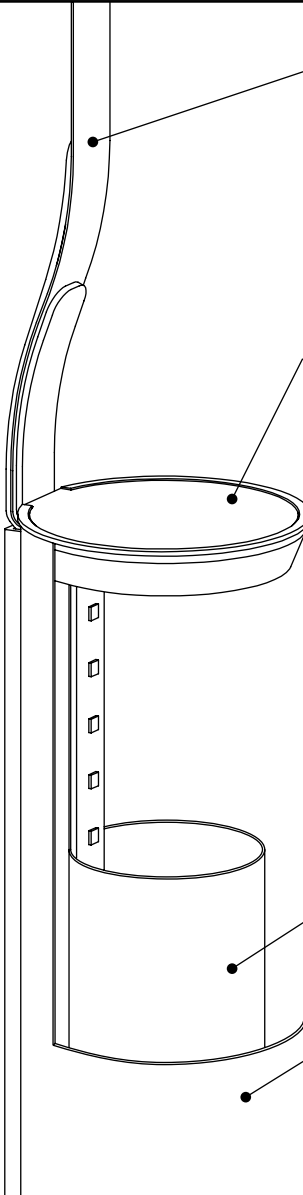

FACILE À AJUSTER
Chaque luminaire Velia est livré avec un outil imprimé en 3D conçu pour dénuder et redresser le câble plat sur place lors de l'installation.




SUPERPOSITION DE FILM DIFFUSEUR OPTIQUE

DIFFUSEUR INTÉRIEUR*
La couche interne de diffusion est composée d'une feuille de film PET qui peut être personnalisée pour ajouter de la couleur dans chaque tube. Disponible en 9 finis colorés et dégradés.


DIFFUSEUR EXTÉRIEUR*
La couche externe du diffuseur en film de polycarbonate ajoute de la profondeur et de la texture, reproduisant la richesse du verre. Disponible en 3 finis texturés.

*Veuillez consulter la page des options de film pour plus d'informations.

TROIS LONGUEURS ET NOMBREUSES CONFIGURATIONS
Velia propose trois longueurs de tubes de 20", 40" et 60" qui sont offerts en multiples configurations. Plusieurs tubes peuvent aussi être connectés un à la suite de l'autre.

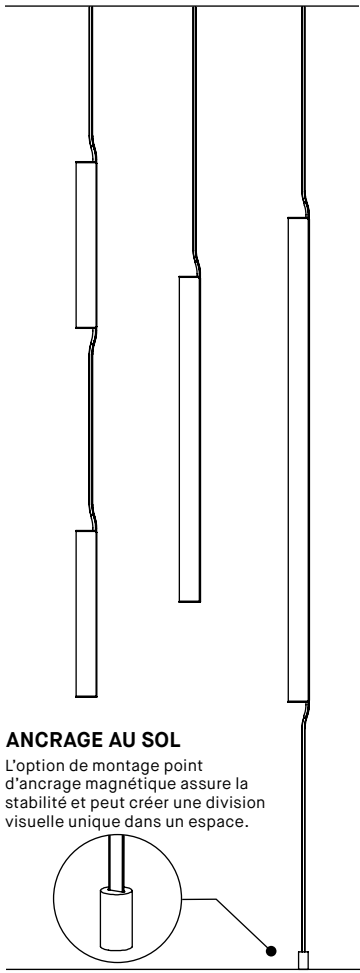


ANCRAGE AU SOL
L'option de montage point d'ancrage magnétique assure la stabilité et peut créer une division visuelle unique dans un espace.




SYSTÈMES VELIA


VELIA PENDANT - 4285-VEL
Option de montage standard pour les suspensions individuelles. Disponible avec une seule suspension.




VELIA LINEAR - 74285-VEL
Avec l'aide d'un point d'ancrage au plafond, Velia est également offert en tant que luminaire linéaire.

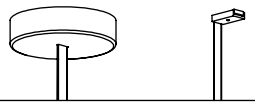

VELIA CHANDELIER - 4427-VEL
Option de pavillon de 16" offrant diverses configurations de chandelier. Disponible avec 3 ou 6 suspensions.




VELIA DROPLET - 2449-VEL
Option de boîte de jonction à distance permettant une plaque de pavillon simple. Disponible avec 1 ou 3 suspensions.



SPÉCIFICATION PRODUIT	20" TUBE			40" TUBE			60" TUBE		
	LO	REG	HO	LO	REG	HO	LO	REG	HO
PERFORMANCE									
PUISSANCE TOTALE	2.4W	5.0W	10.5W	4.8W	10.0W	21.1W	7.2W	14.9W	31.6W
LUMENS RÉELS (4000K)	310LM	608LM	1212LM	618LM	1234LM	2424LM	924LM	1852LM	3636LM
EFFICACITÉ	130LM/W	120LM/W	110LM/W	130LM/W	120LM/W	110LM/W	130LM/W	120LM/W	110LM/W
AUTRES INFORMATIONS									
POIDS PAR TUBE	1.05LBS / 0.48KG			1.56LBS / 0.71KG			2.07LBS / 0.94KG		
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS			60,000 HRS			60,000 HRS		

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visitez notre site Web pour les termes et conditions.