


VELIA LINEAR PENDANT

PROJECT PROJÉT
SPEC TYPE
NOTES



CANOPY FINISH FINI PAVILLON FINISH FINI

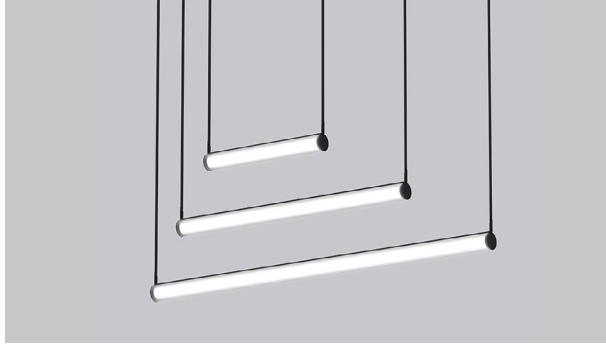

BLKE WHE BLKE WHE

EXTERIOR FILM FINISH FINI FILM EXTÉRIEUR




FRO LIN PRI

INTERIOR FILM FINISH FINI FILM INTÉRIEUR




WHT

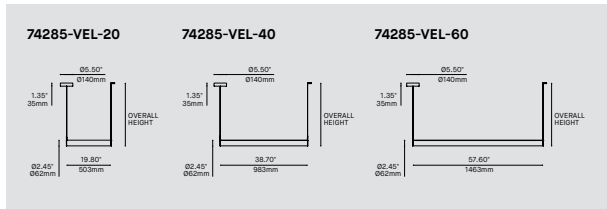

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74285-VEL	VELIA LINEAR PENDANT	
CONFIGURATION CONFIGURATION		
20	LINEAR PENDANT 20"	
40	LINEAR PENDANT 40"	
60	LINEAR PENDANT 60"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	*4285-VEL-20 ONLY AVAILABLE IN HIGH OUTPUT.	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40*	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT)	
	* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS*	
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION	
CABLE CÂBLE		
FLC	FLAT CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
XX*	OVERALL HEIGHT (PLEASE SPECIFY)	
	* OVERALL HEIGHT (H), MEASURED FROM BOTTOM OF THE FIXTURE TO CEILING, IN INCHES.	
MOUNTING MONTAGE		
RC	ROUND CANOPY / PAVILLON ROND	
	SCREWLESS Ø5.50" X 1.35" CANOPY (2473F)	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
FINISH FINI		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
	FLAT CABLE FINISH FOLLOWS FIXTURE FINISH.	
EXTERIOR DIFFUSER FINISH FINI DIFFUSEUR EXTÉRIEUR		
FRO	FROST	
LIN	LINEAR	
PRI	PRISMATIC	
INTERIOR DIFFUSER FINISH FINI DIFFUSEUR INTÉRIEUR		
WHT	WHITE	
ACCESSORY ACCESSOIRE		
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER	
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER	
	* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




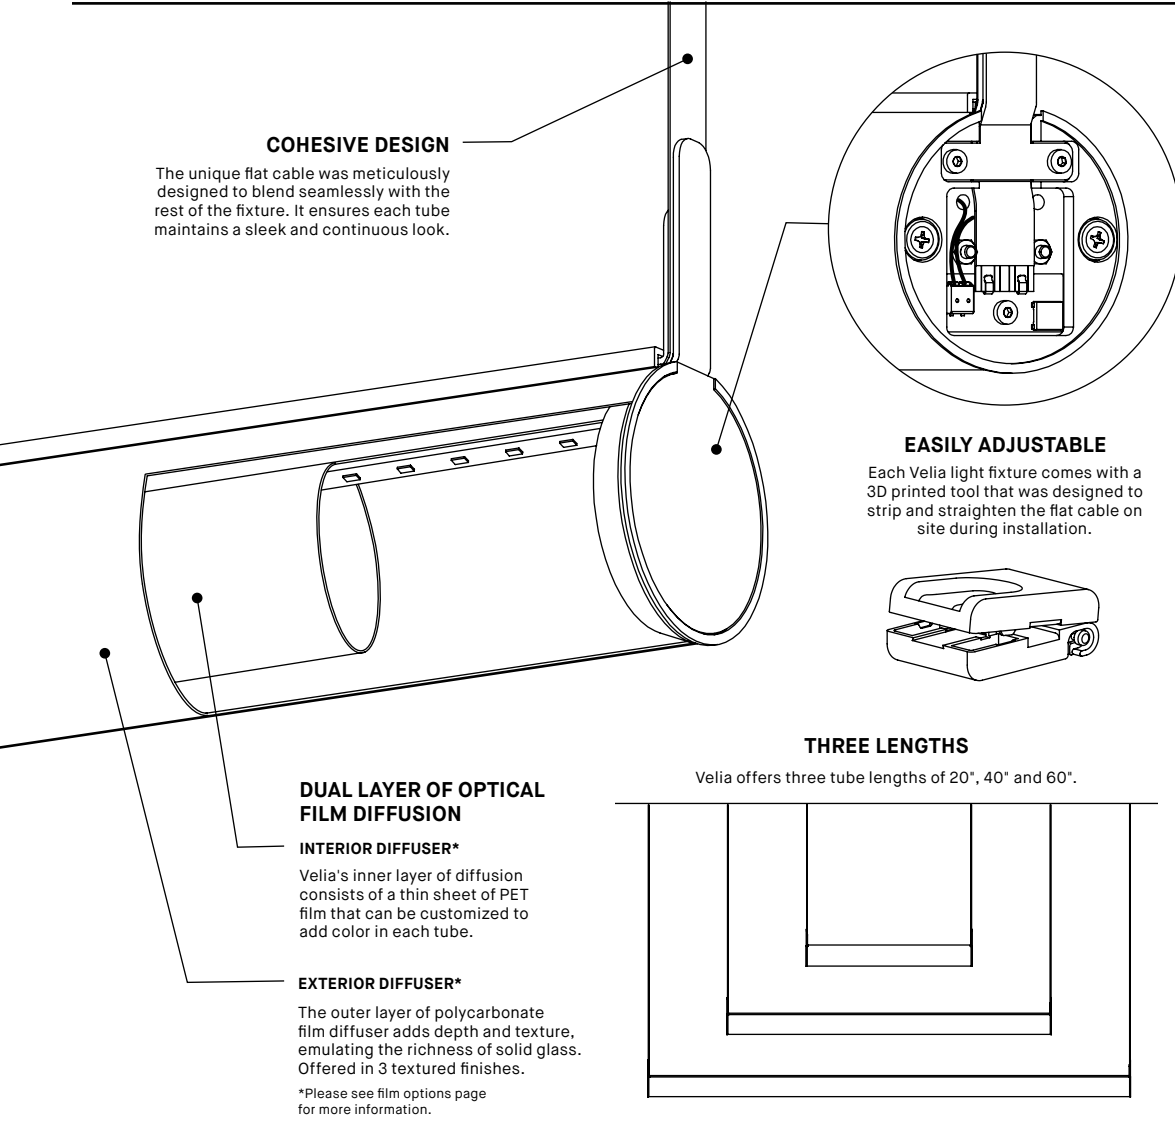

VELIA SYSTEMS


VELIA PENDANT - 4285-VEL

Standard canopy mounting option for stand alone Velia pendants. Offered with 1 drop.




VELIA LINEAR - 74285-VEL

With the help of a ceiling anchor point, Velia is also offered as a linear fixture.




VELIA CHANDELIER - 4427-VEL

16" canopy option providing various chandelier configurations. Offered with 3 or 6 drops.



VELIA DROPLET - 2449-VEL

Remote junction box option that allows for a simple canopy plate. Offered with 1 or 3 drops.




PRODUCT SPECIFICATION	20" TUBE		40" TUBE		60" TUBE	
	HO	REG	HO	REG	HO	REG
PERFORMANCE						
SYSTEM WATTAGE	10.5W	10.0W	21.1W	14.9W	31.6W	
DELIVERED LUMENS (4000K)	1212LM	1234LM	2424LM	1852LM	3636LM	
EFFICACY	110LM/W	120LM/W	110LM/W	120LM/W	110LM/W	
OTHER INFORMATION						
AVG. WEIGHT PER TUBE	1.05LBS / 0.48KG	1.56LBS / 0.71KG		2.07LBS / 0.94KG		
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS		60,000 HRS		

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91


LIGHT DISTRIBUTION



74285-VEL



Visit our website for warranty terms and conditions.

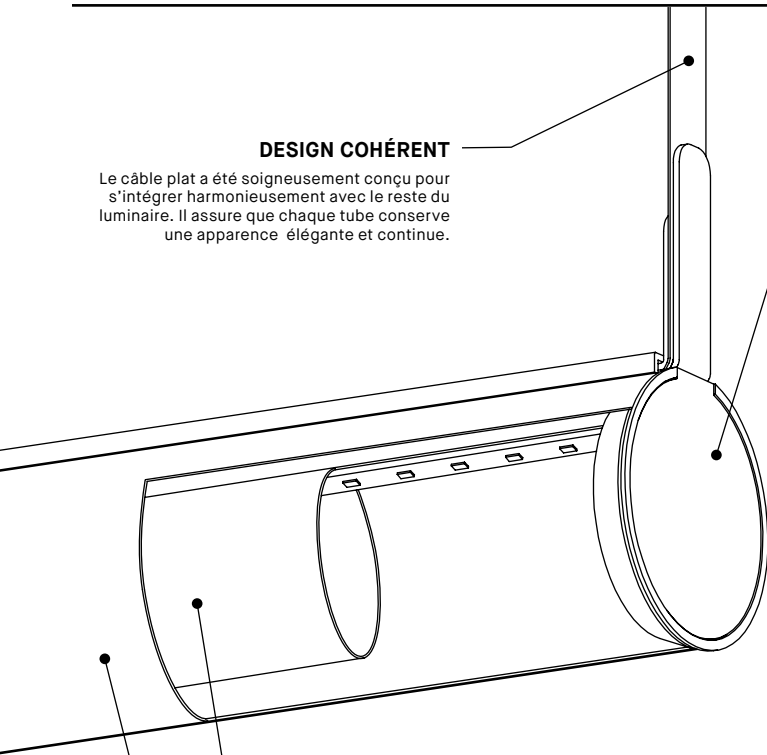

DESIGN COHÉRENT

Le câble plat a été soigneusement conçu pour s'intégrer harmonieusement avec le reste du luminaire. Il assure que chaque tube conserve une apparence élégante et continue.

SUPERPOSITION DE FILM DIFFUSEUR OPTIQUE


DIFFUSEUR INTÉRIEUR*

La couche interne de diffusion est composée d'une feuille de film PET qui peut être personnalisée pour ajouter de la couleur dans chaque tube.

DIFFUSEUR EXTÉRIEUR*


La couche externe du diffuseur en film de polycarbonate ajoute de la profondeur et de la texture, reproduisant la richesse du verre. Disponible en 3 finis texturés.

*Veuillez consulter la page des options de film pour plus d'informations.

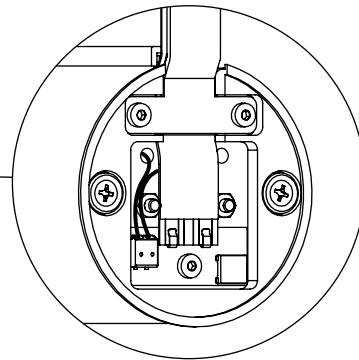


FACILE À AJUSTER

Chaque luminaire Velia est livré avec un outil imprimé en 3D conçu pour dénuder et redresser le câble plat sur place lors de l'installation.



TROIS LONGUEURS


Velia propose trois longueurs de tubes de 20", 40" et 60".

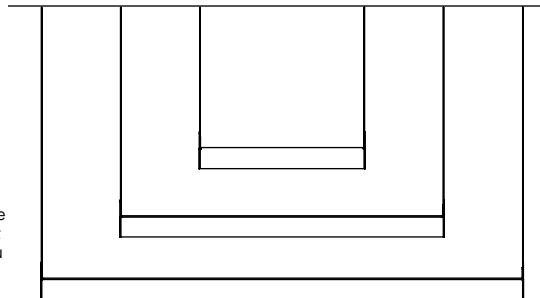

SYSTÈMES VELIA


VELIA PENDANT - 4285-VEL

Option de montage standard pour les suspensions individuelles. Disponible avec une seule suspension.




VELIA LINEAR - 74285-VEL

Avec l'aide d'un point d'ancrage au plafond, Velia est également offert en tant que luminaire linéaire.




VELIA CHANDELIER - 4427-VEL

Option de pavillon de 16" offrant diverses configurations de chandelier. Disponible avec 3 ou 6 suspensions.



VELIA DROPLET - 2449-VEL

Option de boîte de jonction à distance permettant une plaque de pavillon simple. Disponible avec 1 ou 3 suspensions.




SPÉCIFICATION PRODUIT

SPÉCIFICATION PRODUIT	20" TUBE		40" TUBE		60" TUBE	
	HO	REG	HO	REG	HO	REG
PERFORMANCE						
PUISSANCE TOTALE	10.5W	10.0W	21.1W	14.9W	31.6W	
LUMENS RÉELS (4000K)	1212LM	1234LM	2424LM	1852LM	3636LM	
EFFICACITÉ	110LM/W	120LM/W	110LM/W	120LM/W	110LM/W	
AUTRES INFORMATIONS						
POIDS PAR TUBE	1.05LBS / 0.48KG	1.56LBS / 0.71KG		2.07LBS / 0.94KG		
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS		60,000 HRS		

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE



74285-VEL



Visitez notre site Web pour les termes et conditions.