


# ARENA 8200



PROJECT PROJÉT
SPEC TYPE
NOTES



## FAMILY FAMILLE

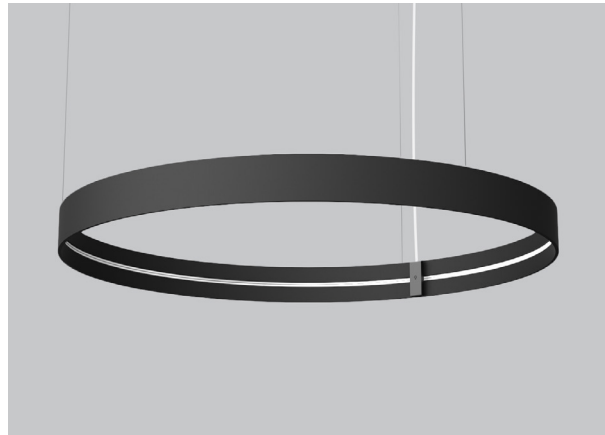

## MOUNTING OPTIONS OPTIONS DE MONTAGE

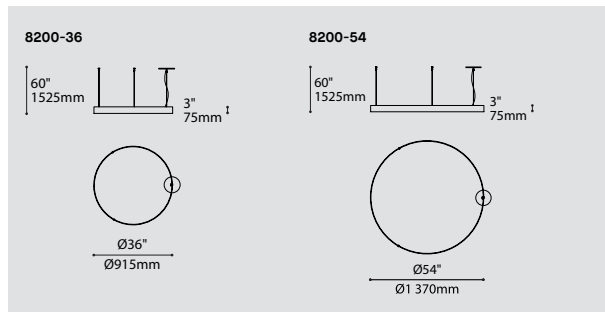

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

**8200-36** ARENA 36"  
**8200-54** ARENA 54"

### MAXIMUM DC LOAD PUISSANCE MAXIMALE DC

**90W** 90 WATT DC  
 TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.

RING
ARENA 8200-36 & 8200-54
MAXIMUM DC LOAD <b>90W</b>

LIGHT SOURCES				
BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>11W DC</b>

### VOLTAGE VOLTAGE

**120V** 120 VOLT  
**277V** 277 VOLT

### CONTROL OPTION OPTION DE CONTRÔLE

**DV** 0-10V DIMMING (120V-277V)  
**NLTAIR2\*** NLIGHT AIR CONTROL GEN 2 (NOT AVAILABLE WITH MOUNTING OPTION RC3)  
**NLIGHT\*** NLIGHT WIRED CONTROL (NOT AVAILABLE WITH MOUNTING OPTION RC3)  
 LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT  
 \*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

### DRIVER POSITION POSITION DE L'ALIMENTATION

**RDP \*** RECESSED DRIVER  
 \* 3981C IS REQUIRED

### CABLE CÂBLE

**AC** AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

### CABLE LENGTH LONGUEUR DE CÂBLE

**60** 60" AIRCRAFT CABLE (STD LENGTH)  
**\*\*** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)  
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

### MOUNTING MONTAGE

**RC1** ROUND CANOPY ON JBOX FOR RECESSED DRIVERS 0.5" (2475C)  
**RC2** ROUND SURFACE SCREWLESS CANOPY 1.87" (2475I)  
**RC3** ROUND SURFACE SCREWLESS CANOPY 0.50" FOR REMOTE DRIVER BOX 12"X16" (2471C)  
 \* PAIR WITH ACCESSORY 3981GA

### MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD

**RCC** CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES

### CANOPY FINISH FINI PAVILLON

**BLKE** BLACK FINE TEXTURE  
**WHE** WHITE FINE TEXTURE

### POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

**BLK** BLACK POWER CORD  
**WH** WHITE POWER CORD  
**CLR** CLEAR POWER CORD

### RING FINISH FINI DE L'ANNEAU

**BLKE** BLACK FINE TEXTURE  
**WHE** WHITE FINE TEXTURE

### ACCESSORY ACCESSOIRE

**3981C** JUNCTION BOX FOR RECESSED DRIVER OPTION SQ1 OR RC1  
**3981GA** REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W  
**39NLAA\*** NLIGHT AIR GEN 2 REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)  
**39NLWA\*** NLIGHT WIRED REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)  
 \* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.




SPECIFICATION

# ARENA 8200-XX

## EVOLVING LIGHT

ARENA is the circular base profile that supports and powers a variety of compatible light sources which can be combined and positioned as desired.


The ARENA will accommodate a choice of light sources which can be customized in quantity, position, orientation and combinations to provide users with a tailored solution for their space.

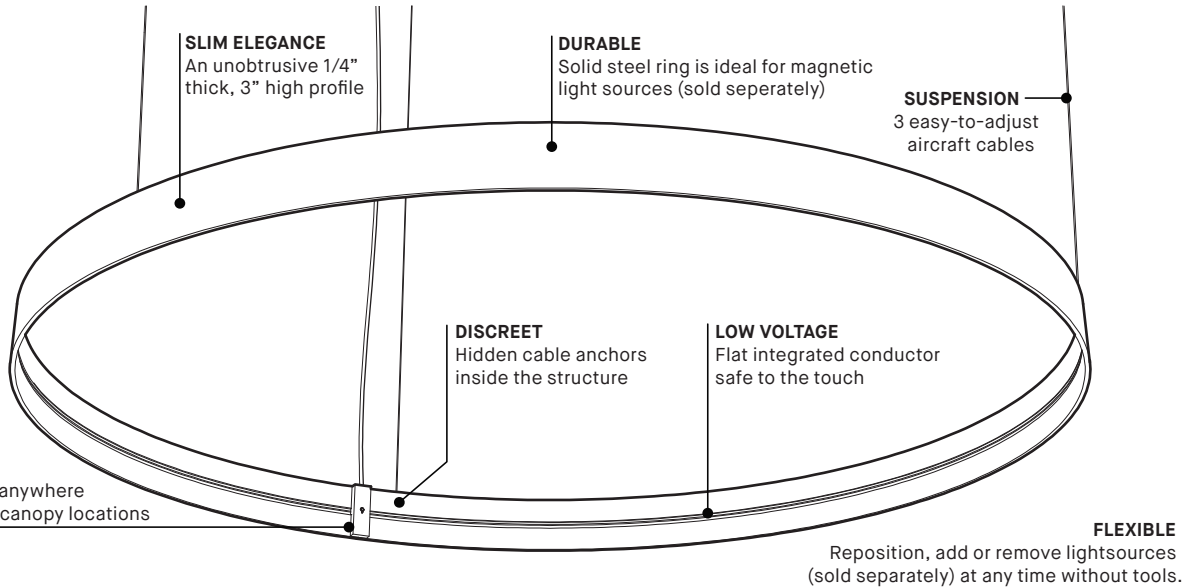

## RELOCATE

Easily relocated power feed to anywhere around the ring for flexibility in canopy locations

## SIZES



2 sizes allow multiple combinations for a variety of spaces


## CANOPY POSITION



**Standard (fixed location)**  
Centered with mounting point

**RCC (flexible location)**  
Independent from the mounting point

## CANOPY TYPE







**STANDARD CANOPY 9.4"X1.88"**  
Mounting on a 4" standard j-box

**LOW PROFILE CANOPY 9.4"X0.25"**  
Mounting on Eureka box 3981C (sold separately, can be shipped and installed in advance)  
Recessed driver for discreet installation  
Min. 3.5" inside ceiling clearance required

## LIGHT SOURCES :

Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined

Please refer to their individual product pages for more information



## PRODUCT SPECIFICATION

8200-36

8200-54

### PERFORMANCE

	8200-36	8200-54
<b>MAXIMUM DC LOAD</b>	90 W	90 W
<b>LIGHT SOURCES (SOLD SEPERATELY)</b>	REFER TO 8290, 8291, 8292, 8293	REFER TO 8290, 8291, 8292, 8293

### OTHER INFORMATION

	8200-36	8200-54
<b>LUMINAIRE'S WEIGHT</b>	24 LBS / 11 KG (MAX. 35 LBS / 16 KG WITH 12 LIGHT SOURCES)	40 LBS / 18 KG (MAX. 52 LBS / 24 KG WITH 12 LIGHT SOURCES)



Visit our website for warranty terms and conditions.



## TECHNICAL DATA

# ARENA 8200-XX


## LUMIÈRE ÉVOLUTIVE

ARENA est la base circulaire qui supporte et alimente une variété de sources lumineuses compatibles pouvant être combinées et positionnées selon vos désirs

ARENA accomodera un choix de sources lumineuses pouvant être personnalisées en quantité, position, orientation et combinaison afin de permettre à l'usager une solution adaptée à l'espace

## RELOCALISEZ

Source d'alimentation amovible pouvant être relocalisée sur l'anneau afin d'accomoder la localisation du pavillon

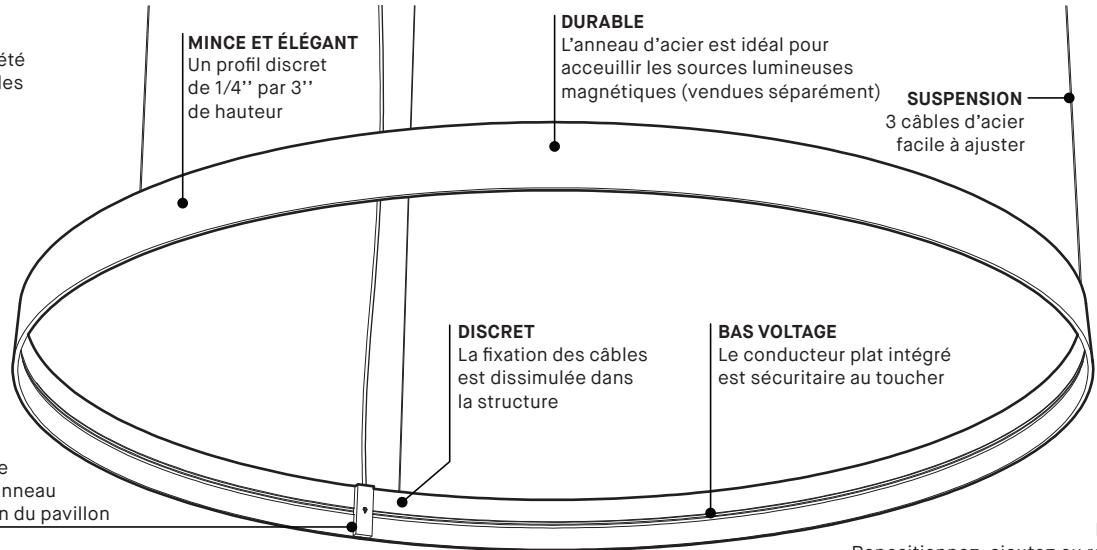

**MINCE ET ÉLÉGANT**  
Un profil discret de 1/4" par 3" de hauteur

## DURABLE

L'anneau d'acier est idéal pour accueillir les sources lumineuses magnétiques (vendues séparément)

**SUSPENSION**  
3 câbles d'acier facile à ajuster

## DISCRET

La fixation des câbles est dissimulée dans la structure


## BAS VOLTAGE

Le conducteur plat intégré est sécuritaire au toucher

## FLEXIBLE

Repositionnez, ajoutez ou retirez des sources lumineuses (vendues séparément) en tout temps et sans outils.

## TAILLES



2 tailles  
Permettent une multitude de combinaisons pour une variété d'espaces.


## POSITION DU PAVILLON




**Standard (location fixe)**  
Centré avec un point de montage

**RCC (location flexible)**  
Indépendant du point de montage

## TYPE DE PAVILLON



**PAVILLON STANDARD 9.4"X1.88"**  
Installation sur une boîte de jonction 4" standard







**PAVILLON BAS PROFILE 9.4"X0.25"**  
Installation sur une boîte Eureka 3981C (vendue séparément, peut être livrée séparément pour une installation en avance) Jeu de 3.5" minimum dans le plafond requis

## SOURCES LUMINEUSES :

Plusieurs accessoires lumineux sont disponibles pour ARENA. Vendues séparément dans la quantité et le type désiré. Les modèles peuvent être combinés

Se référer aux pages individuelles des produits pour plus d'information



## SPÉCIFICATION PRODUIT

8200-36

8200-54

### PERFORMANCE

#### PUISSANCE MAXIMALE DC

90 W

90 W

#### SOURCES LUMINEUSES (VENDUES SÉPARÉMENT)

VOIR 8290, 8291, 8292, 8293

VOIR 8290, 8291, 8292, 8293

### AUTRES INFORMATION

#### POIDS DU LUMINAIRE

24 LBS / 11 KG  
(MAX. 35 LBS / 16 KG AVEC 12 SOURCES LUMINEUSES)

40 LBS / 18 KG  
(MAX. 52 LBS / 24 KG AVEC 12 SOURCES LUMINEUSES)








Visitez notre site Web pour les termes et conditions.






## DONNÉES TECHNIQUES


# Arena Mapping

MIXING LIGHT SOURCES IS POSSIBLE AND RECOMMENDED. TO HELP YOU DO SO, SUBSTRACT THE DC LOAD OF EACH LIGHT SOURCE FROM THE MAXIMUM DC LOAD OF ARENA.  
DO NOT EXCEED MAXIMUM WEIGHT PER SIDE





<b>LUMINAIRE</b>	<b>FRAME CONFIGURATION</b> *REFER TO 2D DRAWINGS FOR EACH SIZE.	<b>ARENA RING</b>	<b>ARENA SQUARE &amp; RECTANGLE</b>			
		8200-36 8200-54	8220-36X36 8220-36X54	8220-54X54 8220-36X96 8220-54X96 8220-96X96	8220-36X190 8220-54X190 8220-96X190 8220-190X190	8220-36X380 8220-54X380 8220-96X380 8220-190X380 8220-380X380
						
	<b>MAXIMUM TOTAL DC LOAD OF ACCESSORY</b>	<b>90W DC</b>	<b>90W DC</b>	<b>180W</b> (90W DC PER 2 SIDES)	<b>360W</b> (90W DC PER SIDES)	<b>540W, 720W</b> (90W DC PER SECTION)
<b>MAXIMUM TOTAL WEIGHT OF ACCESSORY</b>	<b>25 LBS</b>	<b>25 LBS / SIDE</b>	<b>25 LBS / SIDE</b>	<b>25 LBS / SECTION</b>	<b>25 LBS / SECTION</b>	

<b>LUMINAIRE</b>	<b>FRAME CONFIGURATION</b> *REFER TO 2D DRAWINGS FOR EACH SIZE.	<b>ARENA STRAIGHT</b>		
		8210-36 (1 SECTION) 8210-54 (1 SECTION) 8210-70 (2 SECTIONS)	8210-96 (1 SECTION) 8210-158 (3 SECTIONS) 8210-190 (2 SECTIONS)	8210-284 (3 SECTIONS) 8210-380 (4 SECTIONS)
				
	<b>MAXIMUM TOTAL DC LOAD OF ACCESSORY</b>	<b>90W (90W DC FOR BOTH SIDES)</b>	<b>180W (90W DC PER SECTION)</b>	<b>360W DC (90W DC PER SECTION)</b>
<b>MAXIMUM TOTAL WEIGHT OF ACCESSORY</b>	<b>25 LBS / SECTION</b>	<b>25 LBS / SECTION</b>	<b>25 LBS / SECTION</b>	

<b>ACCESSORIES HEAD</b>	<b>LIGHT SOURCES</b>	<b>BEAM</b> 8290	<b>GLOW</b> 8291	<b>AIM</b> 8292	<b>CONE</b> 8294	<b>BALL</b> 8295
						
	<b>DC LOAD</b>	<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>11W DC</b>	<b>8W DC</b>
	<b>WEIGHT LBS</b>	<b>0.62 LBS</b>	<b>0.70 LBS</b>	<b>0.61 LBS</b>	<b>0.88 LBS</b>	<b>0.48 LBS</b>

<b>ACCESSORIES SLICE</b>	<b>LIGHT SOURCES</b>	<b>SLICE-ROUND 8293 (ONLY FOR 8200)</b>		<b>SLICE-SQUARE 8296</b>	
		8293-36	8293-54	8296-36	8296-54
					
	<b>DC LOAD</b>	<b>8W DC</b>	<b>11W DC</b>	<b>8W DC</b>	<b>11W DC</b>
<b>WEIGHT LBS</b>	<b>1.24 LBS</b>	<b>1.65 LBS</b>	<b>2.22 LBS</b>	<b>3.50 LBS</b>	


<b>ACCESSORIES ADAPTER</b>	<b>LIGHT SOURCES</b>	<b>MILL 14"</b> 4277D-14	<b>SCOUT 02.75"</b> 4048-XX	<b>SCOUT 04"</b> 4049-XX	<b>MIKA 8"</b> 4230-8	<b>BLOOM</b> 4269-XX	<b>MINI MUTE</b> 4258-16	<b>CELESTE</b> 4010-CEL1
								
	<b>DC LOAD</b>	<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>8W DC</b>	<b>11W DC</b>	<b>4W DC</b>
	<b>WEIGHT LBS</b>	<b>11.3 LBS</b>	<b>MAX 4.32 LBS</b>	<b>MAX 6.05 LBS</b>	<b>2.40 LBS</b>	<b>MAX 9.75 LBS</b>	<b>5.83 LBS</b>	<b>2.20 LBS</b>

<b>ACCESSORIES ACOUSTIC</b>	<b>ACOUSTIC CONFIGURATION</b>	<b>ACOUSTIC BAFFLE FOR ARENA SQUARE</b>		<b>ACOUSTIC BAFFLE FOR ARENA STRAIGHT</b>	
		8297-40	8297-58	8298-40	8298-58
					
	<b>WEIGHT LBS</b>	<b>1.38 LBS / PANEL</b>	<b>1.63 LBS / PANEL</b>	<b>1.38 LBS / PANEL</b>	<b>1.63 LBS / PANEL</b>
<b>CONFIGURATION USE FOR ARENA</b>	8220-36X36 8220-36X54 8220-36X96	8220-54X54 8220-36X54 8220-54X96	8210-XX 8220-XX	8210-XX 8220-XX	

\*WE RESERVE THE RIGHT TO MODIFY ANY INFORMATION AT ANY TIME.

# ARENA – BEAM 8290

PROJECT PROJET
SPEC TYPE
NOTES

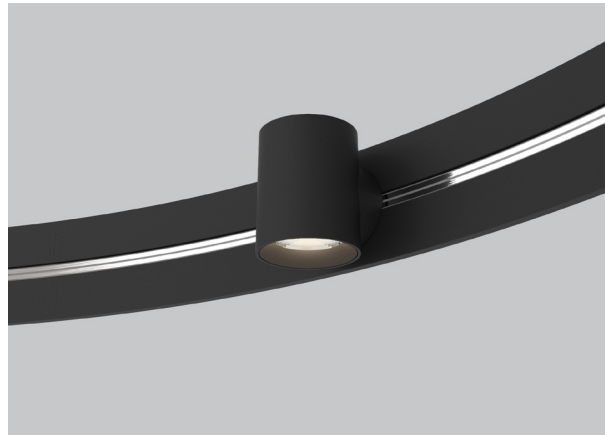

## FAMILY FAMILLE



## FINISH FINI



## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE	8290
8290*	ARENA – BEAM * ARENA – BEAM IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)
LIGHT SOURCE SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
27	2700K
30	3000K
35	3500K
40	4000K
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)	
80	80+CRI
BEAM ANGLE ANGLE DE FAISCEAU	
NA	NARROW (16°)
ME	MEDIUM (26°)
WI	WIDE (45°)
PROJECTOR FINISH FINI PROJECTEUR	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES	
CLR	CLEAR GLASS LENS
FRO	FROSTED LENS
HON	HONEYCOMB LOUVER
SOL	SOLITE SOFTENING LENS

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	ARENA – BEAM is a classic yet modern 62mm diameter spot accessory for ARENA (8200). The accessory rotates 90° in each direction and the light source can be flipped on the ring for direct or indirect illumination. ARENA – BEAM hides discreetly behind the ring's height and shines brightly above or below.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – BEAM can be installed on each ARENA or can be combined with other accessories for a total load of up to 90W.
LIGHT SOURCE:	COB LED with light collimating reflector offered in three beam angles: 16°, 26° or 45°. Optical accessories such as clear and frosted lens, a Solite softening lens and honeycomb louvers can be added to each projector to precisely control the emitted light.
PROJECTOR:	Custom designed diecast aluminum heatsink offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	ARENA – BEAM est un projecteur de 62mm au look moderne pour ARENA (8200). L'accessoire pivote 90° dans chaque direction et peut être inversé sur l'anneau pour un éclairage vers le haut ou vers le bas. ARENA – BEAM se dissimule discrètement derrière la hauteur de l'anneau tout en procurant une lumière directe ou indirecte.
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Un maximum de 12 ARENA – BEAM peuvent être installés sur chaque ARENA ou être combinés avec d'autres accessoires jusqu'à une charge maximale de 90W.
SOURCE LUMINEUSE:	LED de type COB avec réflecteur collimateur de lumière offert en trois angles de faisceau: 16°, 26° ou 45°. Accessoires optiques tels que des lentilles transparentes, dépolies, en nid d'abeille ou Solite peuvent être ajoutées sur chaque projecteur afin de contrôler plus précisément la lumière émise.
PROJECTEUR:	Dissipateur thermique en aluminium moulé conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
CERTIFIÉ:	c-CSA-us

## REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
ARENA 8200-36 & 8200-54	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC

# ARENA – GLOW 8291


PROJECT PROJÉT
SPEC TYPE
NOTES



## FAMILY FAMILLE



ARENA 8200



ARENA – BEAM 8290

## FINISH FINI



BLKE



ARENA – AIM 8292



ARENA – SLICE 8293



WHE



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		8291
8291*	ARENA – GLOW * ARENA – GLOW IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)		
80	80+CRI	
PROJECTOR FINISH FINI PROJECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		FRO
FRO	FROSTED LENS	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** With its thick clear-cut crystalline diffuser, ARENA – GLOW adds a touch of ambient luxury to the stately ARENA (8200) ring profile. Using the same 62mm body of ARENA – BEAM, the accessory rotates 90° in each direction and can be flipped vertically on the ring to enable direct or indirect illumination.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – GLOW can be installed on each ARENA or can be combined with other accessories for a total load of up to 90W.
- LIGHT SOURCE:** COB LED combined with machined acrylic diffuser. The diffuser has a frosted interior surface for a smooth light diffusion and a perfectly polished exterior giving it a jewel-like look. Custom designed diecast aluminum heatsink offered in white or black architectural grade finish. c-CSA-us
- CONCEPTION:** Avec son diffuseur massif et cristallin, ARENA – GLOW ajoute une touche luxueuse à l'anneau ARENA (8200). En utilisant le même corps de 62 mm de ARENA – BEAM, l'accessoire pivote sur 90° dans chaque direction et peut être inversé sur l'anneau pour une illumination directe ou indirecte.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Un maximum de 12 ARENA – GLOW peuvent être installés sur chaque ARENA ou être combinés avec d'autres accessoires jusqu'à une charge maximale de 90W.
- SOURCE LUMINEUSE:** LED de type COB combiné à un diffuseur en acrylique usiné. Le diffuseur a une surface intérieure givrée pour une diffusion douce de la lumière et un extérieur parfaitement poli lui attribuant un aspect luxueux.
- PROJECTEUR:** Dissipateur thermique en aluminium moulé conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

## REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
ARENA 8200-36 & 8200-54	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC

# ARENA – AIM 8292

PROJECT PROJÉT
SPEC TYPE
NOTES

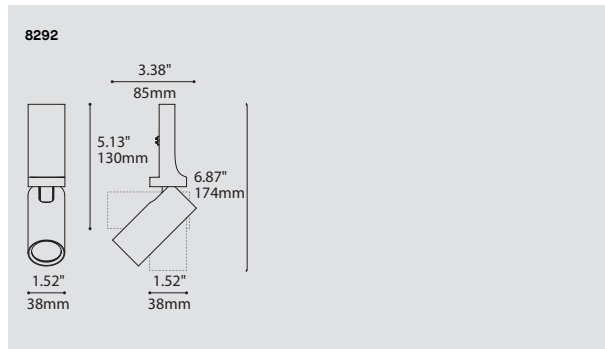

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		<b>8292</b>
<b>8292*</b>	ARENA – AIM * ARENA – AIM IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		<b>LED</b>
<b>LED</b>	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
<b>27</b>	2700K	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
<b>COLOR RENDERING INDEX</b> INDICE DE RENDU DE COULEUR (IRC)		
<b>80</b>	80+CRI	
<b>BEAM ANGLE</b> ANGLE DE FAISCEAU		
<b>NA</b>	NARROW (19°)	
<b>WI</b>	WIDE (30°)	
<b>PROJECTOR FINISH</b> FINI PROJECTEUR		
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>WHE</b>	WHITE FINE TEXTURE	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** ARENA – AIM is an elegant 38mm diameter aimable projector for ARENA (8200). The head rotates at 350° and can be tilted up to 90° inwards or outward for a wider lighting surface area. ARENA – AIM can also be flipped vertically on the ring to enable direct or indirect illumination.

**INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – AIM projectors can be installed on each ARENA or can be combined with other accessories for a total of up to 90W.

**LIGHT SOURCE:** COB LED with a 32mm silicone collimator available in 19° & 30° beam angles.

**PROJECTOR:** Custom designed diecast aluminum heatsink offered in white or black architectural grade finish.

**CERTIFIED:** c-CSA-us

**CONCEPTION:** ARENA – AIM est un projecteur dirigeable élégant de 38mm pour ARENA (8200). La tête pivote à 350° et incline à 90° vers l'intérieur ou l'extérieur pour une surface d'éclairage élargie. ARENA – AIM peut être inversé verticalement pour une illumination directe ou indirecte.

**INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration sur place. Un maximum de 12 projecteurs ARENA – AIM peuvent être installés sur chaque ARENA ou peuvent être combinés avec d'autres accessoires pour une puissance totale jusqu'à 90W.

**SOURCE LUMINEUSE:** LED de type COB avec un collimateur en silicone de 32 mm offert en deux angles de faisceau: 19° ou 30°.

**PROJECTEUR:** Dissipateur thermique en aluminium moulé conçu sur mesure, offert avec une finition noire ou blanche finement texturée de grade architectural.

**CERTIFIÉ:** c-CSA-us

## REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
ARENA 8200-36 & 8200-54					
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC




# ARENA – SLICE 8293


PROJECT PROJÉT
SPEC TYPE
NOTES



## FAMILY FAMILLE



ARENA 8200



ARENA – BEAM 8290

## FINISH FINI




BLKE



ARENA – GLOW 8291



ARENA – AIM 8292



WHE

<p><b>8293-36</b></p> <p>1.46" / 37mm</p> <p>2.97" / 75mm</p> <p>33.20" / 843mm</p>	<p><b>8293-54</b></p> <p>1.46" / 37mm</p> <p>2.97" / 75mm</p> <p>49.50" / 1257mm</p>
---	--

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

**8293-36\*** ARENA – SLICE 36" (ONLY FOR 8200-36)

**8293-54\*** ARENA – SLICE 54" (ONLY FOR 8200-54)

\*ARENA – SLICE IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)

### LIGHT SOURCE SOURCE LUMINEUSE

LED

**LED** REGULAR OUTPUT, 8W FOR 8293-36 & 11W FOR 8293-54\*

TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.  
\*A MAXIMUM OF 4 ARENA – SLICE CAN BE ATTACHED TO A SINGLE ARENA 8200

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27	2700K
30	3000K
35	3500K
40	4000K

### COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)

80	80+CRI
90*	90+CRI

### END CAPS FINISH FINI EMBOUTS

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

### DIFFUSER FINISH FINI DIFFUSEUR

WH

WH	WHITE
----	-------

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



### DESIGN:

ARENA – SLICE is an eye-catching graphic linear light source for ARENA (8200). Up to four accessories can be arranged or intersected on an ARENA ring creating unique pattern effects.

### INSTALLATION:

Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 4 ARENA – SLICE can be installed on each ARENA or can be combined with other accessories for a total load of up to 90W.

### LIGHT SOURCE:

LED linear light engine with custom engineered acrylic diffuser. Each ARENA – SLICE can be rotated 180° on-site for direct or indirect illumination and can be placed on overlapping heights for a unique intersecting look.

### END CAPS:

Custom designed aluminum extrusion with aluminum diecast endcaps offered in white or black architectural grade finish.

### CERTIFIED:

c-CSA-us

### CONCEPTION:

ARENA – SLICE est une source lumineuse linéaire contemporaine pour ARENA (8200). Jusqu'à quatre accessoires peuvent être installés ou intersectés sur l'anneau ARENA créant ainsi des motifs d'éclairage uniques.

### INSTALLATION:

Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Un maximum de 4 ARENA – SLICE peuvent être installés sur chaque ARENA ou être combinés avec d'autres accessoires jusqu'à une charge maximale de 90W.

### SOURCE LUMINEUSE:

Source LED linéaire avec diffuseur en acrylique conçu sur mesure. Chaque ARENA – SLICE peut être pivoté sur 180° pour un éclairage direct ou indirect et peuvent être placés sur deux niveaux superposés pour un effet de lignes entrecroisées.

### EMBOUITS:

Extrusion en aluminium conçue sur mesure avec embouts en aluminium moulés offert avec une finition noire ou blanche de grade architectural.

### CERTIFIÉ:

c-CSA-us

## REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING
ARENA 8200-36 & 8200-54
MAXIMUM DC LOAD 90W

LIGHT SOURCES				
BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
8W DC	8W DC	8W DC	8W DC	11W DC



# ARENA – CONE 8294

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI



BLKE

WHE

## FAMILY FAMILLE



ARENA - BEAM 8290

ARENA - GLOW 8291

ARENA - AIM 8292


ARENA - BALL 8295



ARENA - CONE 8294

ARENA - SLICE SQ 8296

ARENA - ACOUSTIC 8298

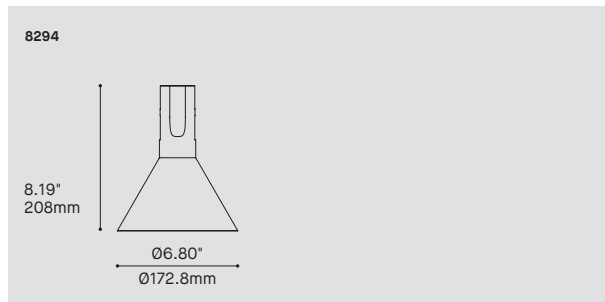

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		8294
8294*	ARENA – CONE * ARENA – CONE IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200, 8210 OR 8220 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT, 11W	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80 CRI	
BEAM ANGLE ANGLE DE FAISCEAU		WI
WI	WIDE (30°)	
FINISH FINI		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	


## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** CONE is a sleek projector with a simple and geometric look. Placed separately or clustered, this accessory allows adding specific points of light to create a unique presence and visual statement.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. Can be flipped vertically on the frame to enable direct or indirect illumination.
- LIGHT SOURCE:** COB LED with a 30° beam angle.
- PROJECTOR:** Custom designed aluminum heatsink and spun aluminum shade offered in white or black architectural grade powder coated finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** CONE est un projecteur élégant au style simple et géométrique. Placé séparément ou en groupe, cet accessoire permet d'ajouter des points de lumières spécifiques et de créer une présence unique.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur place. Peut offrir un éclairage direct ou indirect en étant orienté vers le bas ou vers le haut.
- SOURCE LUMINEUSE:** DEL de type COB avec un angle de projection de 30°.
- PROJECTEUR:** Dissipateur thermique et abat-jour en aluminium conçus sur mesure et offerts avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

# ARENA – BALL 8295

PROJECT PROJET
SPEC TYPE
NOTES

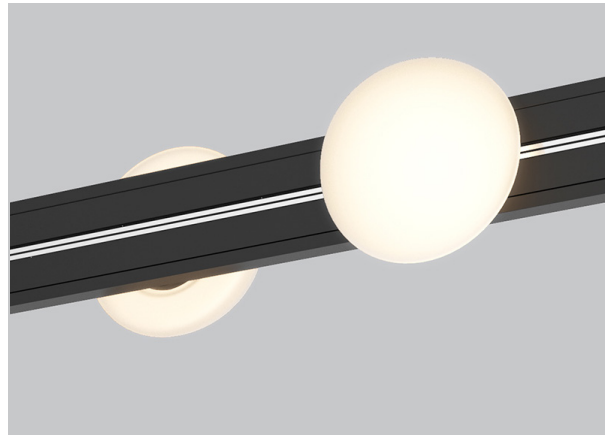

## FAMILY FAMILLE

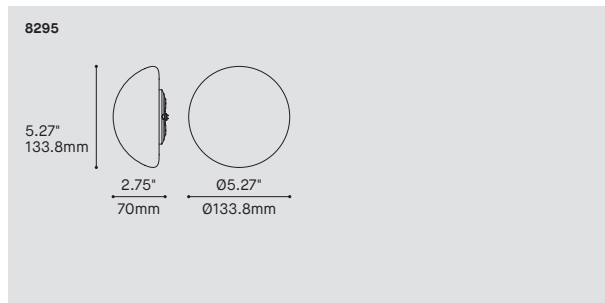

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
<b>MODEL MODÈLE</b>	8295*	8295
* ARENA – BALL IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200, 8210 OR 8220 (SOLD SEPARATELY)		
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	LED	LED
REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W.		
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		80
80	80 CRI	
<b>HEATSINK FINISH FINI DU MODULE</b>		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		WH
WH	WHITE	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** ALL is half a sphere when mounted on one side of the ARENA and can make a full globe effect when installed mirrored to each other on the straight fixture.
- INSTALLATION:** Magnetically positioned instantly anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment.
- LIGHT SOURCE:** COB LED uniformly diffused.
- BASE:** Custom designed machined aluminum heatsink offered in white or black architectural grade powder coated finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** BALL est une demi-sphère lorsqu'elle est montée sur un seul côté du Arena et peut former une sphère presque parfaite lorsque plusieurs sont installées symétriquement sur la version droite du luminaire.
- INSTALLATION:** Positionnée magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur place.
- SOURCE LUMINEUSE:** DEL de type COB avec une diffusion uniforme.
- BASE:** Dissipateur thermique usiné en aluminium conçu sur mesure et offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

# SCOUT 404X FOR ARENA 82X0

PROJECT PROJÉT
SPEC TYPE
NOTES



## ADAPTER FINISH FINI DE L'ADAPTATEUR

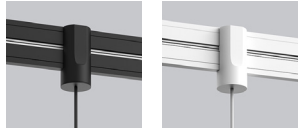


BLKE WHE

## SHADE FINISH FINI ABAT-JOUR



BLKE WHE LGE PGE NBE

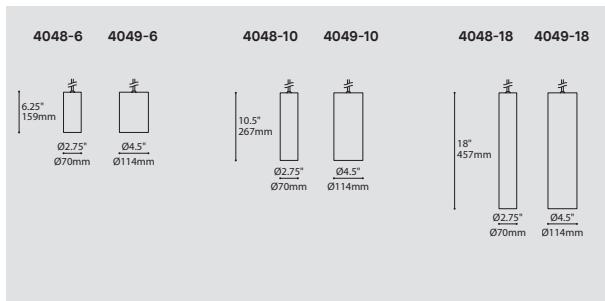

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		
4048-6	SCOUT 6" Ø2.75"	
4048-10	SCOUT 10" Ø2.75"	
4048-18	SCOUT 18" Ø2.75"	
4049-6	SCOUT 6" Ø4.5"	
4049-10	SCOUT 10" Ø4.5"	
4049-18	SCOUT 18" Ø4.5"	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		<b>LEDA</b>
<b>LEDA</b>	SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX</b> INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>BEAM ANGLE</b> ANGLE DE FAISSEAU		
NA	NARROW (24°)	
ME	MEDIUM (45°)	
<b>OPTICAL ACCESSORIES</b> ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
<b>CABLE</b> CÂBLE		<b>C</b>
C	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH</b> LONGUEUR DE CÂBLE		
24	24" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
<b>MOUNTING</b> MONTAGE		
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
TAB	ARENA ADAPTOR FOR ARENA RING 8200	
<b>ADAPTER FINISH</b> FINI ADAPTATEUR		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
<b>POWER CORD FINISH</b> FINI ADAPTATEUR		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
<b>CYLINDER FINISH</b> FINI CYLINDRE		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
LGE	LIGHT GREY FINE TEXTURED	
PGE	PALE GREEN FINE TEXTURED	
NBE	NAVY BLUE FINE TEXTURED	
RAL*	PLEASE SPECIFY RAL CODE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>BAFFLE FINISH</b> FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** Scout is the simplest of cylinders. The exterior is clean with no visible seams or hardware. Inside, a wealth of technology remains hidden. Machined aluminum tube offered with textured finish. Scout can be specified with 2 baffle finishes.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety.
- LIGHT SOURCE:** High performance LED module mounted on an extruded aluminum heatsink. Designed with narrow or medium beam angle, to meet all applications. Optical choice of clear, frosted or honeycomb lenses available.
- ADAPTER:** Custom designed aluminum base offered in white or black architectural grade finish.
- CERTIFIED:** c-CSA-us

# MIKA 4230-8 FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES



## ADAPTER FINISH FINI DE L'ADAPTEUR



BLKE WHE


## FAMILY FAMILLE



ARENA - BEAM 8290 ARENA - GLOW 8291 ARENA - AIM 8292 ARENA - BALL 8295



ARENA - CONE 8294 ARENA - SLICE SQ 8296 ARENA - ACOUSTIC 8298

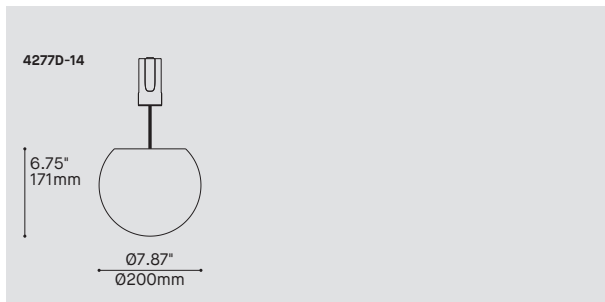

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4230-8 MIKA 8"	4230-8
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	LEDA*	LEDA
* SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION		
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)</b>		
80	80+ CRI	
90*	90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>CABLE CÂBLE</b>		C
C	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>		
24	24" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
<b>MOUNTING MONTAGE</b>		
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
TAB	ARENA ADAPTOR FOR ARENA RING 8200	
<b>ADAPTER FINISH FINI ADAPTEUR</b>		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
<b>POWER CORD FINISH FINI ADAPTEUR</b>		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		WH
WH	WHITE	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** Classic round globe with an evenly frosted shade of 8" diameter. Translucent white diffuser made of impact resistant rotomolded MDPE.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety.
- LIGHT SOURCE:** High performance LED module mounted on an extruded aluminum heatsink.
- ADAPTER:** Custom designed aluminum base offered in white or black architectural grade finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Globe rond classique composé d'un diffuseur uniformément givré de 8" de diamètres. Diffuseur blanc translucide en MDPE rotomoulé résistant aux chocs.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.
- SOURCE LUMINEUSE:** Module DEL à haute intensité monté sur un radiateur en aluminium extrudé.
- ADAPTEUR:** Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

# CELESTE 4010-CEL FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES




## ADAPTER FINISH FINI DE L'ADAPTEUR

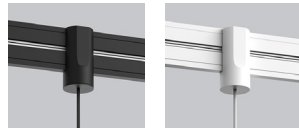

BLKE


WHE

## GLASS FINISH FINI VERRE

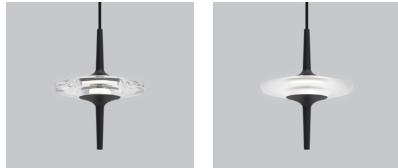

CLR

FRO

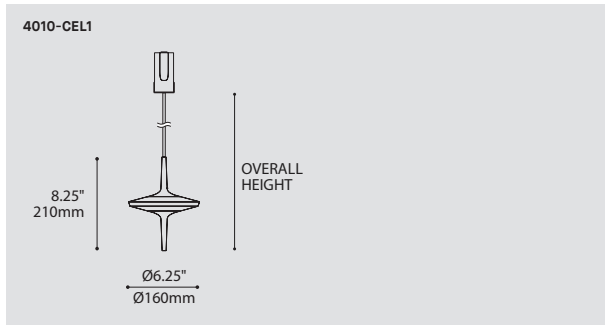

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
<b>MODEL MODÈLE</b>		<b>4010-CEL</b>
<b>4010-CEL</b>	DROPLET CELESTE FOR ARENA	
<b>CONFIGURATION CONFIGURATION</b>		<b>1</b>
<b>1</b>	SINGLE UNIT 1 HEAD	MIN. HEIGHT 16"
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		<b>LEDA</b>
<b>LEDA</b>	SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
<b>27*</b>	2700K	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>90</b>
<b>90</b>	90+ CRI	
<b>OVERALL HEIGHT HAUTEUR HORS TOUT</b>		
<b>24</b>	24" CABLE (STD LENGTH)	
<b>**</b>	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
<b>MOUNTING MONTAGE</b>		
<b>TAA</b>	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
<b>TAB</b>	ARENA ADAPTOR FOR ARENA RING 8200	
<b>ADAPTER FINISH FINI ADAPTEUR</b>		<b>BLKE</b>
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>HEAD FINISH FINI TÊTE</b>		<b>BLKE</b>
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>GLASS FINISH FINI VERRE</b>		
<b>CLR</b>	CLEAR GLASS	
<b>FRO</b>	FROSTED GLASS	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** Celeste is a clean minimalist pendant featuring an elegant artisanal casted glass disc. Vertical stems passing through the light fixture create a visual continuity with the cable, accentuated by the glowing glass disc to create a striking effect. Die casted aluminum caps with machined stems. Casted glass diffuser is offered in either clear or frost finish, structure coated in an architectural grade finely textured black paint.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. Cable length is not field adjustable and must be specified to desired length.
- LIGHT SOURCE:** LED strip wrapped around a cylindrical heatsink. The light is blended through an internal diffuser, before shining through the thick glass disc.
- ADAPATER:** Custom designed aluminum base offered in white or black architectural grade finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Celeste est un luminaire suspendu minimaliste doté d'un élégant disque en verre coulé artisanal. Les tiges verticales traversant le luminaire créent une continuité visuelle avec le câble, accentuée par un disque de verre brillant pour créer un effet saisissant. Embouts en aluminium moulé sous pression avec tiges usinées. Diffuseur en verre coulé offert en finis clair ou givré, structure revêtue d'une peinture noire finement texturée de qualité architecturale.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité. La longueur du câble n'est pas ajustable sur le terrain et doit être spécifiée à la longueur souhaitée.
- SOURCE LUMINEUSE:** Bande LED enroulée sur un dissipateur thermique cylindrique. La lumière est mélangée à travers un diffuseur interne, avant de briller à travers le disque en verre massif.
- ADAPTEUR:** Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

# BLOOM 4269-XX FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES



## ADAPTER FINISH FINI DE L'ADAPTATEUR



BLKE WHE

## SHADE FINISH 10" FINI ABAT-JOUR 10"




BLKE WHE LGE PGE NBE

## SHADE FINISH 15" FINI ABAT-JOUR 15"



BLKE WHE LGE PGE NBE

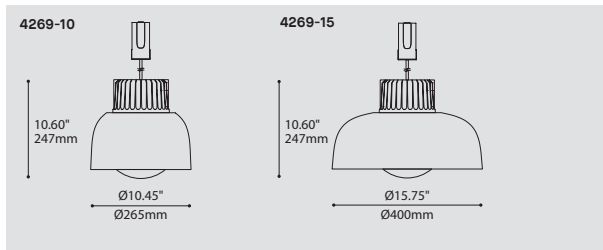

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

4269-10 BLOOM 10"  
4269-15 BLOOM 15"

### LIGHT SOURCE SOURCE LUMINEUSE

LEDA

LEDA SPECIAL OUTPUT FOR ARENA, 8W  
\* TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27\* 2700K  
30 3000K  
35 3500K  
40 4000K

\*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI  
90\* 90+ CRI

\*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### CABLE CÂBLE

C

C BLACK CABLE, FIELD ADJUSTABLE

### CABLE LENGTH LONGUEUR DE CÂBLE

24 24" CABLE (STD LENGTH)  
\*\* CUSTOM CABLE LENGTH (PLEASE SPECIFY)

### MOUNTING MONTAGE

TAA ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210  
TAB ARENA ADAPTOR FOR ARENA RING 8200

### ADAPTER FINISH FINI ADAPTATEUR

BLKE BLACK FINE TEXTURED  
WHE WHITE FINE TEXTURED

### POWER CORD FINISH FINI ADAPTATEUR

BLK BLACK POWER CORD  
WH WHITE POWER CORD

### SHADE FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURED  
WHE WHITE FINE TEXTURED  
LGE LIGHT GREY FINE TEXTURED  
PGE PALE GREEN FINE TEXTURED  
NBE NAVY BLUE FINE TEXTURED  
RAL\* PLEASE SPECIFY RAL CODE

\*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



### DESIGN:

Bloom is a light fixture with a soft and inviting shape. Under the colorful shade hides a luminous globe offering a generous amount of soft light. Bloom is available in two sizes and a variety of different finishes. High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.

### INSTALLATION:

Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety.

### LIGHT SOURCE:

A central powerful COB type light source project a powerful light, softened by the spherical polymer diffuser to create a light that is efficient, yet soft to the eye.

### ADAPATER:

Custom designed aluminum base offered in white or black architectural grade finish. c-CSA-us

### CERTIFIED:

### CONCEPTION:

Bloom est un luminaire à la forme charmante et invitante. Sous l'abat-jour coloré, un globe lumineux offre une quantité généreuse de douce lumière. Bloom est offert en deux tailles et en une variété de finis. Radiateur haute performance en aluminium moulé sous pression, fini noir texturé. Réflecteurs en aluminium tourné, offert en une large variété de finis externes avec un fini interne blanc pour une réflexion lumineuse optimale.

### INSTALLATION:

Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.

### SOURCE LUMINEUSE:

Un projecteur central de type COB projette une puissante lumière, adoucie par un diffuseur sphérique en polymère, afin de créer une lumière efficace, mais plaisante pour l'œil.

### ADAPTATEUR:

Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.

### CERTIFIÉ:


c-CSA-us

# MILL 4277D-14 FOR ARENA 82X0

PROJECT PROJÉT
SPEC TYPE
NOTES



## ADAPTER FINISH FINI DE L'ADAPTATEUR




BLKE WHE

## SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

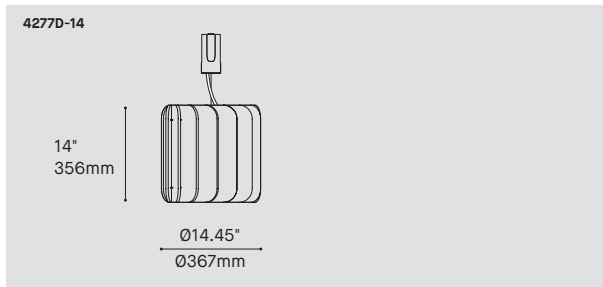

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE	4277D-14 MILL DIRECT 14"	4277D-14
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE	LEDA*	
<b>LEDA*</b>	SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR	27* 2700K 30 3000K 35 3500K 40 4000K  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX</b> INDICE DE RENDU DE COULEUR (IRC)	80 80+ CRI 90* 90+ CRI  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>CABLE</b> CÂBLE	AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC
<b>CABLE LENGTH</b> LONGUEUR DE CÂBLE	24 24" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
<b>MOUNTING</b> MONTAGE	TAA ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210 TAB ARENA ADAPTOR FOR ARENA RING 8200	
<b>ADAPTER FINISH</b> FINI ADAPTATEUR	BLKE BLACK FINE TEXTURED WHE WHITE FINE TEXTURED	
<b>POWER CORD FINISH</b> FINI ADAPTATEUR	BLK BLACK POWER CORD WH WHITE POWER CORD	
<b>SHADE FINISH</b> FINI ABAT-JOUR	ABF AZURE BLUE FELT    BYF BANANA YELLOW FELT    REF RED FELT AWF ARCTIC WHITE FELT    CHF CHARCOAL FELT    SGF SILVER GRAY FELT BBF BASIC BLACK FELT    NBF NAVY BLUE FELT    TGF TITANIUM GRAY FELT BOF BLOOD ORANGE FELT    OBF OCEAN BLUE FELT    ZFF ZINFANDEL FELT BTF BATTLESHIP GRAY FELT    PGF PEAR GREEN FELT <b>PREMIUM*</b> PLEASE SPECIFY PREMIUM COLOR CODE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>DIFFUSER FINISH</b> FINI DIFFUSEUR	WH WHITE	WH

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** With its fifteen acoustic panels shade, Mill offers an original soft aesthetic and atmosphere enhancing functionality. Mill will help with volume control while adding a stunning design element to the decor. The custom CNC cut rigid felt acoustic panels are available in 30 colors. Composed of at least 40% of recycled polyethylene bottles (PET) which make them recyclable and odorless.

**INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. This pendant offers evenly diffused lighting with a COB light source.

**LIGHT SOURCE:** Custom designed aluminum base offered in white or black architectural grade finish.

**ADAPATER:** c-CSA-us

**CERTIFIED:**

**CONCEPTION:** Avec son abat-jour de quinze panneaux acoustiques, Mill offre une esthétique et une atmosphère douce améliorant sa fonctionnalité. Mill vous aidera à contrôler le volume sonore de l'espace tout en ajoutant un élément de design époustouffant au décor. Découpés sur mesure, les panneaux acoustiques en feutre synthétique rigide sont disponibles en 30 couleurs. Composés principalement d'au moins 40% de bouteilles de polyéthylène recyclées (PET), ces panneaux sont recyclables et inodores.

**INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.

**SOURCE LUMINEUSE:** Pourvu d'une source lumineuse de type COB, ce luminaire offre un éclairage uniforme.

**ADAPTATEUR:** Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.

**CERTIFIÉ:** c-CSA-us




# MUTE 4258-16 FOR ARENA 82X0

PROJECT PROJÉT
SPEC TYPE
NOTES



## ADAPTER FINISH FINI DE L'ADAPTATEUR

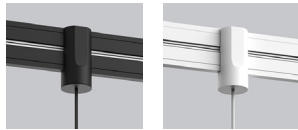


BLKE

WHE

## SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

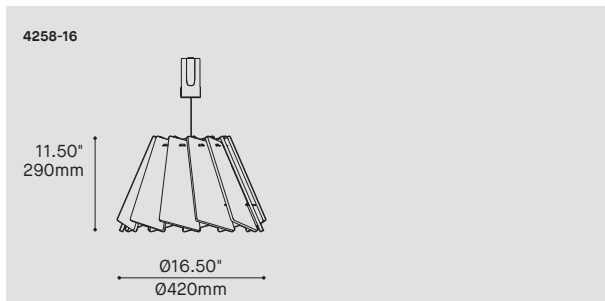

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4258-16 MUTE 16"	4258-16
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	<b>LEDA</b> SPECIAL OUTPUT FOR ARENA, 11W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	<b>LEDA</b>
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	27* 2700K 30 3000K 35 3500K 40 4000K  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)</b>	80 80+ CRI 90* 90+ CRI  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>	24 24" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
<b>MOUNTING MONTAGE</b>	<b>TAA</b> ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210 <b>TAB</b> ARENA ADAPTOR FOR ARENA RING 8200	
<b>ADAPTER FINISH FINI ADAPTATEUR</b>	<b>BLKE</b> BLACK FINE TEXTURED <b>WHE</b> WHITE FINE TEXTURED	
<b>POWER CORD FINISH FINI ADAPTATEUR</b>	<b>BLK</b> BLACK POWER CORD <b>WH</b> WHITE POWER CORD	
<b>SHADE FINISH FINI ABAT-JOUR</b>	<b>ABF</b> AZURE BLUE FELT <b>BYF</b> BANANA YELLOW FELT <b>REF</b> RED FELT <b>AWF</b> ARCTIC WHITE FELT <b>CHF</b> CHARCOAL FELT <b>SGF</b> SILVER GRAY FELT <b>BBF</b> BASIC BLACK FELT <b>NBF</b> NAVY BLUE FELT <b>TGF</b> TITANIUM GRAY FELT <b>BOF</b> BLOOD ORANGE FELT <b>OBF</b> OCEAN BLUE FELT <b>ZFF</b> ZINFANDEL FELT <b>BTF</b> BATTLESHIP GRAY FELT <b>PGF</b> PEAR GREEN FELT <b>PREMIUM*</b> PLEASE SPECIFY PREMIUM COLOR CODE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE  *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>	<b>WH</b> WHITE	<b>WH</b>

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** Mute is a soft, colorful and sound absorbing downlight pendant composed of twelve felt acoustic panels surrounding a custom LED light source. Precision cut chrome top cover plate. The custom CNC cut felt panels are made from recycled PET bottles and are recyclable. Available in 30 colors.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. Clip-on acoustic panels.
- LIGHT SOURCE:** Custom LED light source distributing a uniform and direct light.
- ADAPTER:** Custom designed aluminum base offered in white or black architectural grade finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Ce luminaire chaleureux et coloré est composé de douze panneaux acoustiques feutrés encerclant une source DEL. Plaque chromée découpée avec précision
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité. Panneaux acoustiques se fixant rapidement et sans outils autour du noyau central.
- SOURCE LUMINEUSE:** Mute est composée d'un module lumineux DEL fait sur mesure.
- ADAPTATEUR:** Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us