



HEX AREA 4721

PROJECT PROJCT
SPEC TYPE
NOTES

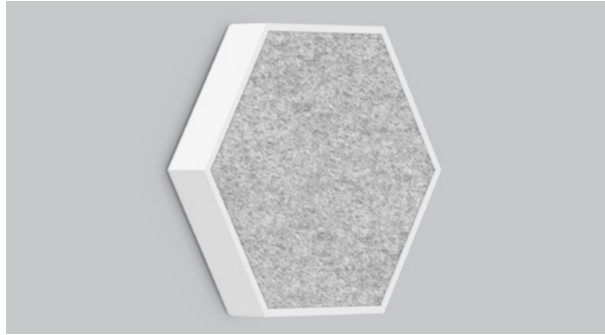

FINISH FINI

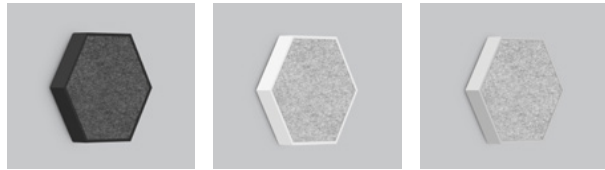

BLKE-CHF

WHE-SGF

LGE-SGF

FELT FINISH FINI FEUTRE



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

FAMILY FAMILLE



4721 (CEILING SURFACE)

4820


4720 (WALL SURFACE)



4715 (CEILING SURFACE)

4815X

4716 (WALL SURFACE)

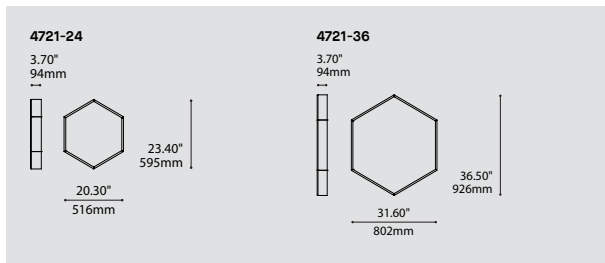

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4721-24 HEX AREA 24" – ACOUSTIC (NO LIGHT SOURCE)
 4721-36 HEX AREA 36" – ACOUSTIC (NO LIGHT SOURCE)

SYSTEM INSTALLATION INSTALLATION SYSTÈME

ST ASSEMBLY TO FACILITATE CLUSTER INSTALLATION
 *IF NO OPTION IS SELECTED, THE STANDARD ASSEMBLY WILL BE PROVIDED.

HOUSING FINISH FINI BOITIER

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE
 LGE LIGHT GREY FINE TEXTURE
 RAL* PLEASE SPECIFY RAL CODE
 *LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

FELT FINISH FINI FEUTRE

ABF AZURE BLUE FELT	BYF BANANA YELLOW FELT	REF RED FELT
AWF ARCTIC WHITE FELT	CHF CHARCOAL FELT	SGF SILVER GRAY FELT
BBF BASIC BLACK FELT	NBF NAVY BLUE FELT	TGF TITANIUM GRAY FELT
BOF BLOOD ORANGE FELT	OBF OCEAN BLUE FELT	ZFF ZINFANDEL FELT
BTF BATTLESHIP GRAY FELT	PGF PEAR GREEN FELT	
PREMIUM* PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE		
*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Large format, sound absorbing hexagonal surface mounted fixtures in Ø24" and Ø36". This fixture has no light source.

HOUSING: Aluminium extrusion frame and die-formed steel backplate with polyester powder finish.

ACOUSTIC: High density 9mm polyester felt with acoustical properties of 0.75 NRC (material only).

CERTIFIED: c-CSA-us

CONCEPTION: Luminaire acoustique hexagonal, disponible en grands formats de Ø24" et Ø36". Version surface. Ce produit n'a aucune source de lumière.

BOITIER: Cadre d'aluminium extrudé et plaque d'acier découpé puis plié, avec peinture électrostatique à base de polyester.

ACOUSTIQUE: Feutre de polyester haute densité de 9mm, avec propriétés acoustiques de 0.75 NRC (matériel seulement).

CERTIFIÉ: c-CSA-us

Acoustic Material Color Options for Hex Area




Standard colors



ABF
Azure Blue




AWF
Arctic White



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




BYF
Banana Yellow




CHF
Charcoal



NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel

Premium colors




BGF
Bubble Gum



BKF
Bark Brown



DBF
Denim Blue



DTF
Deep Teal Green




DYF
Daisy Yellow




GGF
Grass Green




LBF
Light Beige



LGF
Lime Green



MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



SBF
Sky Blue




TOF
Tangerine Orange



TPF
Tulip Purple

- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.

HEX AREA ACOUSTIC 4721

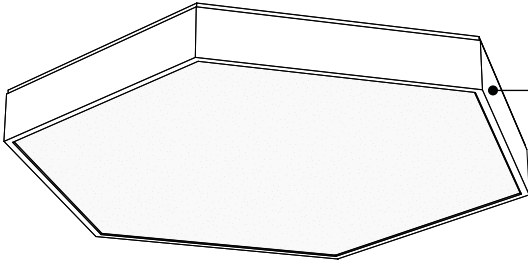

SIMPLE AND CLEAN HOUSING
Precision welded aluminium extrusion.
Clean geometry on the outside,
structural details on the inside

CLEANING
A proper and regular cleaning will help extend the lifespan of acoustic products. Remove dust with a vacuum cleaner and light stains with a damp cloth. For greasy and deep stains, a professional dry clean is recommended. Do not use any abrasive, soap, or chemical cleaner.

SHADOW LINE
Built-in shadow line for a clean install,
compensates for uneven ceiling surfaces

FELT
High density polyester felt panels
made from recycled bottles (PET)
The panels are recyclable



COLORS
Available in 14 standard
colors and 16 Premium colors,
For all color options, refer to the
Acoustic Material Color Options page.




4721-36




NOISE REDUCTION
The center of the product is a large sound
absorbing panel that increase acoustic comfort.




Also available in lighting version.
See product 4720.



ST option for system installation
Permits minimal gaps between fixtures. (2mm)
Uses only set screws instead of a pivot hook & set screws.



4721-24



4721-36

PRODUCT SPECIFICATION	4721-24	4721-36
-----------------------	---------	---------

PERFORMANCE

LIGHT SOURCE - -

OTHER INFORMATION

LUMINAIRE'S WEIGHT	8.5LBS / 3.8KG	22.5LBS / 10.2KG
FELT	HIGH DENSITY 9MM POLYESTER FELT	
ACOUSTIC	ACOUSTIC MATERIAL RATED AT 0.75 NRC	
FIRE RATING	ASTM E84-13 (FELT MATERIAL ONLY)	




Visit our website for warranty terms and conditions.



TECHNICAL DATA

HEX AREA ACOUSTIQUE 4721

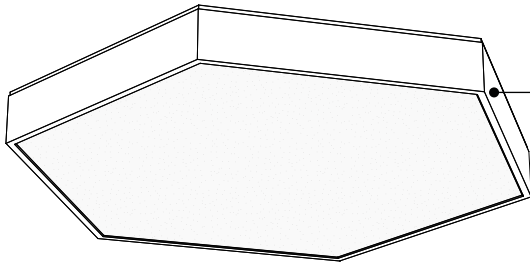

BOÎTIER SOBRE

Extrusion d'aluminium soudée avec précision.
Lignes nettes et modernes à l'extérieur,
détails structuraux cachés à l'intérieur

NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Enlever la poussière avec un aspirateur et les taches légères avec un linge humide. Pour les taches importantes ou grasses, un nettoyage à sec est recommandé. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

JOINT CREUX

Léger retour intégré au boîtier pour une installation propre, compense pour les surfaces de plafond irrégulières


FEUTRE

Panneaux de polyester haute densité faits de bouteilles de plastique recyclées (PET)
Les panneaux sont recyclables




COULEURS

Disponible en 14 couleurs standards et 16 couleurs Premium.
Pour la charte de couleurs consultez la fiche d'options de couleurs



4721-24



4721-36



4721-36




ATTÉNUATION DU BRUIT

Le centre de produit est un grand panneau acoustique qui absorbe le son.



Aussi disponible en version luminaire.
Voir le produit 4720.



Option ST pour installation système

Permet un espace minimal de 2mm entre les luminaires.
Utilise seulement des vis à la place d'un crochet et de vis.

SPÉCIFICATION PRODUIT

4721-24

4721-36

PERFORMANCE

SOURCE LUMINEUSE

-

-

AUTRES INFORMATION

POIDS

8.5LBS / 3.8KG

22.5LBS / 10.2KG

FEUTRE

FEUTRE DE POLYESTER HAUTE DENSITÉ 9MM

ACOUSTIQUE

MATÉRIEL ACOUSTIQUE GRADÉ À 0.75 NRC

RÉSISTANCE AU FEU

ASTM E84-13 (MATÉRIEL FEUTRE SEULEMENT)



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES