

4845-2 LAYERS (TWO LAYERS OF ODEON)

PROJECT PROJÉT

SPEC TYPE

NOTES



4845-2-38-26 SH



4845-2-50-38 SH



4845-2-50-38

FAMILY FAMILLE




4805 (SUSPENDED)



3805 (CEILING SURFACE)



4845-3 (LAYERS)

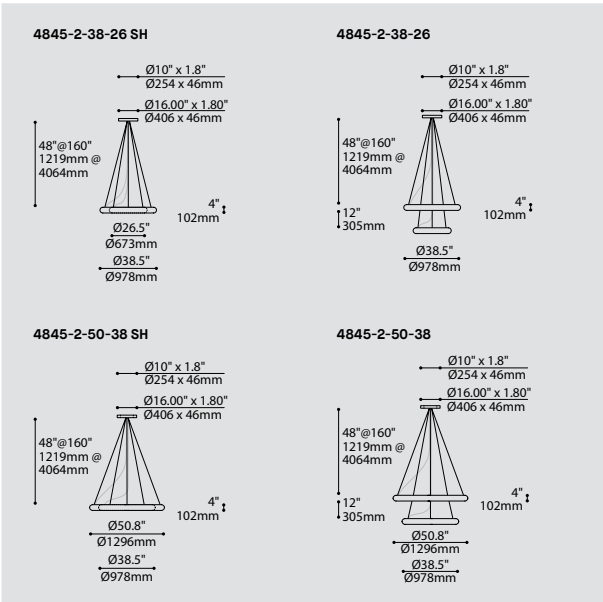

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4845-2
4845-2	ODEON LAYERS – 2 RINGS	
RINGS DIAMETER DIAMÈTRE D'ANNEAUX		
38-26	TOP RING 38" – BOTTOM RING 26"	
50-38	TOP RING 50" – BOTTOM RING 38"	
LIGHT SOURCE SOURCE LUMINEUSE		REG
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX(CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE ^(A)		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH FROM 48" TO 160" (PLEASE SPECIFY)	
(A) ALL DISTANCES BETWEEN RINGS WILL BE 12" EXCEPT IF SAME HEIGHT OPTION IS SELECTED FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
SAME HEIGHT RINGS OPTION OPTION D'ANNEAUX DE MÊME HAUTEUR		
SH	SAME HEIGHT RINGS OPTION / OPTION D'ANNEAUX À LA MÊME HAUTEUR	
MOUNTING OPTION OPTION DE MONTAGE		
RC10	ROUND CANOPY / PAVILLON ROND 10" X 1.8"	
RC16	ROUND CANOPY / PAVILLON ROND 16" X 1.8"	
CANOPY FINISH FINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
CLR	CLEAR POWER CORD	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA	NLIGHT WIRED REMOTE POWER PACK	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	The bright glow of diffused direct/indirect illumination of the Odeon made available in pre-configured layered chandeliers suspended from a single mounting point.
INSTALLATION:	Easy to install, plug and play system: fixtures mount and adjust one by one and are then easily connected to the central canopy with quick connectors.
LIGHT SOURCE:	Custom designed curved LED light engine provides even illumination over the entire surface. Available 0-10V dimming.
DIFFUSER:	Formed from extremely durable and recyclable rotomolded LLDPE.
CONCEPTION:	L'éclairage direct/indirect diffusé de l'Odeon rendu disponible dans des configurations pré-établies de chandeliers étagés suspendus sur un pavillon central.
INSTALLATION:	Facile à installer & connecter : les luminaires se montent et s'ajustent un par un et sont ensuite connectés au pavillon centrale à l'aide de connecteurs rapides.
SOURCE LUMINEUSE:	Module DEL courbé conçu et fabriqué sur mesure, offrant une illumination uniforme sur la totalité de la surface. Offerte en gradation de type 0-10V.
DIFFUSEUR:	Fait de LLDPE rotomoulé très durable et recyclable.

4845-3 LAYERS (THREE LAYERS OF ODEON)

PROJECT PROJCT

SPEC TYPE

NOTES



4845-3-26-38-26

4845-3-38-38-38

4845-3-38-50-38


FAMILY FAMILLE



4805 (SUSPENDED)

3805 (CEILING SURFACE)

4845-2 (LAYERS)

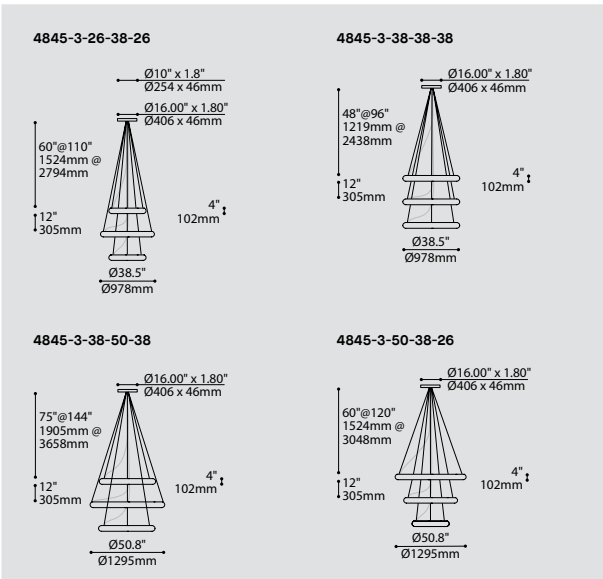

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4845-3
4845-3	ODEON LAYERS – 3 RINGS	
RINGS DIAMETER DIAMÈTRE D'ANNEAUX		
26-38-26	TOP RING 26" – MIDDLE RING 38" – BOTTOM RING 26"	
38-38-38	TOP RING 38" – MIDDLE RING 38" – BOTTOM RING 38"	
50-38-26	TOP RING 50" – MIDDLE RING 38" – BOTTOM RING 26"	
38-50-38	TOP RING 38" – MIDDLE RING 50" – BOTTOM RING 38"	
LIGHT SOURCE SOURCE LUMINEUSE		REG
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX(CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE (A)		
60	60" AIRCRAFT CABLE (STD LENGTH)	
FOR RINGS DIAMETER 26-38-26		
**	CUSTOM AIRCRAFT CABLE LENGTH FROM 60" TO 110" (PLEASE SPECIFY)	
FOR RINGS DIAMETER 38-38-38		
**	CUSTOM AIRCRAFT CABLE LENGTH FROM 48" TO 96" (PLEASE SPECIFY)	
FOR RINGS DIAMETER 38-50-38		
**	CUSTOM AIRCRAFT CABLE LENGTH FROM 75" TO 144" (PLEASE SPECIFY)	
FOR RINGS DIAMETER 50-38-26		
**	CUSTOM AIRCRAFT CABLE LENGTH FROM 60" TO 120" (PLEASE SPECIFY)	
(A) ALL DISTANCES BETWEEN RINGS WILL BE 12"		
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING OPTION OPTION DE MONTAGE		
RC10	ROUND CANOPY / PAVILLON ROND 10" X 1.8" OPTION FOR 26-38-26 ONLY	
RC16	ROUND CANOPY / PAVILLON ROND 16" X 1.8" OPTION FOR ALL	
CANOPY FINISH FINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
CLR	CLEAR POWER CORD	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA	NLIGHT WIRED REMOTE POWER PACK	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	The bright glow of diffused direct/indirect illumination of the Odeon made available in pre-configured layered chandeliers suspended from a single mounting point.
INSTALLATION:	Easy to install, plug and play system: fixtures mount and adjust one by one and are then easily connected to the central canopy with quick connectors.
LIGHT SOURCE:	Custom designed curved LED light engine provides even illumination over the entire surface. Available 0-10V dimming.
DIFFUSER:	Formed from extremely durable and recyclable rotomolded LLDPE.


ODEON 4845-X



EASY INSTALLATION
Mounts to standard junction box with added mounting points to reinforce installation





SIMPLE
White painted canopy to house all electrical components for quick assembly





CENTER PIECE
Matte black recessed center hole to hide mounting hardware


CONFIGURATIONS
Several combinations of the 26", 38" & 50" sizes are available with two or three luminaires. Additional custom variations may be possible.




SWIVELABLE GRIPPERS
Integrated in each ring to facilitate leveling at luminaire height

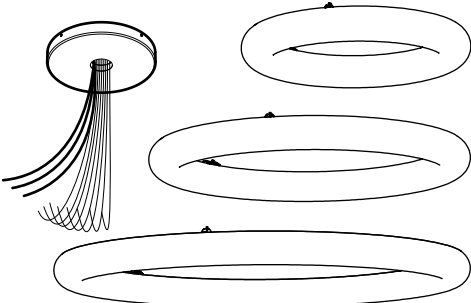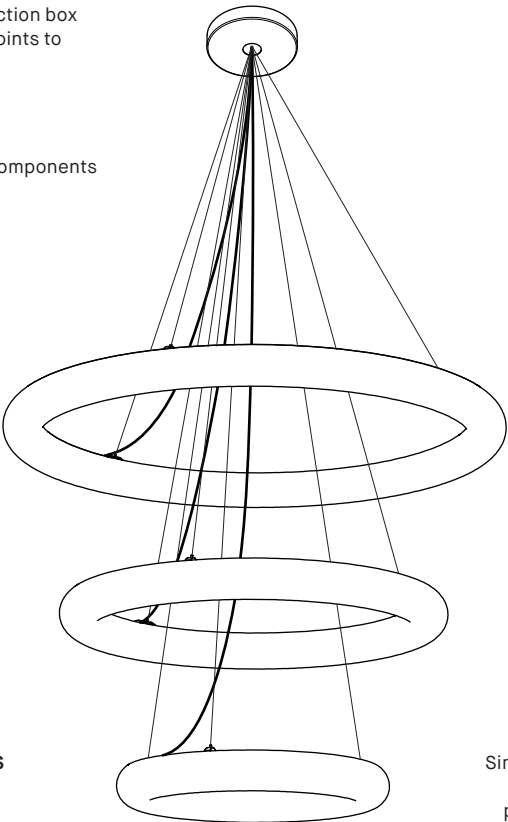


EASY ON-SITE INSTALLATION
Odeons are easily attached to canopy with the help of swivelable grippers and then connected for power with plug & play components



PLUG & PLAY
Simple and fast power feed to each ring perfectly concealed afterward



CONFIGURATION OPTIONS:

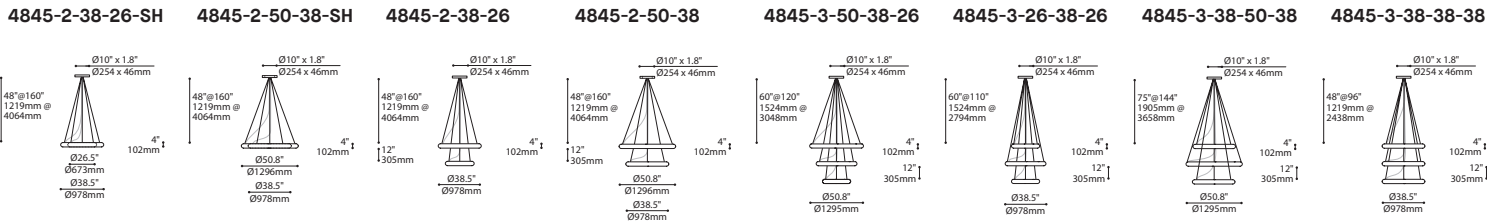


PRODUCT SPECIFICATION		4845-26	4845-38	4845-50
PERFORMANCE		REG	REG	REG
SYSTEM WATTAGE		43 W	62 W	86 W
DELIVERED LUMENS (4000K)		4588 LM	6985 LM	9811 LM
EFFICACY		108 LM/W	113 LM/W	114 LM/W
OTHER INFORMATION				
WEIGHT OF EACH RING		9 LBS / 4.1KG	12 LBS / 5.5 KG	16 LBS / 7.3 KG
L70 (LUMEN MAINTENANCE) LO/REG/HO		> 60 000 HRS	> 60 000 HRS	> 60 000 HRS
LIGHT QUALITY		R9 > 50	R9 > 50	R9 > 50

EFFICACY MULTIPLIERS

CCT	FACTOR 90 CRI
4000K	1.00
3500K	0.97
3000K	0.93
2700K	0.89

LIGHT DISTRIBUTION



4845 - EACH RING




Visit our website for warranty terms and conditions.


ODEON 4845-X



INSTALLATION FACILE
S'installe sur une boîte de jonction standard avec renforcement latéral




SIMPLE
Pavillon blanc avec espace interne nécessaire pour toutes les composantes électriques pour une installation rapide





PIÈCE CENTRALE
Trou encastré avec finition noire matte pour dissimuler l'installation des câbles

CONFIGURATIONS
Plusieurs combinaisons des tailles 26", 38" et 50" sont disponibles avec deux ou trois luminaires de superposées. D'autres variations personnalisées sont possibles.


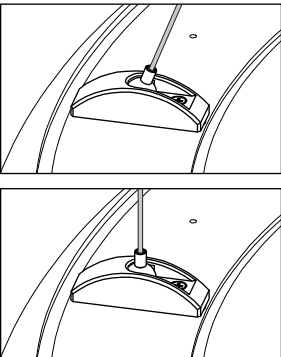


SUPPORTS PIVOTANTS
Intégrés à chaque anneau facilite le nivellement au niveau du luminaire

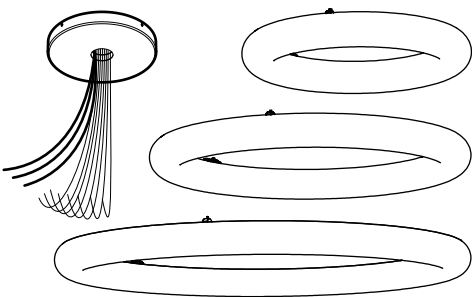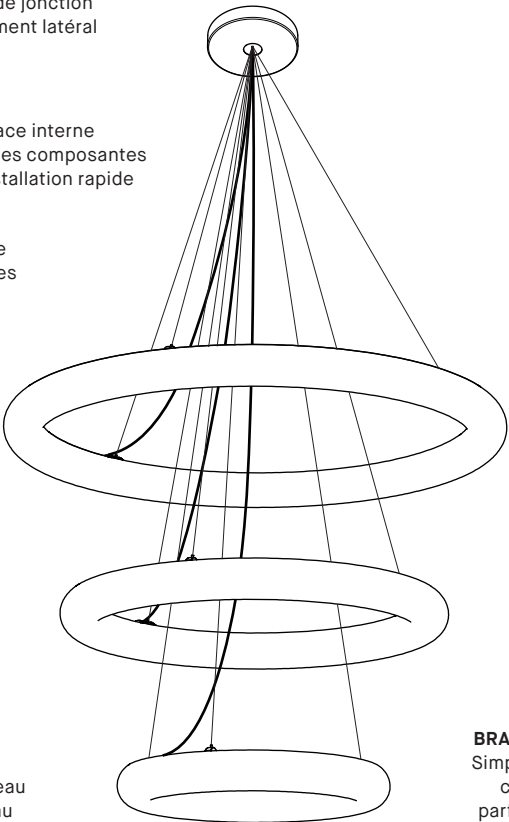


MONTAGE FACILE
Les Odéons sont facilement fixés au pavillon à l'aide de supports pivotants puis raccordés à l'alimentation électrique à l'aide de composants à branchement rapide

BRANCHEMENT RAPIDE
Simple branchement de chacun des anneaux parfaitement dissimulé par la suite



OPTIONS DE CONFIGURATION:

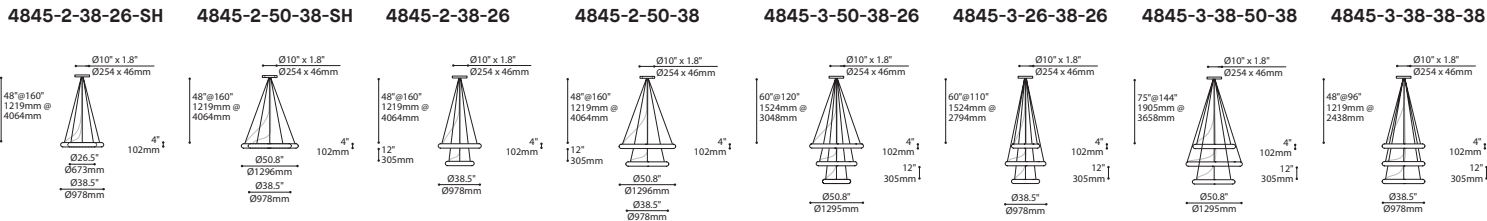


SPÉCIFICATION PRODUIT		4845-26	4845-38	4845-50
PERFORMANCE		REG	REG	REG
PUISSANCE TOTALE		43 W	62 W	86 W
LUMENS RÉELS (4000K)		4588 LM	6985 LM	9811 LM
EFFICACITÉ		108 LM/W	113 LM/W	114 LM/W
AUTRE INFORMATION				
POIDS - CHAQUE ANNEAU		9 LB / 4.1KG	12 LB / 5.5 KG	16 LB / 7.3 KG
L70 (LUMEN MAINTENANCE) LO/REG/HO		> 60 000 H	> 60 000 H	> 60 000 H
QUALITÉ DE LA LUMIÈRE		R9 > 50	R9 > 50	R9 > 50

FACTEUR D'EFFICACITÉ

CCT	FACTEUR 90 IRC
4000K	1.00
3500K	0.97
3000K	0.93
2700K	0.89

DISTRIBUTION LUMINEUSE



4845 - CHAQUE ANNEAU



Visitez notre site Web pour les termes et conditions.