

12540-4X1

PROJECT PROJET
SPEC TYPE
NOTES



FINISH COMBINATIONS COMBINAISONS DE FINIS



BLK-BLK-BLK

WH-BLK-BLK

WH-WH-WH

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		12540-4X1
12540-4X1	BASS 4X1	
HOUSINGS BOÎTIERS		
159X	REMODELING	
169X	NEW CONSTRUCTION	
LIGHT SOURCE SOURCE LUMINEUSE		
MR16.50.E	50W, HAL, MR16, GU5.3 BASE	
MR16LED.16.E	16W MAX., LED, MR16, GU5.3 BASE	
LED.4	4W, LED	
LED.8	8W, LED	
LED.11	11W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
FOR LED ONLY		
90*	90+ CRI	
*MANDATORY FOR LED 4W & 8W		
ANGLE BEAM ANGLE DE FAISCEAU		
FOR LED ONLY		
LED.4 / LED.8		
17	17°	
48	48°	
LED.11		
20	20°	
40	40°	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
*NOT AVAILABLE IN LED 8W WITHOUT DV DRIVER OPTION		
DIMMING OPTION OPTION DE GRADATION		
AVAILABLE WITH LED ONLY		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS OPTIONAL FOR 12540-1X1 4W & 8W AND STANDARD FOR 12540-1X1 11W, 12540-2X1, 12540-3X1 AND 12540-4X1, PLEASE SPECIFY YOUR DIMMING TYPE.		
TRIM FINISH FINI CADRE		
BLK	BLACK	
WH	WHITE	
RING FINISH FINI ANNEAUX		
BLK	BLACK	
WH	WHITE	
ENCLOSURE FINISH FINI BOÎTIER		
BLK	BLACK	
WH	WHITE	
ACCESSORY ACCESSOIRE		
19540-4X1	FLUSH™ MOUNTING ACCESSORY (FOR 12540-4X1)	

159X REMODELING
159X RÉNOVATION

169X NEW CONSTRUCTION
169X NOUVELLE CONSTRUCTION


□ 4.9\"/>

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



The contemporary and functional Bass multiple recessed fixture, features up to four fully directional light sources in both linear and square formats. Available with both standard and high performance Eureka LED modules with optional phase dimming (DP - 120V only) and 0-10V dimming (DV), as well as, MR16 lamp types (LED retrofit or halogen). Dimming is available for all light sources. To maximize design flexibility, the rings and the finish trim of the Bass are available in black or white , while the enclosure is offered in reflective white or discreet black. Using our patented automatically locating mounting clip, Bass is designed for quick installation in both new construction ceilings (169X) or when remodeling (159X) in an existing ceiling. When time is tight the 169X new construction option can be split so that the mounting plate and connection box with quick-connect are shipped in advance of the fixture housing. For a clean look without the hassle of a trim-less installation, the Bass fixture can be installed using our Flush™ mounting accessory (19540).

BASS 12540

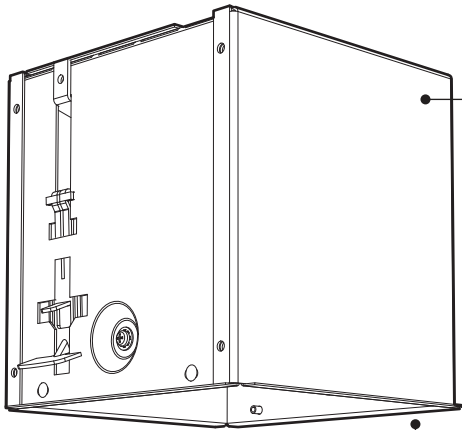

CONTEMPORARY DESIGN
Recessed multiple fixture.
Features 2 fully directional
light sources.


LIGHT SOURCES
HAL: 50W
LED: 4W / 8W / 11W
(Optional dimming available with Led)

MANY POSSIBLE FINISH COMBINATIONS:


ENCLOSURE
Discreet black / Reflective white

RING
Black / White
Independant and fully aimable

TRIM
Black / White
Highly decorative, or can be hidden








REMODELING OPTION
Unique automatically locating mounting
clips for quick installation

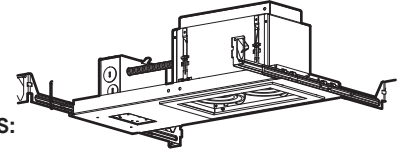

NEW CONSTRUCTION OPTION
Mounting plate available for
split shipping in advance



FLUSH™ MOUNTING ACCESSORY
Quick and clever design for
a trim-less look

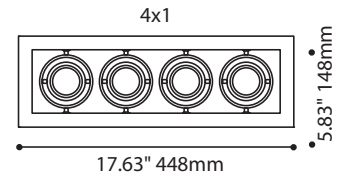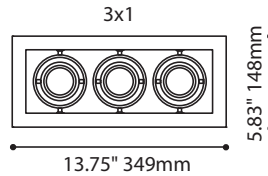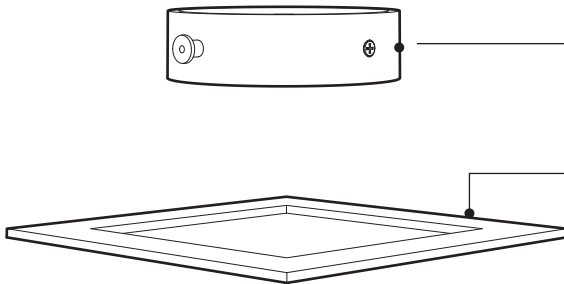

PRODUCT SPECIFICATION

LED 4W

LED 8W

LED 11W

PERFORMANCE

SYSTEM WATTAGE	4W	8W	11W
DELIVERED LUMENS (4000K)	514 LM	947 LM	1629 LM
EFFICACY	100 LM/W	90 LM/W	90 LM/W


OTHER INFORMATIONS

LUMINAIRE'S WEIGHT	12540-1X1: 4.75 LBS / 2.16 KG	12540-2X1: 8.00 LBS / 3.64 KG	12540-3X1: 10.50 LBS / 4.77 KG	12540-4X1: 13.25 LBS / 6.02 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 55 000 HRS	


EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.96
80+	3000K	0.92
80+	2700K	0.91
90+	4000K	0.81
90+	3500K	0.77
90+	3000K	0.74
90+	2700K	0.69


LIGHT DISTRIBUTION



12540-8.48



12540-11.40



12540-11.20




Visit our website for warranty terms and conditions.




TECHNICAL DATA

BASS 12540

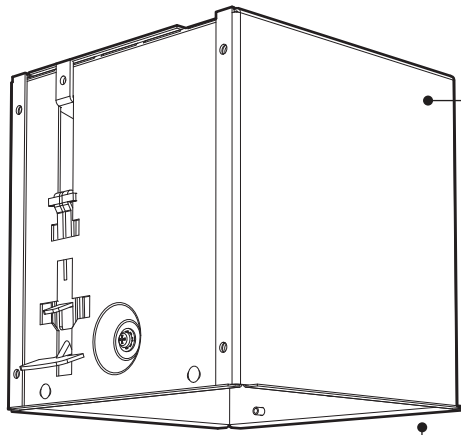

DESIGN CONTEMPORAIN

L'encasté multiple Bass comprend quatre lampes orientables en configuration linéaire ou carrée.




RÉNOVATION

Système breveté exclusif de fixation pour installation rapide

SOURCE LUMINEUSE

HAL: 50W
LED: 4W / 8W / 11W
(DEL offertes avec options de gradation)

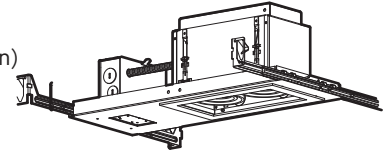

NOUVELLE CONSTRUCTION


La plaque de montage peut être expédié séparément du boîtier, afin d'anticiper l'installation du gypse

PLUSIEURS COMBINAISONS DE FINITION POSSIBLES:

BOITIERS
Noir / Blanc réfléchif






ANNEAUX
Noir discret / Blanc
Indépendants et directionnels

CADRES
Noir / Blanc
Décoratifs ou cachés



L'ACCESSOIRE DE MONTAGE FLUSH™

Conception rapide et intelligent pour un look sans bordure

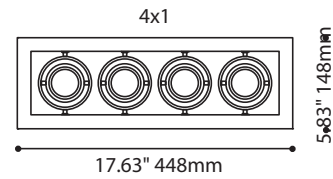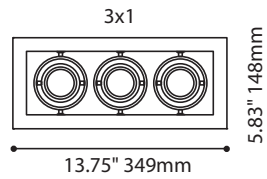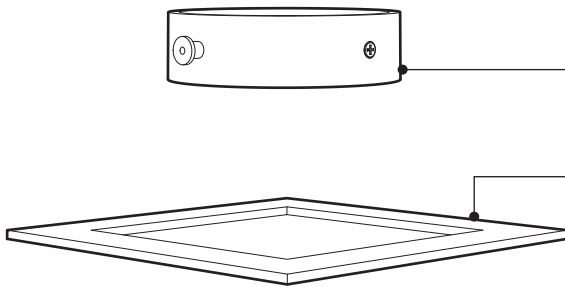

SPÉCIFICATION PRODUIT

LED 4W

LED 8W

LED 11W

PERFORMANCE

PUISSANCE TOTALE	4W	8W	11W
LUMENS RÉELS (4000K)	514 LM	947 LM	1629 LM
EFFICACITÉ	100 LM/W	90 LM/W	90 LM/W


AUTRES INFORMATIONS

POIDS	12540-1X1: 4.75 LBS / 2.16 KG	12540-2X1: 8.00 LBS / 3.64 KG	12540-3X1: 10.50 LBS / 4.77 KG	12540-4X1: 13.25 LBS / 6.02 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 H	> 60 000 H	> 55 000 H	


FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.96
80+	3000K	0.92
80+	2700K	0.91
90+	4000K	0.81
90+	3500K	0.77
90+	3000K	0.74
90+	2700K	0.69


DISTRIBUTION LUMINEUSE



12540-8.48



12540-11.40



12540-11.20



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES