

# ROLO 2039

PROJECT PROJET
SPEC TYPE
NOTES



## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	HAL TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	HAL	LED DIM
MOUNTING	2734	2734E	2401E	2403G
MODEL	2039 4039	2039 4039	2039 4039	2039 4039
CABLE	67.25" 66.85"	66.75" 68.00"	65.25" 66.95"*	65.75" 67.45"*



\* FOR HAL, SUBSTRACT 0.45"

## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734E	2401E	2403G
3.85" x 2.03" 98 x 52mm	6.15" x 2.00" 156 x 51mm	Ø4.50" x 1.00" Ø114 x 25mm	Ø4.50" x 1.50" Ø114 x 38mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS





## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

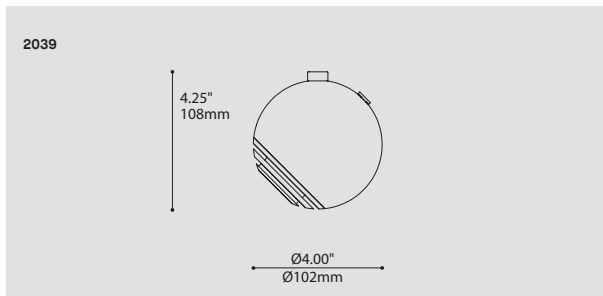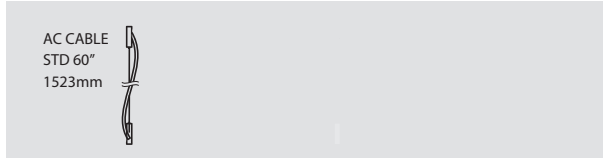

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	<b>2039</b>
<b>2039</b>	ROLO (PROJECTOR HEAD)
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)	
<b>MR16C.50</b>	50W, HAL, MR16C, GU5.3 BASE
<b>LED.4</b>	4W, LED
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	
FOR LED ONLY	
<b>27</b>	2700K
<b>30</b>	3000K
<b>35</b>	3500K
<b>40*</b>	4000K
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>	
<b>90</b>	90+ CRI
	FOR LED ONLY - MANDATORY
<b>ANGLE BEAM ANGLE DE FAISCEAU</b>	
FOR LED ONLY	
<b>17</b>	17°
<b>48</b>	48°
<b>VOLTAGE VOLTAGE</b>	
<b>120V</b>	120 VOLT
<b>277V*</b>	277 VOLT
	*NOT AVAILABLE WITH A TRACK ADAPTOR
<b>DIMMING OPTION OPTION DE GRADATION</b>	
FOR LED ONLY	
<b>DV*</b>	0-10V DIMMING (120-277V)
<b>DP</b>	PHASE DIMMING (120V ONLY)
	*NOT AVAILABLE WITH A TRACK ADAPTOR
	LED DIMMING IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.
<b>STEM TIGE</b>	<b>AC</b>
<b>AC</b>	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE (2039 ONLY)
<b>CABLE LENGTH LONGUEUR DE CABLE</b>	
<b>60</b>	60" AIRCRAFT CABLE (STD LENGTH)
<b>**</b>	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.
<b>MOUNTING MONTAGE</b>	
<b>RC</b>	ROUND CANOPY / PAVILLON ROND FOR HAL: 1.00" CANOPY (2401E) FOR DIMMING LED: 1.75" CANOPY (2403G)
<b>TA1</b>	TRACK ADAPTOR / ADAPTEUR DE RAIL 1 CIRCUIT HAL 120/12V ADAPTOR (2734) LED DIMMING 120V ADAPTOR (2734F)
<b>TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL<sup>(A)</sup></b>	
<b>WH</b>	WHITE
<b>BLK</b>	BLACK
<b>M G</b>	METALLIC GRAY
	<sup>(A)</sup> FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY
<b>STRUCTURE FINISH FINI STRUCTURE</b>	
<b>BLK</b>	BLACK
<b>CHR</b>	CHROME
<b>WH</b>	WHITE
<b>CANOPY FINISH FINI PAVILLON<sup>(B)</sup></b>	
<b>BLK</b>	BLACK
<b>CHR</b>	CHROME
<b>WH</b>	WHITE
	<sup>(B)</sup> IF NO FINISH IS SELECTED, CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH
<b>HEATSINK FINISH FINI RADIATEUR</b>	<b>SAA</b>
<b>SAA</b>	SATIN ALUMINUM ANODIZED

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



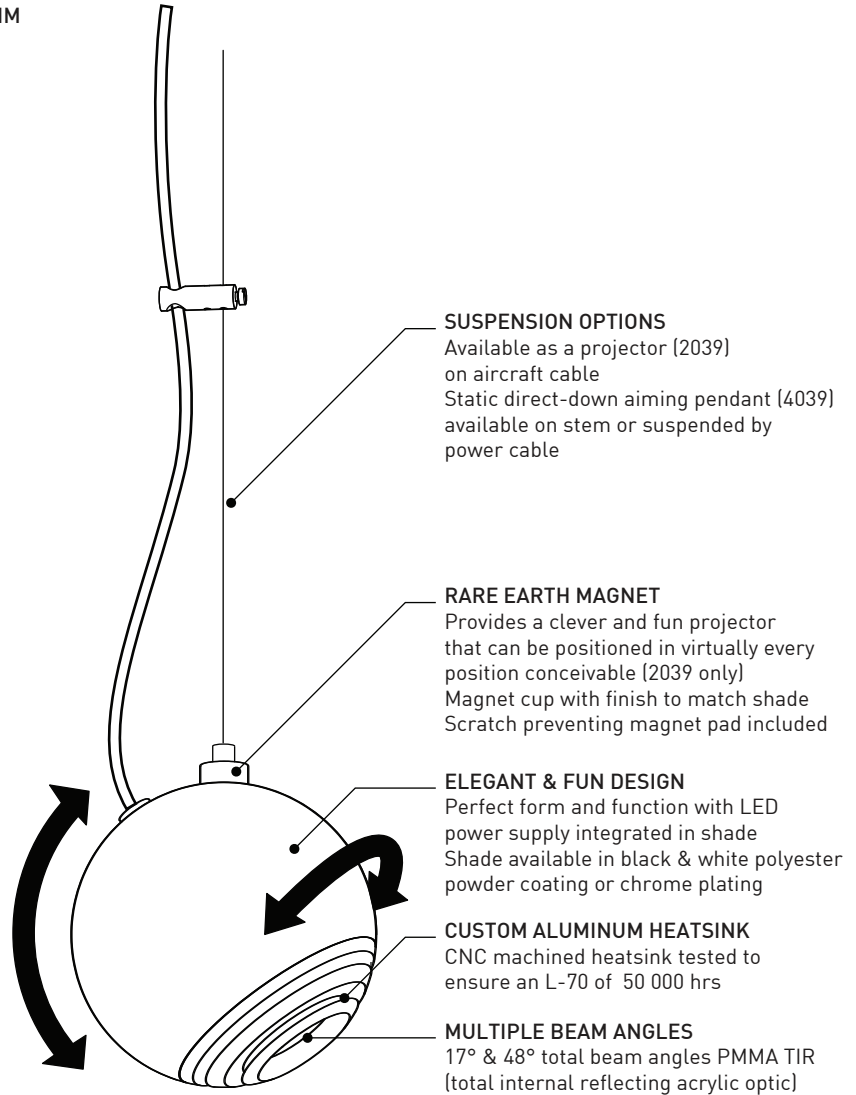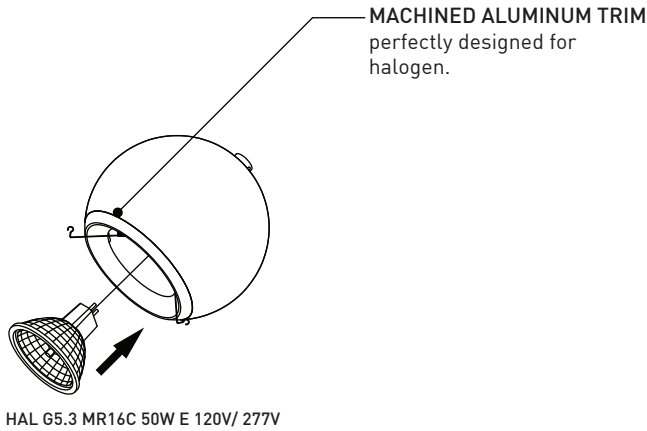

## SPECIFICATIONS


	LED.4.XX.XX	MR16C.50
LIGHT SOURCE	4 x Nichia - total ±4 w	50W MR16 Halogen
MODULE	UL recognized - made in USA	
LUMENS (ESTIMATED)	365 lm - 340 lm (4000K)	
CRI	84 CRI (typical)	
MAGNET / CUP	Machined steel cup and rare-earth magnet (9lbs strength) with 0.010" thk UHMW polyethylene glide pad	
HOUSING	Ø4" Progressive Die-formed steel shade with black or white polyester powder coated finish or chrome plating	
HEATSINK / TRIM	Custom designed clear anodized CNC machined aluminium - L70 estimated 50 000 hrs	
LIGHT DISTRIBUTION	Directional projector (2039) or Direct (4039)	
OPTICS	LEDIL TIR - 17° & 48° total beam angle	
VOLTAGE	120V or 277V (not available in LED or with track adaptor)	
DRIVER / CONVERTER	350 mA	Elect. Transfo.
DIMMING	Phase dimming (DP) or 0-10V dimming (DV)	w/ ELV dimmer
LM-79	On request	
WARRANTY	5 years	2 year




225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com




2039  
4039

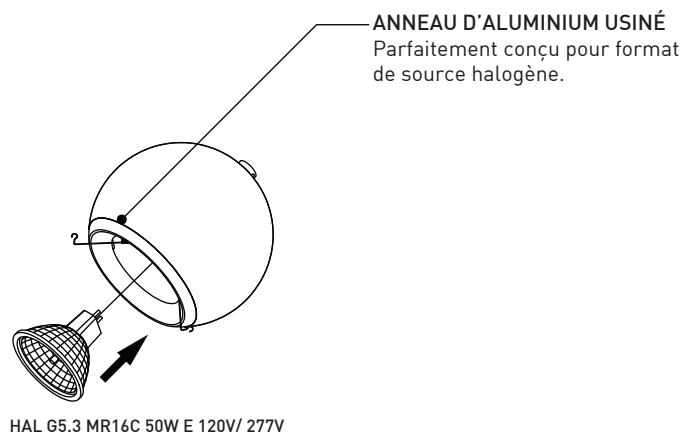


HAL G5.3 MR16C 50W E 120V/ 277V



2039



4039

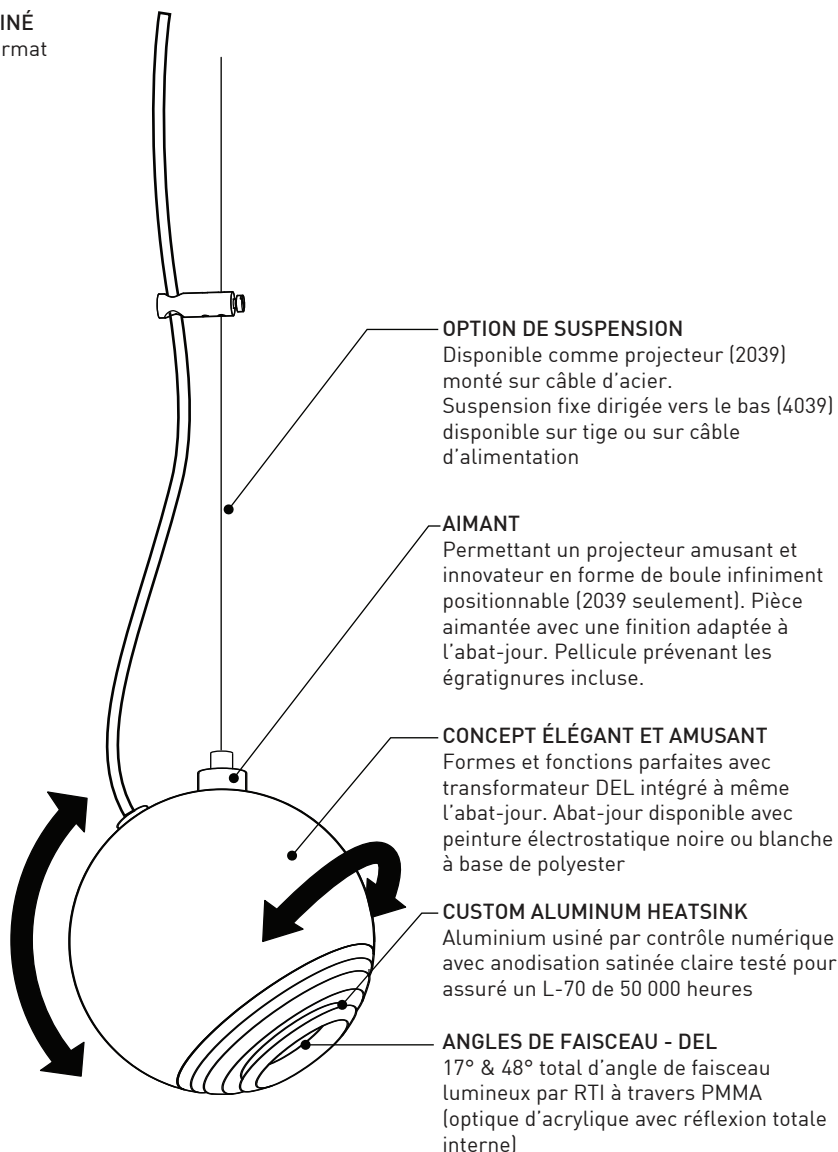

RECOGNIZED WINNER



NGL 2012



## SPÉCIFICATIONS

## SOURCE LUMINEUSE

## MODULE

## LUMENS (ESTIMÉ)

## IRC

## AIMANT

## HOUSING

## RADIATEUR / ANNEAU

## DISTRIBUTION LUMINEUSE

## OPTIQUES

## VOLTAGE

## PILOTE / CONVERTISSEUR

## GRADATION

## LM-79

## GARANTIE

## DEL.4.XX.XX

4 x Nichia - total ±4 w

Reconnu par UL - fabriqué aux États-Unis

365 lm - 340 lm (4000K)

84 IRC (typique)

Embout d'acier usiné et aimant (force de 9 lbs) avec pellicule UHMW polyéthylène de 0.010"

Abat-jour de Ø4" en acier progressivement embouti avec peinture électrostatique noire ou blanche à base de polyester

Concept personnalisé d'aluminium anodisé et usiné par contrôle numérique - L70, 50 000 heures estimées

Projecteur directionnel (2039) ou direct (4039)

LEDIL RTI - angle de faisceau total de 17° &amp; 48°

120V ou 277V (non disponible en version DEL ou avec système de rails)

350 mA

Transfo. Elect.

Gradation phase (DP) ou Gradation 0-10V (DV)

Avec ELV à gradation

Sur demande

5 ans

2 ans

## MR16C.50

50W MR16 Halogène



225 de Liège Ouest, Suite #200  
 Montréal (QC), Canada H2P 1H4  
 Tel : 514.385.3515 Fax : 514.385.4169  
 www.eurekalighting.com



2039  
 4039