

# FOCUS 2047

PROJECT PROJÉT
SPEC TYPE
NOTES



## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED TRACK 1 CIRCUIT	LED*	LED
MOUNTING	2734E	2401C	2403G
STEM	41.30"	39.79"	41.04"

\* FOR LED NON-IC INSTALLATION


## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E	2401C	2403G
6.15" x 2.00"	Ø4.50" x 0.50"	Ø4.50" x 1.75"
156 x 51mm	Ø114 x 13mm	Ø114 x 44mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	
--------------------------	--



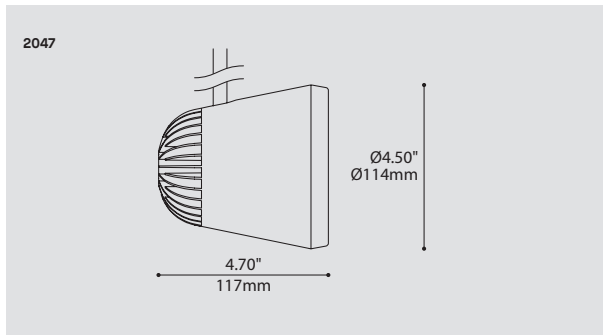


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	FOCUS	2047
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.18	18W, LED	
LED.25	25W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
BEAM ANGLE ANGLE DE FAISCEAU		
15	15°	
38	38°	
55	55°	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
*NOT AVAILABLE WITH A TRACK ADAPTOR		
DIMMING OPTION OPTION DE GRADATION		
DV*	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
*NOT AVAILABLE WITH A TRACK ADAPTOR		
STEM TIGE		
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
-	NO STEM*	
*AVAILABLE WITH A TRACK ADAPTOR ONLY		
STEM LENGTH LONGUEUR DE TIGE		
36	36" STEM (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE		
RC	ROUND CANOPY / PAVILLON ROND	
RC-IC	FOR NON-IC INSTALLATION: 0.50" CANOPY (2401C)* FOR IC INSTALLATION: 1.75" CANOPY (2403G) *3983 ACCESSORY PROVIDED FOR 2401C	
TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT LED DIMMING 120V ADAPTOR (2734E)	
MOUNTING OPTION OPTION DE MONTAGE		
SCA	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL <sup>(A)</sup>		
WH	WHITE	
BLK	BLACK	
<sup>(A)</sup> FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE <sup>(B)</sup>		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
<sup>(B)</sup> INCLUDING CANOPY FINISH IF A CANOPY WAS SELECTED		
SHADE FINISH FINI ABAT-JOUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Focus is simply the most powerful spotlight designed by Eureka! This performance is achievable through the combination of a clever heatsink construction, a high quality LED, a carbon thermal interface and an efficient reflector.
STRUCTURE:	The custom built heatsink was designed with hidden fins and an airflow channel that forces heat to smoothly navigate up to the top fins that are exposed to ambient air. Available with black or white architectural grade fine textured finish.
REFLECTOR:	Aluminum reflector with an impressive efficiency of 90% available with 15°, 38° or 55° beam angle (FWHM).
CERTIFIED:	c-CSA-us, c-UL-us

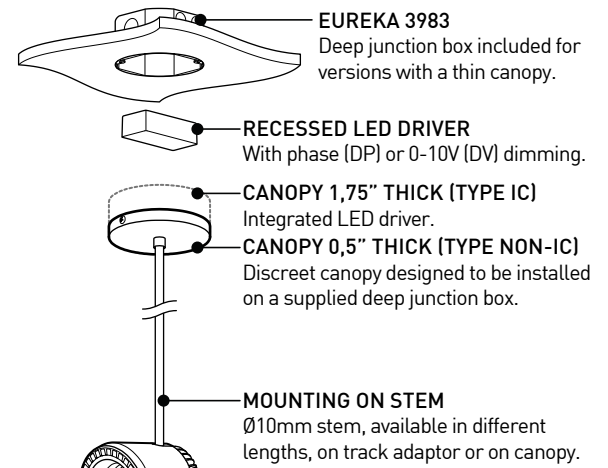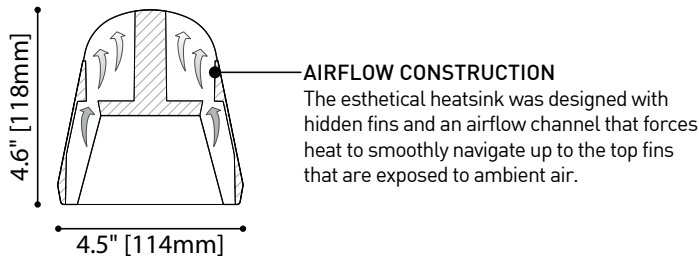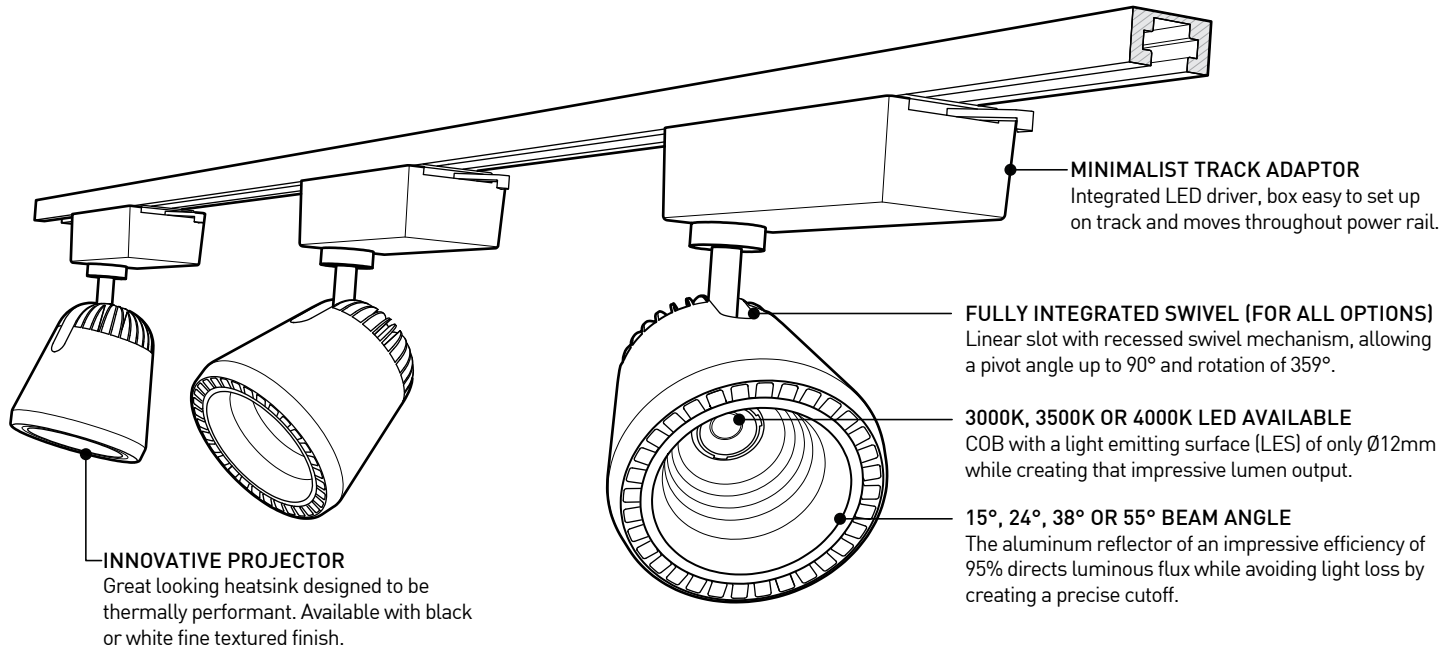

## SPECIFICATIONS

LIGHT SOURCE  
LUMENS (DELIVERED)  
CRI  
CCT  
HEATSINK  
LIGHT DISTRIBUTION  
REFLECTOR  
LED DRIVER  
DIMMING (VOLTAGE)  
LM-79  
WARRANTY

## LED 18W

1 x COB LED - System Wattage 21.3W Total  
2177 lumens (102lm/W)  
83 CRI (typical)  
4000K 3-step MacAdam Ellipse binning  
Custom diecast aluminum, black or white fine textured finish  
Directional projector (2047 and 4547)  
Aluminum, FWHM 15°, 24°, 38° or 55°  
Constant Current 500mA, UL Recognized  
Phase dimming (DP) 120V or 0-10V dimming (DV) 120-277V  
Upon request  
5 years

## LED 25W



1 x COB LED - System Wattage 30.6W Total  
2803 lumens (92lm/W)  
Constant Current 700mA, UL Recognized



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com




2047  
4547

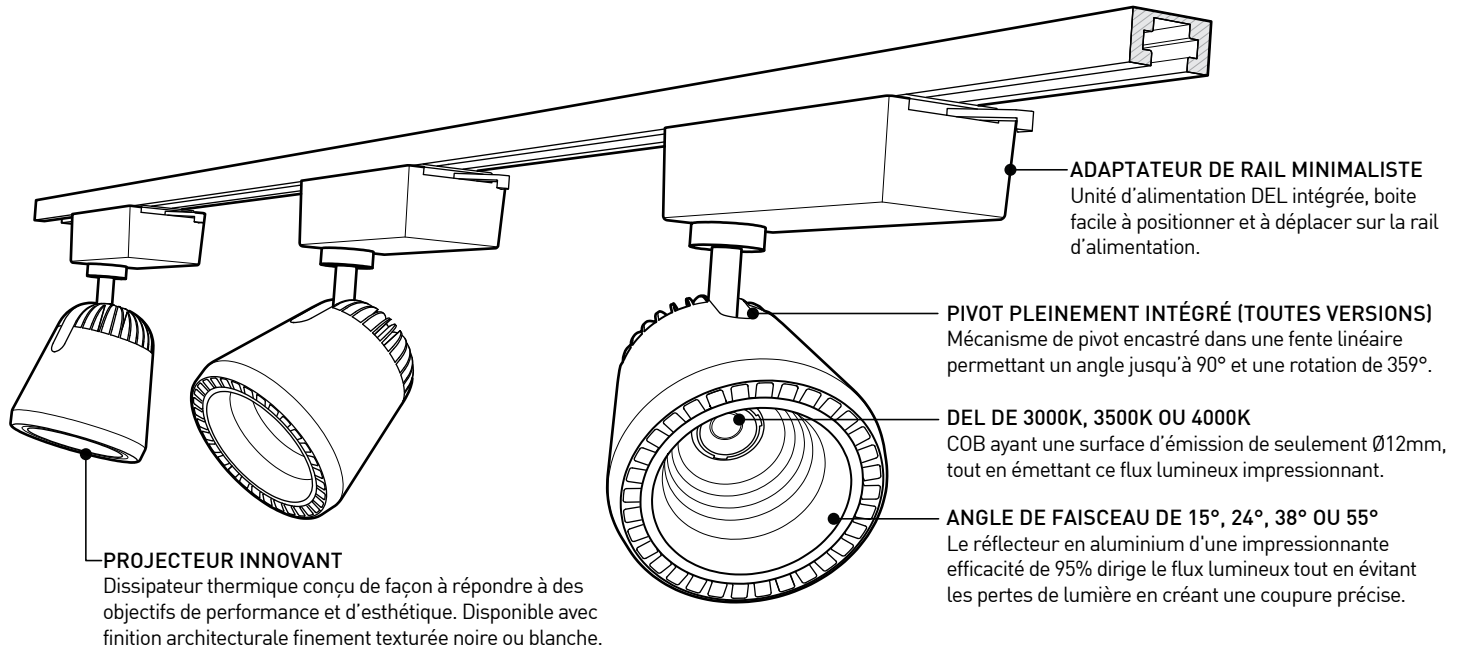


**CONSTRUCTION AVEC VENTILATION**  
Le radiateur esthétique intègre des ailettes cachées et un canal de ventilation, qui pousse la chaleur vers la section supérieure exposée à l'air ambiant.




**EUREKA 3983**  
Boîte de jonction profonde pour les versions sur pavillon mince.




**UNITÉ D'ALIMENTATION**  
Gradation "phase" (DP) ou 0-10V (DV).

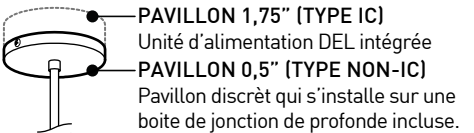

**PAVILLON 1,75" (TYPE IC)**  
Unité d'alimentation DEL intégrée  
**PAVILLON 0,5" (TYPE NON-IC)**  
Pavillon discret qui s'installe sur une boîte de jonction de profonde incluse.

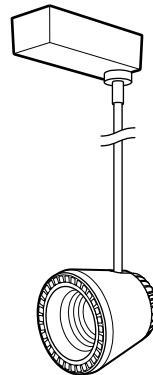


2047  
TIGE SUR RAIL

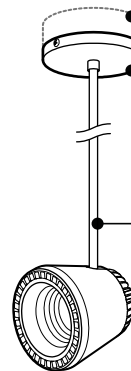


2047  
TIGE SUR PAVILLON


**MONTAGE SUR TIGE**  
Tige de Ø10mm, disponible en plusieurs longueurs, sur adaptateur de rail ou sur pavillon.



4547  
PAVILLON (MURAL)



4547  
PAVILLON (PLAFOND)



2047  
SUR RAIL

## SPECIFICATIONS

SOURCE LUMINEUSE  
LUMENS (LIVRÉS)

IRC

CCT

RADIATEUR

DISTRIBUTION LUMINEUSE

RÉFLECTEUR

UNITÉ D'ALIMENTATION

GRADATION (VOLTAGE)

LM-79

GARANTIE

## DEL 18W

1 DEL "COB" - Puissance totale de 21,3W

2177 lumens (102 lm/W)

83 CRI (typique)

4000K 3-step MacAdam Ellipse binning

Aluminium moulé, finition noire ou blanche finement texturée

Projecteur directionnel (2047 and 4547)

Aluminium, FWHM 15°, 24°, 38° ou 55°

Courant constant de 500mA, Reconnu par UL

Gradation "phase" (DP) 120V ou gradation 0-10V (DV) 120-277V

Sur demande

5 ans

## DEL 25W

1 DEL "COB" - Puissance totale de 30,6W

2803 lumens (92 lm/W)

Courant constant de 700mA, Reconnu par UL



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



2047  
4547