

# DROPLET CELESTE 2448-CEL DEEP JUNCTION BOX MOUNTING

PROJECT PROJÉT
SPEC TYPE
NOTES

## CANOPY FINISH FINI PAVILLON



BLKE


## GLASS FINISH FINI VERRE




CLR

FRO

## DEEP JUNCTION BOX BOÎTE DE JONCTION PROFONDE



3983

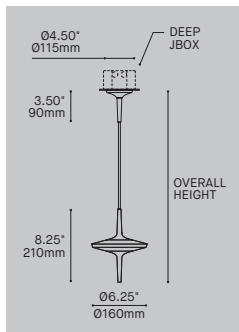


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	<b>2448-CEL</b> DROPLET CELESTE – JUNCTION BOX MOUNTING	<b>2448-CEL</b>
<b>CONFIGURATION CONFIGURATION</b>	<b>101U</b> SINGLE UNIT 1 CABLE, 1 HEAD MIN. HEIGHT 16"	<b>101U</b>
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	<b>LED</b> REGULAR OUTPUT	<b>LED</b>
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>	<b>90</b> 90+ CRI	<b>90</b>
<b>VOLTAGE VOLTAGE</b>	<b>120V</b> 120 VOLT <b>277V</b> 277 VOLT	
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>	<b>DV</b> 0-10V DIMMING (120V-277V) <b>NLTAIR2*</b> NLIGHT AIR CONTROL GEN 2 <b>NLIGHT*</b> NLIGHT WIRED CONTROL <small>* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.</small>	<b>DV</b>
<b>CABLE CÂBLE</b>	<b>C</b> BLACK CABLE, CONNECTOR MOUNTED, NOT FIELD ADJUSTABLE	<b>C</b>
<b>OVERALL HEIGHT HAUTEUR HORS TOUT</b>	<b>**</b> CUSTOM OVERALL HEIGHT (PLEASE SPECIFY) <small>OVERALL HEIGHT MEASURED FROM CEILING TO BOTTOM OF FIXTURE PLEASE REFER TO CONFIGURATION'S MINIMUM HEIGHT FOR SPECIFICATION</small>	
<b>CANOPY FINISH FINI PAVILLON (A)</b>	<b>BLKE</b> BLACK FINE TEXTURE <small>(A) DECORATIVE PLATE FINISH IS ALWAYS WHITE</small>	<b>BLKE</b>
<b>HEAD FINISH FINI TÊTE</b>	<b>BLKE</b> BLACK FINE TEXTURE	<b>BLKE</b>
<b>GLASS FINISH FINI VERRE</b>	<b>CLR</b> CLEAR GLASS <b>FRO</b> FROSTED GLASS	
<b>ACCESSORY ACCESSOIRE</b>	<b>3983</b> DEEP JUNCTION BOX (PROVIDED) <b>39NLAA*</b> NLIGHT AIR GEN 2 REMOTE CONTROL BOX <b>39NLWA*</b> NLIGHT WIRED REMOTE CONTROL BOX <small>* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .</small>	<b>3983</b>

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



# CELESTE

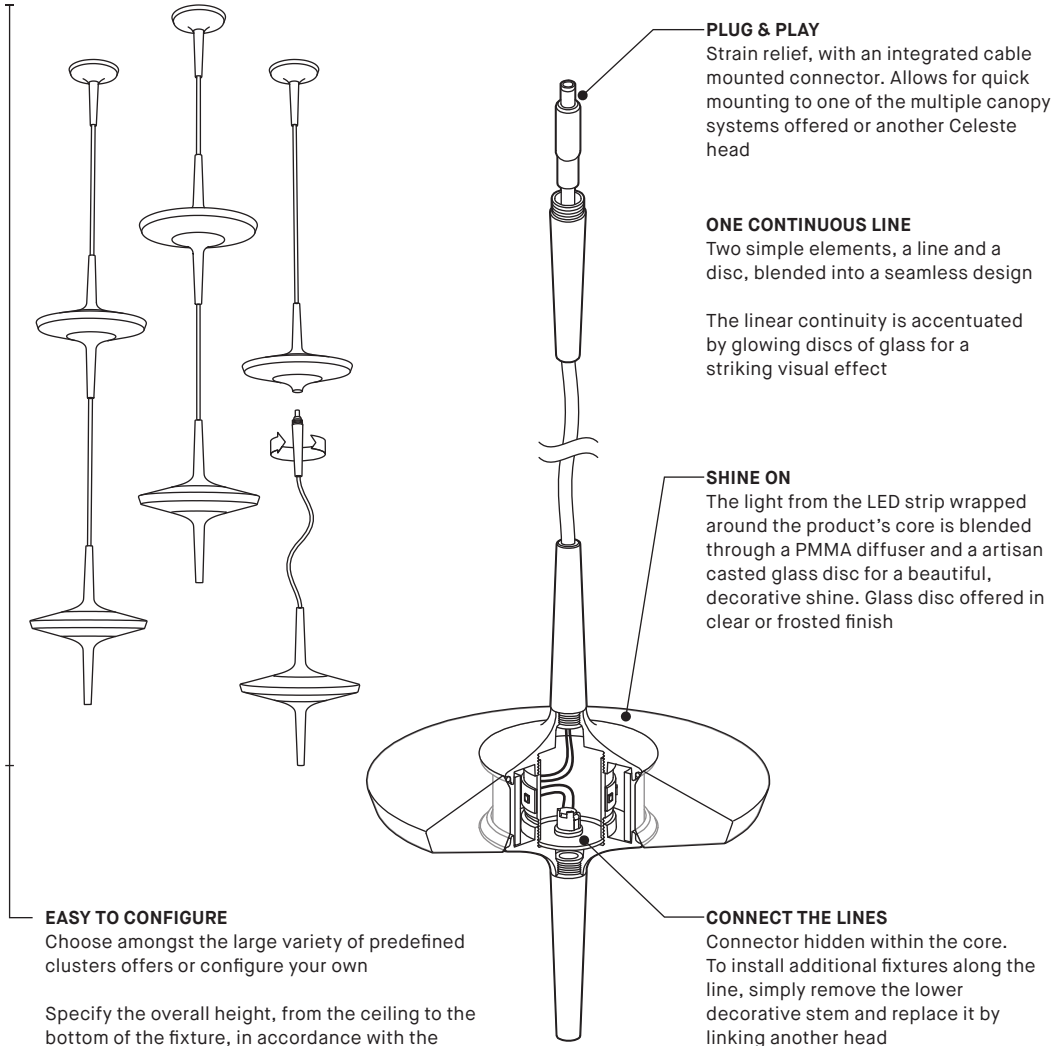

**EASY TO CONFIGURE**

Choose amongst the large variety of predefined clusters offers or configure your own

Specify the overall height, from the ceiling to the bottom of the fixture, in accordance with the configuration's minimum height and we'll take care of the rest

**PLUG & PLAY**

Strain relief, with an integrated cable mounted connector. Allows for quick mounting to one of the multiple canopy systems offered or another Celeste head

**ONE CONTINUOUS LINE**

Two simple elements, a line and a disc, blended into a seamless design

The linear continuity is accentuated by glowing discs of glass for a striking visual effect


**SHINE ON**

The light from the LED strip wrapped around the product's core is blended through a PMMA diffuser and a artisan casted glass disc for a beautiful, decorative shine. Glass disc offered in clear or frosted finish

**CONNECT THE LINES**

Connector hidden within the core. To install additional fixtures along the line, simply remove the lower decorative stem and replace it by linking another head


## CELESTE SYSTEMS




**DROPLET CELESTE 2447-CEL**  
Remote junction box option  
Offered with 1, 3, 5, or 6 connector mounted mini canopies



**DROPLET CELESTE 2448-CEL**  
Octagonal junction box mounting  
Offered with 1 connector mounted mini canopy and decorative plate covering the junction box



**ARRAY CELESTE 4425-CEL**  
Offered with 3 or 5 connectors



**DROP CELESTE 4427-CEL**  
Offered with 3 or 6 connectors



**CELESTE 4010-CEL**  
Extra head accessory light source  
Requires a Celeste system (sold separately)


**PRODUCT SPECIFICATION**      **XXX-CEL-CLR**      **XXX-CEL-FRO**

PERFORMANCE		
WATTAGE PER HEAD	3.8W	3.8W
DELIVERED LUMENS PER HEAD (4000K)	200 LM	235LM
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM HEADS PER CABLE	6 HEADS	6 HEADS
MAXIMUM HEADS ON SYSTEM	20 HEADS	20 HEADS


**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

**LIGHT DISTRIBUTION**

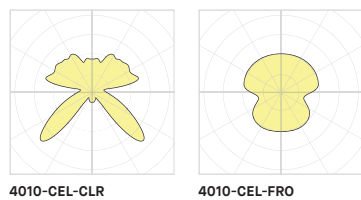

Visit our website for warranty terms and conditions.

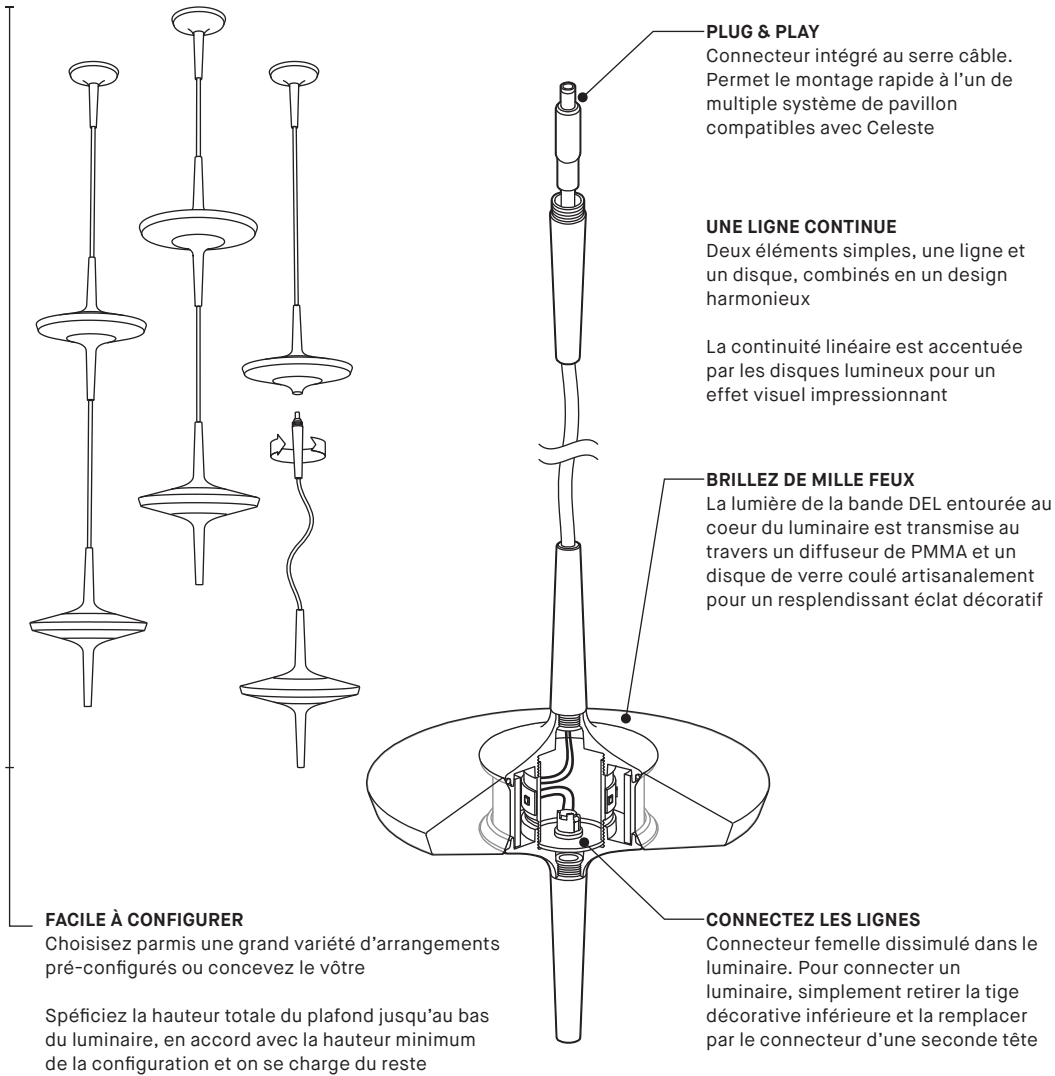

## SYSTÈMES CELESTE

**DROPLET CELESTE 2447-CEL**  
Option avec boîtes de jonction éloignée  
Offert avec 1, 3, 5, ou 6 mini pavillons munis de connecteurs

**DROPLET CELESTE 2448-CEL**  
Montage sur boîte de jonction octogonale  
Offert avec 1 mini pavillon muni d'un connecteur et une plaque décorative couvrant la boîte de jonction

**ARRAY CELESTE 4425-CEL**  
Offert avec 3 ou 5 connecteurs

**DROP CELESTE 4427-CEL**  
Offert avec 3 ou 6 connecteurs

**CELESTE 4010-CEL**  
Accessoire tête lumineuse supplémentaire  
Requiert un système Celeste (vendu séparément)


### SPÉCIFICATION PRODUIT

	XXX-CEL-CLR	XXX-CEL-FRO
<b>PERFORMANCE</b>		
PUISSANCE PAR TÊTE	3.8W	3.8W
LUMENS RÉELS PAR TÊTE (4000K)	200 LM	235LM
<b>AUTRES INFORMATION</b>		
POIDS PAR TÊTE	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM DE TÊTES PAR CÂBLE	6 TÊTES	6 TÊTES
MAXIMUM DE TÊTES SUR LE SYSTÈME	20 TÊTES	20 TÊTES

### FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

### LIGHT DISTRIBUTION

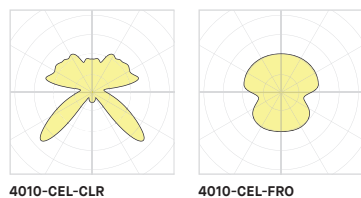

Visitez notre site Web pour les termes et conditions.