

SILENE CLASSIC DOUBLE 3155B-JMJ

PROJECT PROJET

SPEC TYPE


NOTES



OPTIONS



JMJ-CLR

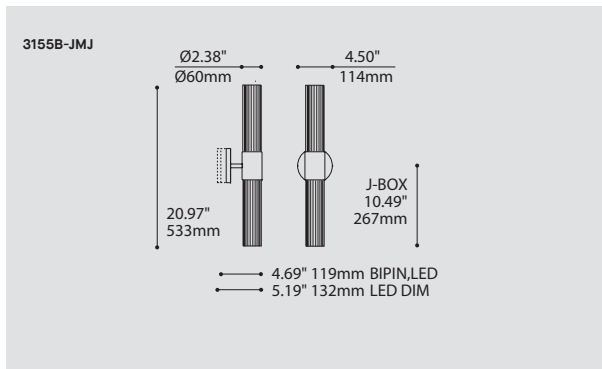

FAMILY FAMILLE



1181A CEILING SURFACE



4156B-JMJ

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3155B-JMJ

3155B-JMJ SILENE CLASSIC DOUBLE JMJ

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

2XBIPIN.35 35W X 2, HAL, BIPIN, GY6.35 BASE

2XLED.4 4W X 2, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

27 2700K

30 3000K

35 3500K

40* 4000K

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

FOR LED ONLY- MANDATORY

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

FOR LED ONLY

DV 0-10V DIMMING (120-277V)*

DP PHASE DIMMING (120V ONLY)*

MOUNTING MONTAGE

RC

RC ROUND CANOPY / PAVILLON ROND

FOR HAL & LED: 1.00" CANOPY (2401E)



FOR LED DIMMABLE: 1.75" CANOPY (2403G)



STRUCTURE FINISH FINI STRUCTURE

SC SATIN CHROME

CHR CHROME

DIFFUSER FINISH FINI DIFFUSEUR

CLR

CLR CLEAR

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

Double silene diffuser sconce with straight stem and screw mount diffuser.

LIGHT SOURCE:

LED and other light sources also available.

STRUCTURE:

Die-stamped steel and tubular steel structure with plated finish.

DIFFUSER:

Hand blown frosted or white triplex glass (JDJ) or extruded clear ribbed diffuser (JMJ).

Also available with a closed top and bottom acrylic shade (JDJA).

c-CSA-us

CERTIFIED:

CONCEPTION:

Applique double munie d'une tige droite et de filets pour visser le diffuser.

SOURCE LUMINEUSE:

DEL et autres sources offertes.

STRUCTURE:

Acier embouti et structure d'acier tubulaire plaqués.

DIFFUSEUR:

Diffuseur triplex givré ou blanc soufflé à la main (JDJ) ou extrudé strié clair (JMJ).

Aussi offert avec un diffuseur en acrylique au dessus et dessous fermé (JDJA).

CERTIFIÉ:



c-CSA-us

WALL MOUNT 3155B-JMJ/JDJ/JDJA


SUSPENSION 4156B-JMJ/JDJ/JDJA

WALL MOUNT 3156B-JMJ/JDJ/JDJA


- SCREW MOUNT GLASS
JMJ-CLR
Extruded clear or frosted ribbed glass
- JDJ-WH/FRO
Hand blown white triplex glass
- JDJA-WH
Closed top white acrylic shade
- LED MODULE WITH DIE-CAST ALUMINUM HEATSINK (DOUBLE FOR 3155B)
Black anodized for improved thermal management
- STRUCTURE
Die-stamped steel with plated finish

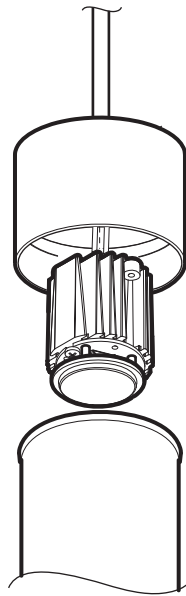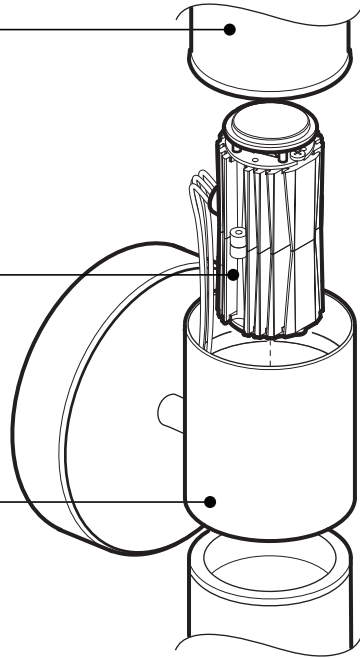


48° TOTAL BEAM ANGLE
PMMA TIR (total internal reflecting) Ledil optic

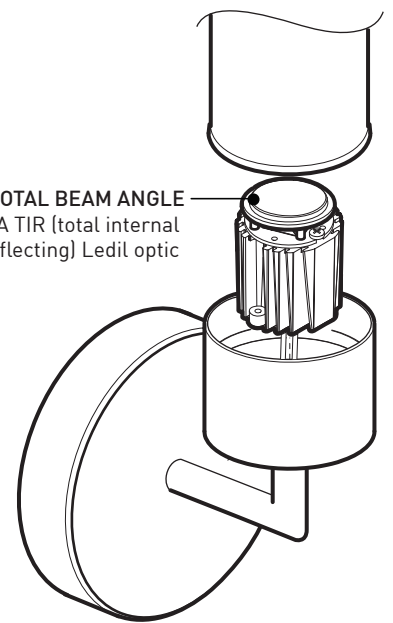


OTHER LIGHT SOURCES AVAILABLE
Halogen (for JDJ/JMJ)
Incandescent (for JDJ/JMJ)

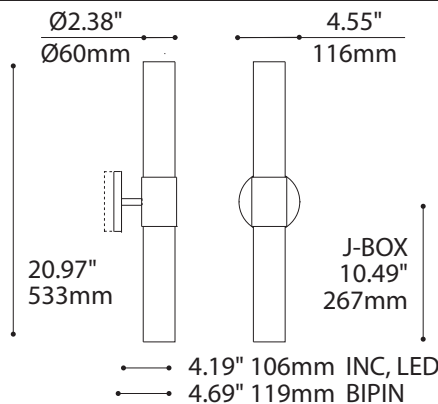

3155B

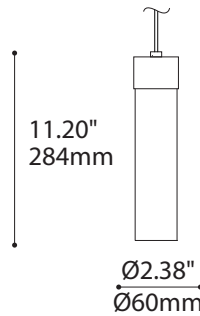

4156B

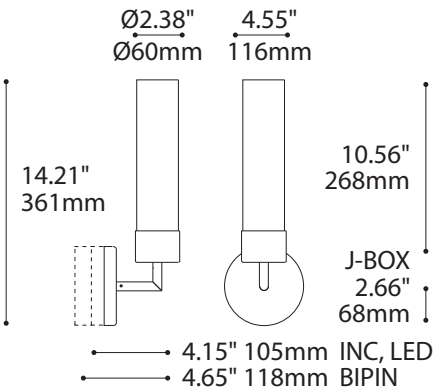

3156B

SPECIFICATIONS

LIGHT SOURCE MODULE
LUMENS (DELIVERED)
CRI
ROHS
VOLTAGE
DRIVER
DIMMING
WARRANTY
LM-79 & CERTIFICATION

3155B LED

2 x Nichia - total ± 8 w
UL recognized - made in USA
880 lm (JDJ-WH) / 626 lm (JDJA-WH)
85 CRI (typical)
Compliant
120V - 277V
350 mA
Phase dimming (DP) & 0-10V Dimming (DV)
5 years (on electronic components)
On request & CSA recognized

4156B /3156B LED

1 x Nichia - total ± 4 w
440 lm (JDJ-WH) / 312 lm (JDJA-WH)

SPECIFICATIONS

LIGHT SOURCE
VOLTAGE

Halogen (for JDJ/JMJ)

Bipin 50 w (x 2 for 3155B)
120V-277V

Incandescent (for JDJ/JMJ)

B10/T10 100 w (x 2 for 3155B)
120V




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




3155B 4156B
3156B


APPLIQUE MURALE 3155B-JMJ/JDJ/JDJA

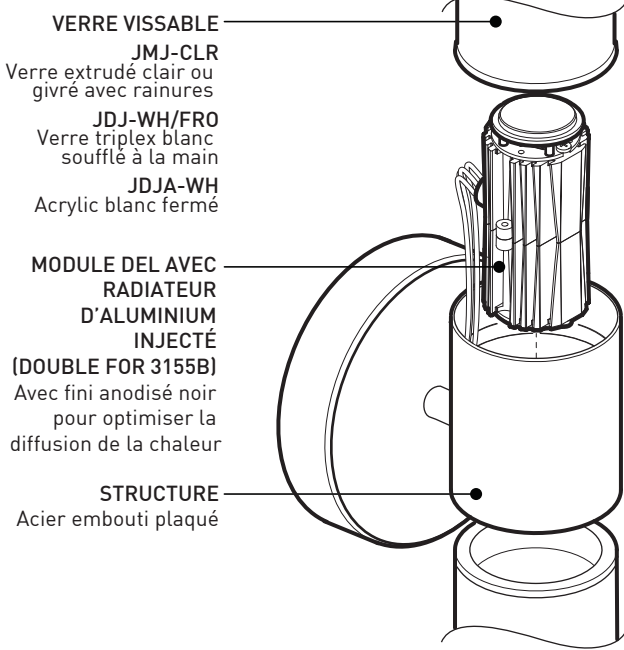


SUSPENSION 4156B-JMJ/JDJ/JDJA APPLIQUE MURALE 3156B-JMJ/JDJ/JDJA

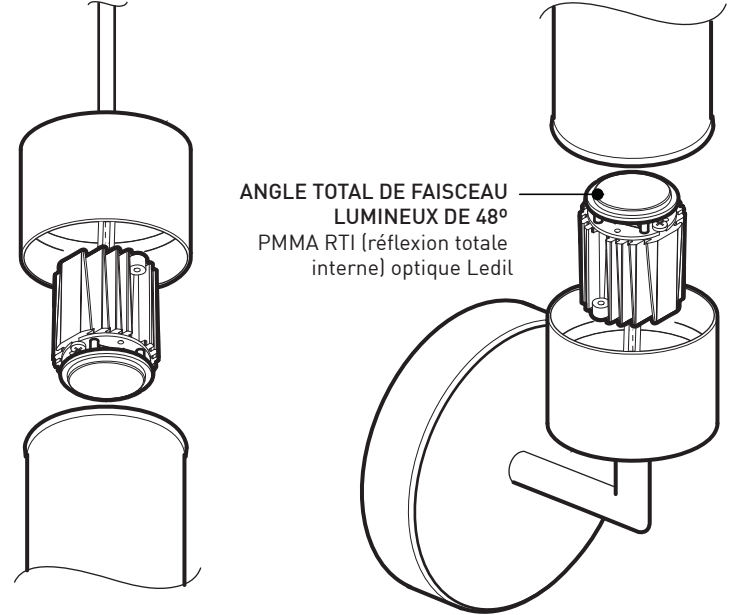


AUTRES SOURCES LUMINEUSES DISPONIBLES
Halogène (pour JDJ/JMJ)
Incandescent (pour JDJ/JMJ)

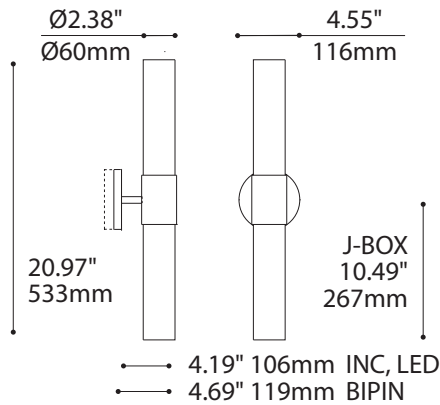

3155B

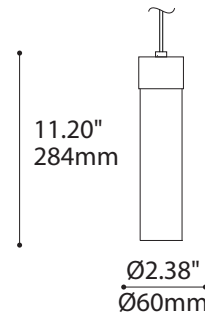

4156B

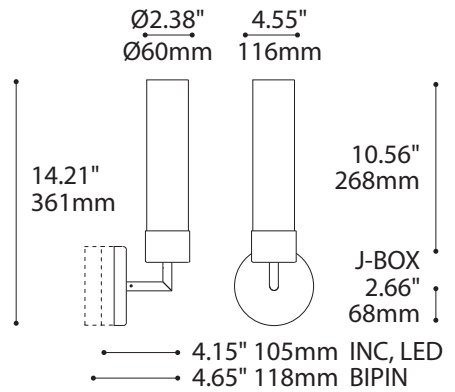

3156B

SPECIFICATIONS

SOURCE LUMINEUSE
MODULE
LUMENS LIVRÉ
IRC
ROHS
VOLTAGE
PILOTE
GRADATION
GARANTIE
LM-79 & CERTIFICATION

3155B DEL

2 x Nichia - total ±8 w
Reconnu par UL - fabriqué aux États-Unis
880 lm (JDJ-WH) / 626 lm (JDJA-WH)
85 CRI [typique]
Conforme
120V - 277V
350 mA
Gradation phase [DP] & Gradation 0-10V [DV]
5 ans (sur les composantes électroniques)
Sur demande & reconnu par CSA

4156B /3156B DEL

1 x Nichia - total ±4 w
440 lm (JDJ-WH) / 312 lm (JDJA-WH)

SPECIFICATIONS

SOURCE LUMINEUSE
VOLTAGE

Halogène (for JDJ/JMJ)

Bipin 50 w (x 2 pour 3155B)
120V-277V

Incandescent (for JDJ/JMJ)

B10/T10 100 w (x 2 pour 3155B)
120V



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalingting.com



3155B 4156B
3156B