



NODE 3446B


| |
|----------------|
| PROJECT PROJET |
| SPEC TYPE |
| NOTES |

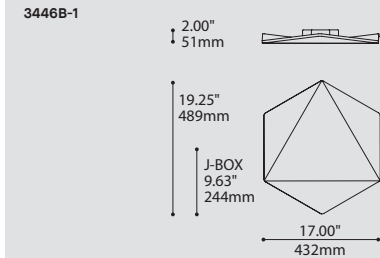

OPTIONS



3446B-4, 3446B-6 (EXAMPLES)




| ORDERING SPECIFICATION | SPÉCIFICATION DE COMMANDE | CODE |
|---|---------------------------|------------|
| MODEL MODÈLE | | |
| 3446B-1 | NODE 17" SET OF 1 | |
| 3446B-4 | NODE 17" SET OF 4 | |
| 3446B-6 | NODE 17" SET OF 6 | |
| LIGHT SOURCE SOURCE LUMINEUSE | | |
| (WATTAGE, LAMP TYPE, OTHER INFO) | | |
| LED.6 | 6W, LED (PER UNIT) | |
| COLOR TEMPERATURE TEMPÉRATURE DE COULEUR | | |
| 30 | 3000K | |
| 35 | 3500K | |
| 40 | 4000K | |
| VOLTAGE VOLTAGE | | |
| 120V | 120 VOLT | |
| 277V | 277 VOLT | |
| DIMMING OPTION OPTION DE GRADATION | | |
| DV | 0-10V DIMMING (120-277V) | |
| DP | PHASE DIMMING (120V ONLY) | |
| LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE. | | |
| SHADE LOCK OPTION OPTION D'ABAT-JOUR BARRÉ | | |
| IF NO OPTION IS SELECTED, THE SHADE ATTACHMENT IS MAGNETIC. | | |
| LOC | NON REMOVABLE SHADE* | |
| *SECURED WITH SCREW IN ADDITION TO MAGNETIC ATTACHMENT | | |
| STRUCTURE FINISH FINI STRUCTURE | | WHE |
| WHE | WHITE FINE TEXTURE | |
| SHADE FINISH FINI ABAT-JOUR | | |
| CHF | CHARCOAL FELT | |
| REF | RED FELT | |
| SGF | SILVER GRAY FELT | |

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** Compose an original pattern of light with these warmly diffused soft felt hexagonal shapes. Create your personal motif using one or several sets of up to 12 Nodes at varying angles to add a large unique ambient lighting pattern and inspiration to your space.
- INSTALLATION:** Designed for rapid installation of up to 12 units on a single junction box. Quick connection through a discreet joiner arm on mounting surface. Units are added in increments of 60°. The shade is quickly secured with magnetic fittings (screw attachment option available).
- SHADE:** A hexagon shaped 3D molded synthetic felt material made of recycled polyester; it is light, rigid, recyclable and sound absorbing. Low VOC, no formaldehyde, non-irritable, odourless, stable.
- CERTIFIED:** c-CSA-us. ASTM C423 0.75 NRC material. Fire rating equivalent: C423 ASTM E-84 / CAN ULC S102 Class A
- CONCEPTION:** Créez un motif original et infini de lumière diffuse avec ces formes hexagonales feutrées. Isolez un Node ou regroupez jusqu'à douze hexagones reliés ensemble selon les angles que vous désirez pour ajouter un grand effet créatif de lumière ambiante dans votre espace.
- INSTALLATION:** Conçu pour une installation rapide, seulement une boîte de jonction est requise pour toute installation jusqu'à un maximum de 12 unités. Joints par des bras de connexion avec connecteurs rapides localisés discrètement sur la surface de montage, chaque Node peut s'orienter en incréments de 60° entre eux durant l'installation. L'abat-jour est fixé instantanément avec de puissants aimants (attache par vis offert en option).
- ABAT-JOUR:** Forme hexagonale moulée en feutre aux propriétés acoustiques et composée de polyester recyclé. Légère, rigide, recyclable, bas COV, sans formaldéhyde, non irritabile et inodore.
- CERTIFIÉ:** c-CSA-us. Acoustique: ASTM C423: NRC 0.75. Résistance Feu équivalent: ASTM E-84 / CAN ULC S102 Classe A

FAMILY FAMILLE

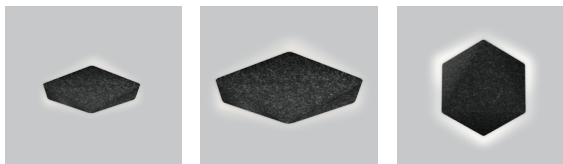

3446 (CEILING)

3446B (CEILING)

3446 (WALL)

A CUSTOM LIGHT INSTALLATION FOR YOUR SPACE

Starting from a single power connection, connect a set of up to 12 Nodes for your personalised motif design. Install additional sets to expand the pattern further.



CREATIVE NETWORK

Here are just a few examples of the endless possibilities of Node:




WEB OF LIGHT

Each Node emits a soft spread of indirect light on the wall or ceiling. The cumulative effect of multiple lights combines to enliven and brighten the room.



FLEXIBLE SETUP

Connect up to 12 Nodes with connector bars in angles of 0°, +60° and -60°. Optionally create Secondary Branches at available locations. The total quantity is the set size. Install more sets to continue the pattern.

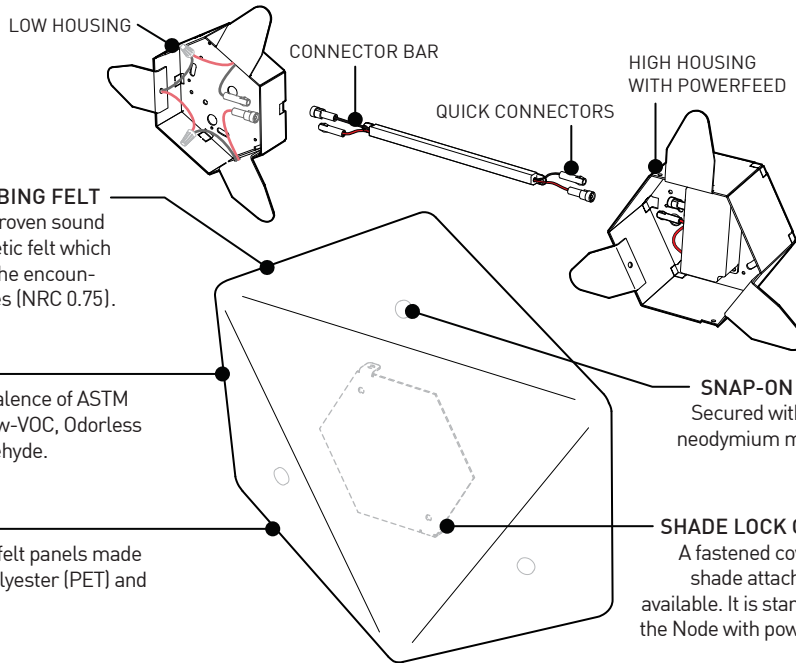

SOUND ABSORBING FELT
Composed of a proven sound absorbing synthetic felt which absorbs 75% of the encountered soundwaves (NRC 0.75).

SAFE
Fire Rated equivalence of ASTM E-84 Class A. Low-VOC, Odorless and no Formaldehyde.


ECOLOGICAL
Custom molded felt panels made from recycled polyester (PET) and are recyclable.




SNAP-ON SHADE
Secured with strong neodymium magnets.

SHADE LOCK OPTION
A fastened coverplate shade attachment is available. It is standard on the Node with power feed.


12" SIZE




OFFERED SETS:



17" SIZE



OFFERED SETS:



SPECIFICATIONS

| | 3446-1 | 3446-4 | 3446-6 | 3446-12 | 3446B-1 | 3446B-4 | 3446B-6 |
|--------------------|---|----------------|----------------|----------------|---------------|----------------|---|
| LIGHT SOURCE | 3x Nichia LED | 12x Nichia LED | 18x Nichia LED | 36x Nichia LED | 3x Nichia LED | 12x Nichia LED | 18x Nichia LED |
| DELIVERED LUMENS | 330lm (4000K) | 1320lm (4000K) | 1980lm (4000K) | 3960lm (4000K) | 595lm (4000K) | 2380lm (4000K) | 3570lm (4000K) |
| SYSTEM WATTAGE | 3,8W Total | 14W Total | 21W Total | 42W Total | 7,5W Total | 28W Total | 42W Total |
| LIGHT DISTRIBUTION | Indirect | | | | | | |
| CRI | 85 CRI Typical | | | | | | |
| VOLTAGE | 120V - 277V (Phase dimming is 120v only) | | | | | | |
| STRUCTURE | Recycled Polyester felt shade, Die formed 18ga steel housing | | | | | | |
| LED MODULE | Mid power LED, UL Recognized, Proprietary design, Made in USA | | | | | | |
| DRIVER & DIMMING | Constant Current, 0-10V dimming (DV) & Phase dimming (DP)*, UL Recognized | | | | | | *3446-1 is not available with Phase dimming |
| LM-79 | On request | | | | | | |
| WARRANTY | 5 years | | | | | | |



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



3446X-XX

CRÉER VOTRE MOTIF

À partir d'un seul boîtier d'alimentation électrique, connecter un ensemble de jusqu'à 12 Nodes dans un motif personnalisé. Installer d'autres ensembles afin d'agrandir le motif davantage.



RESEAU CRÉATIF

Voici quelques exemples des possibilités infinies du Node:



TISSAGE DE LUMIÈRE


Chaque Node émet un doux diffusion de lumière indirecte sur le mur ou plafond. L'effet cumulatif des Nodes se combinent pour animer et éclaircir votre espace.

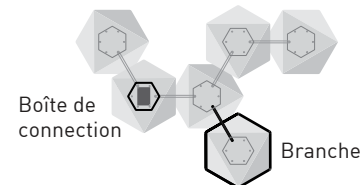


INSTALLATION FLEXIBLE

Connecter jusqu'à 12 Nodes avec barres de connection dans des angles de 0°, +60° et -60°. Placer optionnellement des branches secondaires. La quantité totale est la celle de l'ensemble. Installer plus d'ensembles afin de continuer le motif.


GRANDEUR 12"





ENSEMBLES OFFERTS :



GRANDEUR 17"



ENSEMBLES OFFERTS :

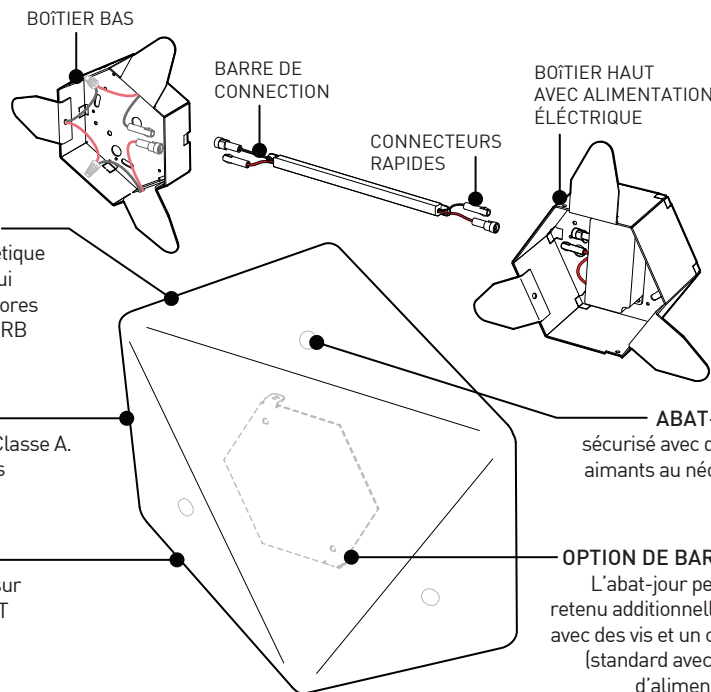

MATÉRIAU ACOUSTIQUE

Composé d'un feutre synthétique acoustique rigide éprouvé qui absorbe 75% des ondes sonores qui le rencontrent avec un CRB (NRC) de 0.75.

SÉCURITAIRE

Résistance feu ASTM E-84 Classe A. Bas COV, sans odeur et sans Formaldéhyde.

ÉCOLOGIQUE

Panneaux de feutre moulé sur mesure fait de polyester PET recyclés et recyclables.



SPÉCIFICATIONS

| | 3446-1 | 3446-4 | 3446-6 | 3446-12 | 3446B-1 | 3446B-4 | 3446B-6 |
|------------------------|---|----------------|----------------|----------------|---|----------------|----------------|
| SOURCE LUMINEUSE | 3 DEL Nichia | 12 DEL Nichia | 18 DEL Nichia | 36 DEL Nichia | 3 DEL Nichia | 12 DEL Nichia | 18 DEL Nichia |
| LUMENS LIVRÉS | 330lm (4000K) | 1320lm (4000K) | 1980lm (4000K) | 3960lm (4000K) | 595lm (4000K) | 2380lm (4000K) | 3570lm (4000K) |
| WATTAGE SYSTÈME | 3,8W Total | 14W Total | 21W Total | 42W Total | 7,5W Total | 28W Total | 42W Total |
| DISTRIBUTION LUMINEUSE | Indirecte | | | | | | |
| IRC | 85 IRC Typique | | | | | | |
| VOLTAGE | 120V - 277V (Gradation Phase en 120V seulement) | | | | | | |
| STRUCTURE | Abat-jour moulé en polyester recyclé, Boîtier en acier 18ga | | | | | | |
| MODULE DEL | DEL de moyenne puissance, Reconnu UL, Conception Eureka, fait au É.U. | | | | | | |
| UNITÉ D'ALIMENTATION | Courant constant, gradation 0-10V (DV) et Gradation phase (DP)*, Reconnu UL | | | | *3446-1 n'est pas disponible avec gradation Phase | | |
| LM-79 | Sur demande | | | | | | |
| GARANTIE | 5 ans | | | | | | |



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



3446X-XX