

# MEHA 4029-UAC / FACET 4029-UFC

PROJECT PROJET
SPEC TYPE
NOTES



## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED TRACK 1 CIRCUIT	LED*	LED DIM*
MOUNTING	2734E	2401C	2403G
CABLE	66.80"	65.85"	67.10"



\*FOR CABLE ≤12IN -CANOPY 2401C + ACCESSORY 3983

## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E	2401C	2403G
6.15" x 2.00" 156 x 51mm	Ø4.50" x 0.50" Ø114 x 12.7mm	Ø4.50" x 1.75" Ø114 x 44mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

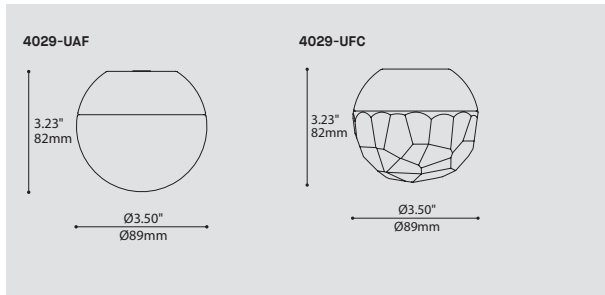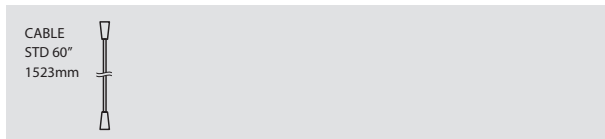

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		
4029-UAC	MEHA	
4029-UFC	FACET	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.1*	1W, LED	
LED.4	4W, LED	
	*NOT AVAILABLE WITH DIMMING, 2700K AND 90 CRI	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
27*	2700K	
30	3000K	
35	3500K	
40**	4000K	
	*FOR LED 4W ONLY	
	**LONGER LEAD TIME MAY APPLY.PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		
90	90+ CRI	
	FOR LED 4W ONLY - MANDATORY	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT	
277V*	277 VOLT	
	*NOT AVAILABLE WITH TRACK ADAPTATOR	
<b>DIMMING OPTION OPTION DE GRADATION</b>		
DV*	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
	*NOT AVAILABLE WITH TRACK ADAPTATOR	
	DIMMING AVAILABLE WITH 4W ONLY	
<b>CABLE CABLE</b>		<b>C</b>
C	CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CABLE</b>		
60	60" CABLE (STD LENGHT)	
**	CUSTOM CABLE LENGH (PLEASE SPECIFY)*	
	*3983 ACCESSORY PROVIDED FOR CABLE ≤ 12"	
	**MAX CABLE LENGTH 120" FOR NON-DIMMING	
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>MOUNTING MONTAGE</b>		
RC	ROUND CANOPY / PAVILLON ROND FOR NON-DIMMING LED & CABLE ≤ 12": 0.50" CANOPY (2401C) FOR DIMMING LED: 1.50" CANOPY (2403G)	
TA1	TRACK ADAPTOR / ADAPTEUR DE RAIL 1 CIRCUIT LED DIMMING & NON-DIMMING 120V ADAPTOR (2734E)	
<b>TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL<sup>(A)</sup></b>		
WH	WHITE	
BLK	BLACK	
	<sup>(A)</sup> FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
<b>CANOPY FINISH FINI PAVILLON</b>		<b>SC</b>
SC	SATIN CHROME	
<b>HEATSINK FINISH FINI RADIATEUR</b>		<b>SAA</b>
SAA	SATIN ALUMINUM ANODIZED	
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		
CLR	CLEAR	
FRO	FROSTED	
<b>ACCESSORY ACCESSOIRE</b>		
3983	DEEP JUNCTION BOX FOR CABLE ≤ 12" AS PER ABOVE	



## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** Meha and her edgy sister, Facet, are decorative spheres of light that can be used as single elegant geometrical objects to punctuate a space or in multiples to create illuminated clouds and populate larger areas.

**CONSTRUCTION:** Satin aluminum anodized heat sink and heavy pressed glass diffuser with smooth (UAC) or faceted (UFC) surface.

**CERTIFIED:** c-CSA-us

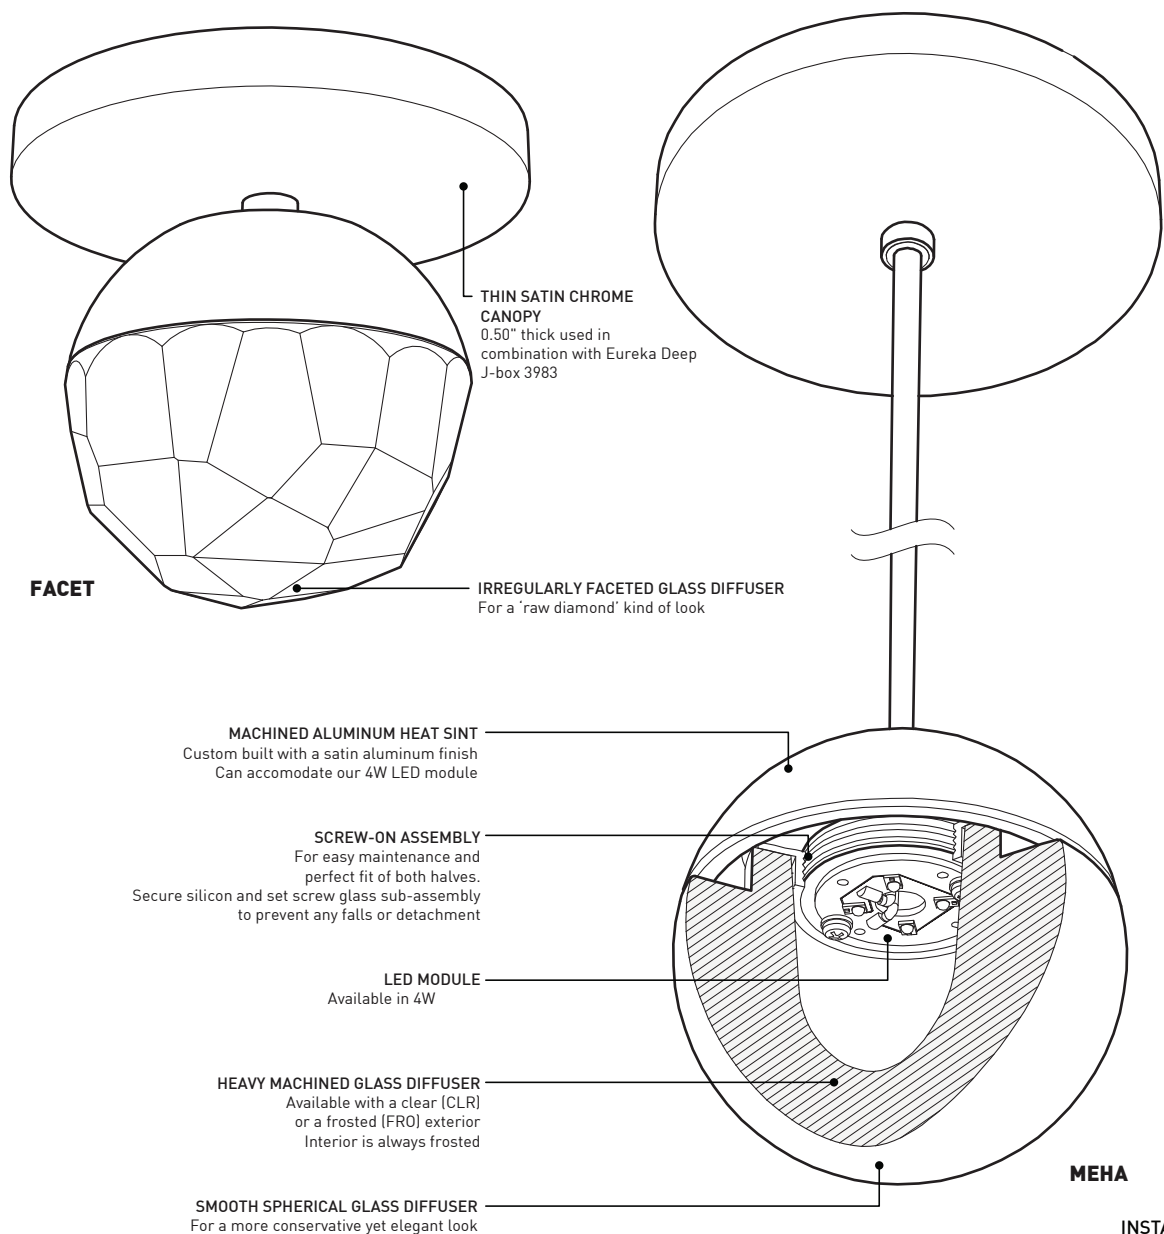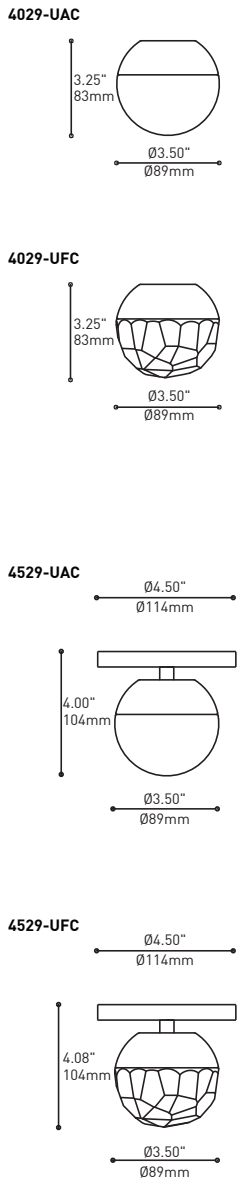

**INSTALLATION**  
Also available on track mount adaptor

## SPECIFICATIONS

	1W LED	4W LED
LIGHT SOURCE	4 x high powered LEDs on MCPCB - total ±1 w	4 x high powered LEDs on MCPCB - total ±4 w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	105lm (4000K)	400 lm (4000K)
CRI	80 CRI (typical)	
LIGHT DISTRIBUTION	Direct	
HEATSINK	Machined aluminum with satin aluminum finish	
DIFFUSER	Heavy machined glass available in clear-frost(CLR) and frost(FRO) and smooth(UAC) or faceted(UFC)	
VOLTAGE	120V (DP) or 120-277V (DV or non-dimming)	
DRIVER	Constant Current driver 350 mA, UL Recognized	
DIMMING	Phase Dimming (DP) and 0-10V Dimming (DV)	
LM-79	On request	
WARRANTY	5 years (on electronic components)	
CERTIFICATION	CSA recognized	








225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



4029-UAC  
4029-UFC

4529-UAC  
4529-UFC

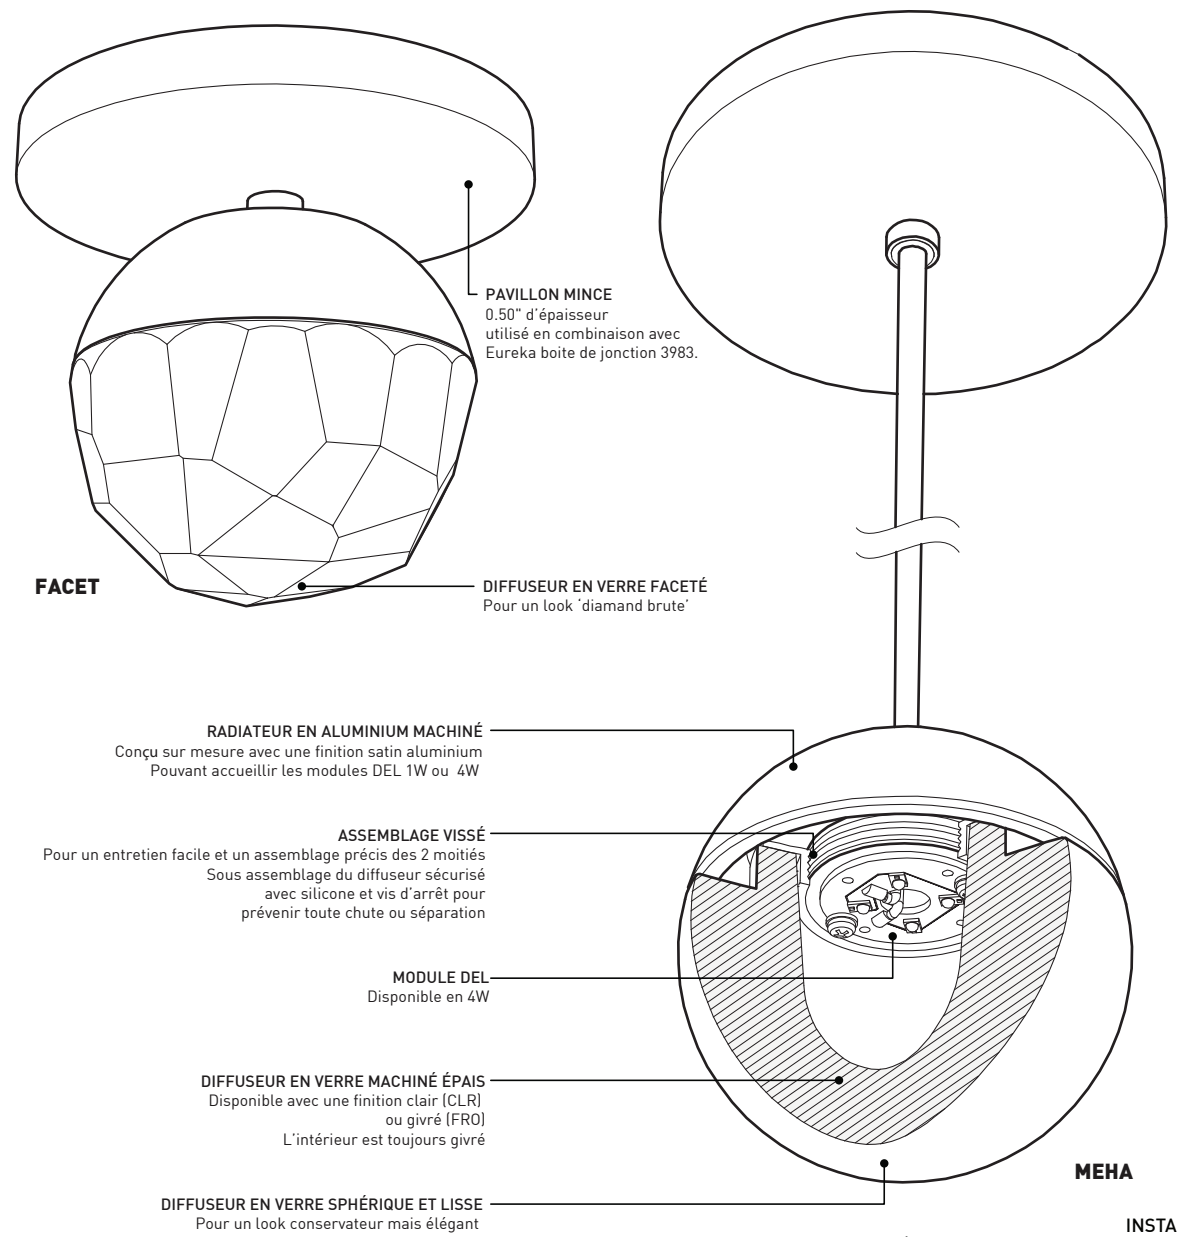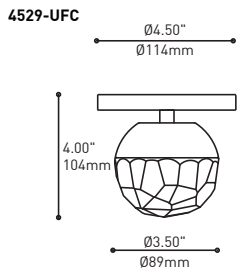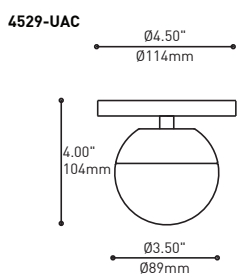

**MEHA**

**INSTALLATION**  
Également disponible sur système de rails

## SPÉCIFICATIONS

	1W LED	DEL 4W
SOURCE LUMINEUSE	4 x high powered LEDs on MCPCB - total ±1 w	4 DEL 1W haute puissance sur MCPCB - total ±4 w
MODULE	Reconnue par UL - Fabriqué aux États-Unis	
LUMENS RÉELS	105lm (4000K)	400 lm (4000K)
IRC	80 CRI (typique)	
DISTRIBUTION LUMINEUSE	Direct	
RADIATEUR	Aluminium machiné avec finition satin aluminium	
DIFFUSEUR	Verre machiné épais disponible en clair (CLR) et en givré (FRO) ainsi qu'en lisse (UAC) ou faceté (UFC)	
VOLTAGE	120V (DP) ou 120-277V (DV ou sans intensité variable)	
DRIVER	Pilote constant courant 350 mA, reconnu UL	
GRADATION	Gradation de type 'Phase Dimming' (DP) et de type '0-10V Dimming' (DV)	
LM-79	Sur demande	
WARRANTY	5 ans (sur les composantes électroniques)	
CERTIFICATION	Reconnu pas CSA	



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



**4029-UAC**  
**4029-UFC**

**4529-UAC**  
**4529-UFC**