

POINT 4044

PROJECT PROJÉT
SPEC TYPE
NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED 8W TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	LED *	LED DIM * & 8W 277V *
MOUNTING	2734B	2734E	2401C	2403G
CABLE	66.90"	68.60"	67.10"	68.10"
STEM	42.90"	44.60"	42.10"	43.10"

*FOR NO STEM / STEM ≤ 12IN -CANOPY 2401C + ACCESSORY 3983


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2734E	2401C	2403G
1.46" x 1.36" 37 x 35mm	6.15" x 2.00" 156 x 51mm	Ø4.50" x 0.50" Ø114 x 13mm	Ø4.50" x 1.50" Ø114 x 38mm


* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	AC CABLE STD 60" 1523mm
--------------------------	-------------------------------

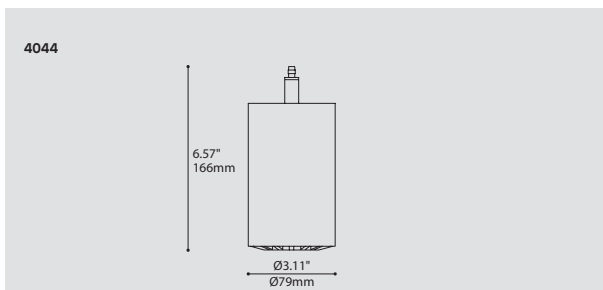


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE	
MODEL MODÈLE		4044	
4044	POINT (PENDANT)		
LIGHT SOURCE SOURCE LUMINEUSE			
(WATTAGE, LAMP TYPE, OTHER INFO)			
LED.8	8W, LED		
LED.11	11W, LED		
LED.18	18W, LED		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR			
27	2700K		
30	3000K		
35	3500K		
40*	4000K		
*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)			
90*	90+ CRI *MANDATORY FOR 8W		
ANGLE BEAM ANGLE DE DIFFUSION			
LED.8			
17	17°		
48	48°		
LED.11, LED.18			
20	20°		
40	40°		
VOLTAGE VOLTAGE			
120V	120 VOLT		
277V*	277 VOLT		
*NOT AVAILABLE WITH A TRACK ADAPTOR			
DIMMING OPTION OPTION DE GRADATION			
DV*	0-10V DIMMING (120-277V)		
DP	PHASE DIMMING (120V ONLY)		
LED DIMMING DRIVER IS STANDARD FOR 11W & 18W. PLEASE SPECIFY YOUR DIMMING TYPE. *NOT AVAILABLE WITH A TRACK ADAPTOR			
STEM OR CABLE TIGE OU CABLE			
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE		
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE			
36	36" STEM (STD LENGTH)		
60	60" AIRCRAFT CABLE (STD LENGTH)		
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)*		
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)*		
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE. *3983 ACCESSORY PROVIDED FOR STEM/CABLE ≤ 12". EXCEPT LED 8W 120V NON-DIMMING			
MOUNTING MONTAGE			
RC*	ROUND CANOPY / PAVILLON ROND FOR LED 8W 120V NON-DIMMING & STEM/CABLE ≤ 12": 0.50" CANOPY (2401C) FOR DIMMING LED, LED 8W 277V: 1.75" CANOPY (2403G) *CANOPY FINISH ALWAYS CHROME		
TA1	TRACK ADAPTOR / ADAPTEUR DE RAIL 1 CIRCUIT LED 120V ADAPTOR (2734B) (FOR LED 8W NON-DIMMING ONLY) LED DIMMING 120V ADAPTOR (2734E)		
MOUNTING OPTION OPTION DE MONTAGE			
SCA*	SLOPE CEILING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM		
TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL ^(A)			
WH	WHITE		
BLK	BLACK		
M G	METALLIC GRAY (2734B ONLY)		
^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY			
STRUCTURE FINISH FINI STRUCTURE		CHR	
CHR	CHROME		
CYLINDER FINISH FINI CYLINDRE			
BLKA	BLACK ANODIZED		
SA	SATIN ALUMINUM		
WHE	WHITE FINE TEXTURE		
HEATSINK FINISH FINI RADIATEUR		BLKA	
BLKA	BLACK ANODIZED		
ACCESSORY ACCESSOIRE			
3983	DEEP JUNCTION BOX (PROVIDED FOR STEM ≤ 12" AS PER ABOVE)		
PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT			
BIM	DIM	IES	LED

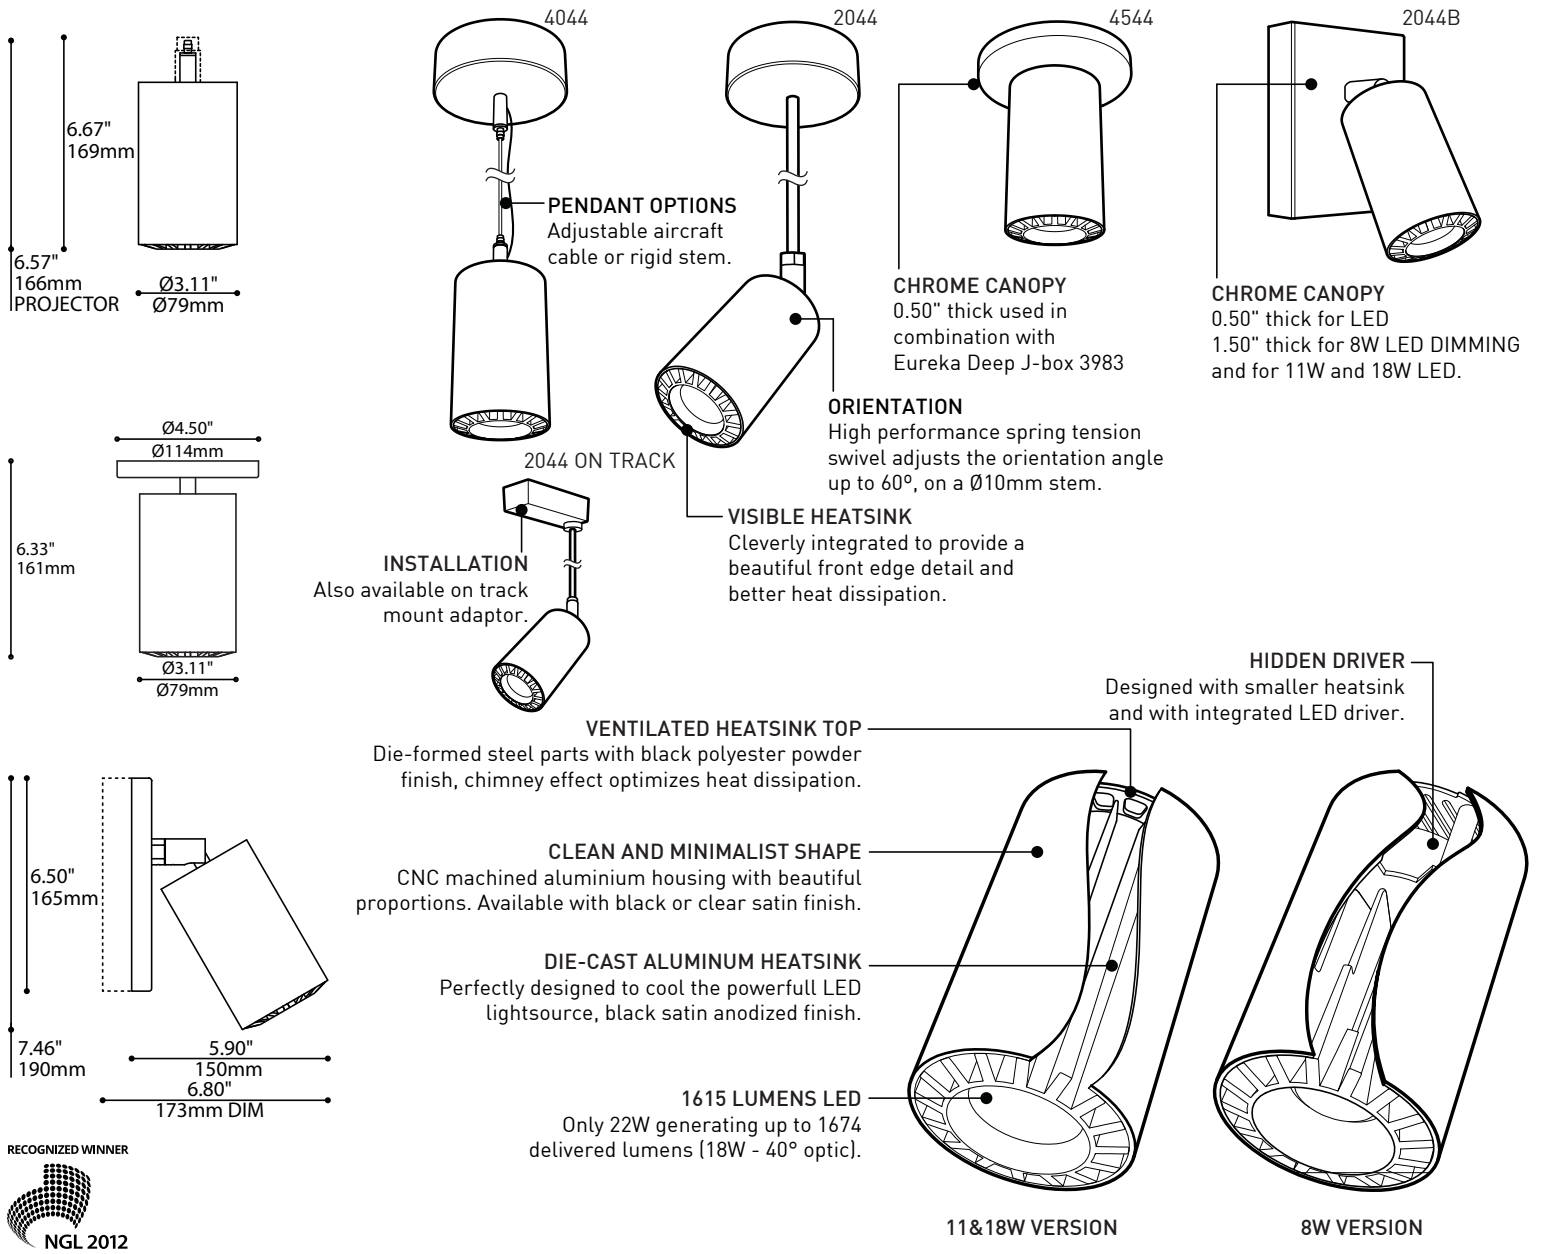

SPECIFICATIONS

	8W LED	11W LED	18W LED
LIGHT SOURCE	4 LED on MCPCB - System wattage 10W Total	1 x COB LED - System wattage 15W Total	1 x COB LED - System wattage 22W Total
DELIVERED LUMENS	964 lm	1438 lm [40° optic] or 1457 lm [20° optic]	1858 lm [40° optic] or 1882 lm [20° optic]
CRI	80 CRI (typical)		
CCT	3-step MacAdam Ellipse binning		
HOUSING	Machined aluminium tube		
HEATSINK	Black anodized aluminum		
LIGHT DISTRIBUTION	Directional (2044/2044B) or Direct (4044/4544)		
OPTICS	Total Internal Reflection (TIR) - 17° & 48°	TIR - 20° & 40°	TIR - 20° & 40°
VOLTAGE	120V or 277V	120V (DP) and 120-277V (DV)	120V (DP) and 120-277V (DV)
DRIVER	Constant Current 700mA, UL Recognized	Constant Current 350mA, UL Recognized	Constant Current 500mA, UL Recognized
DIMMING	Phase Dimming (DP) and 0-10V Dimming (DV)		
LM-79	On request	On request	On request
WARRANTY	5 years		

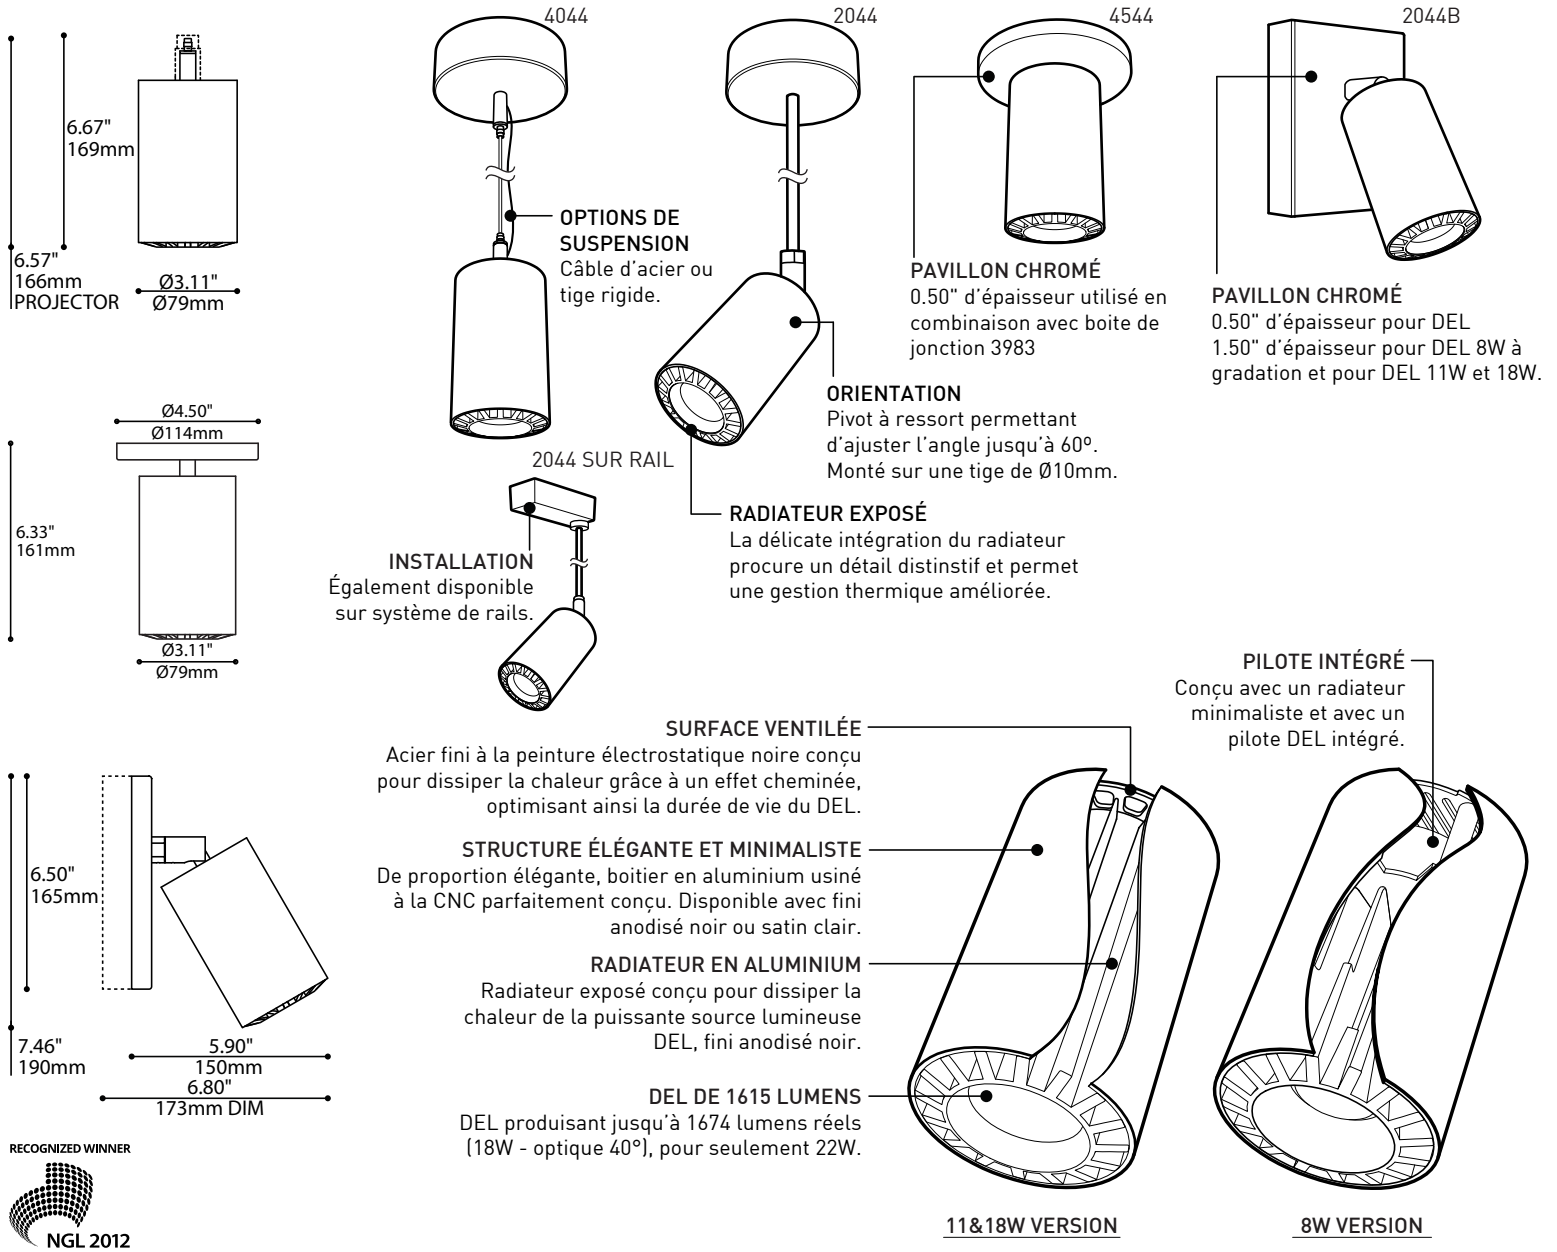

SPECIFICATIONS

SOURCE LUMINEUSE
LUMENS RÉELS

IRC

CCT

BOÎTIER

RADIATEUR

DISTRIBUTION LUMINEUSE

OPTIQUES

VOLTAGE

PILOTE

GRADATION

LM-79

GARANTIE

DEL 8W

4 LED sur MCPCB - Puissance totale de 10W
964lm

80 CRI (typique)

3-step MacAdam Ellipse binning

Tube d'aluminium usiné

Aluminium anodisé noir

Directionnel [2044/2044B] ou direct [4044/4544]

17° & 48° Reflection Totale Interne (TIR)

120V ou 277V

Courant Constant 700mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans

DEL 11W

1 DEL "COB" - Puissance totale de 15W
1438lm (optique 40°) ou 1457 lm (20°)

Faisceaux de 20° & 40° "TIR"

120V (DP) et 120-277V (DV)

Courant Constant 350mA, Reconnu UL

Sur demande

Sur demande

DEL 18W

1 DEL "COB" - Puissance totale 22W
1858 lm (optique 40°) ou 1882 lm (20°)

Faisceaux de 20° & 40° "TIR"

120V (DP) et 120-277V (DV)

Courant Constant 500mA, Reconnu UL

Sur demande

Sur demande