


SLIM SHADY 4411-GGC

PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS

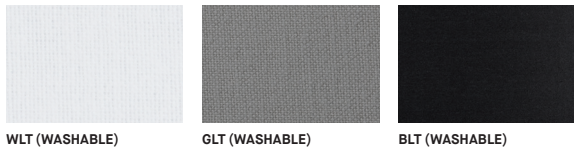

OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	TRACK 1 CIRCUIT	INC	LED
MOUNTING	2734B	2401E	2403G
CABLE	-	67.45"	67.95"
STEM	43.65"	43.30"	-

MOUNTING OPTIONS OPTIONS DE MONTAGE



TRACK	INC	LED
2734B 1.46" x 1.36" 37 x 35mm	2401E 04.50" x 1.00" Ø114 x 25mm	2403G 04.50" x 1.75" Ø114 x 44mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS


STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

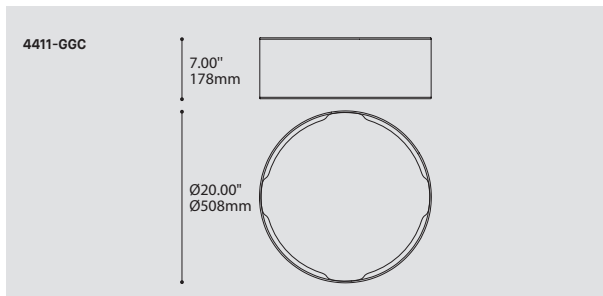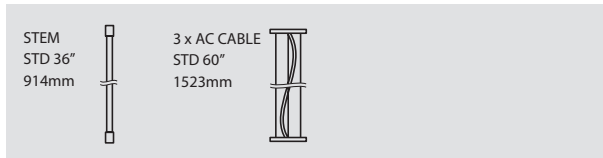

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4411-GGC SLIM SHADY	4411-GGC
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) 3XINC.40 40W X 3, INC, A19 / B10 / HAL T10, MEDIUM BASE (120V ONLY) LED.24* 24W, LED *NOT AVAILABLE WITH A TRACK ADAPTOR	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	FOR LED ONLY 30 3000K 35 3500K 40 4000K	
VOLTAGE VOLTAGE	120V 120 VOLT 277V* 277 VOLT	
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH LED ONLY DV 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY) LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.	
STEM OR CABLE TIGE OU CABLE	S10* 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE AC** AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE **NOT AVAILABLE WITH LED LIGHT SOURCE **NOT AVAILABLE WITH A TRACK ADAPTOR	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE	36 36" STEM (STD LENGTH) 60 60" AIRCRAFT CABLE (STD LENGTH) ** CUSTOM STEM LENGTH (PLEASE SPECIFY) ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND FOR INC : 1.00" CANOPY (2401E) FOR DIMMING LED: 1.75" CANOPY (2403G) TA1 TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT 120V ADAPTOR (2734B)	
MOUNTING OPTION OPTION DE MONTAGE	SCA* SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL^(A)	WH WHITE BLK BLACK ^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE*	CHR CHROME SC SATIN CHROME *NOT AVAILABLE WITH CABLE AND WHE CANOPY TOGETHER	
CANOPY FINISH FINI PAVILLON	WHE WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR	WLT WHITE - LINEN TRILAM BLT BLACK - LINEN TRILAM GLT GRAY - LINEN TRILAM	
ACRYLIC FINISH FINI ACRYLIQUE^(B)	WH WHITE BLK BLACK ^(B) IF LED LIGHT SOURCE IS SELECTED, ACRYLIC OFFERED IN WHITE ONLY.	

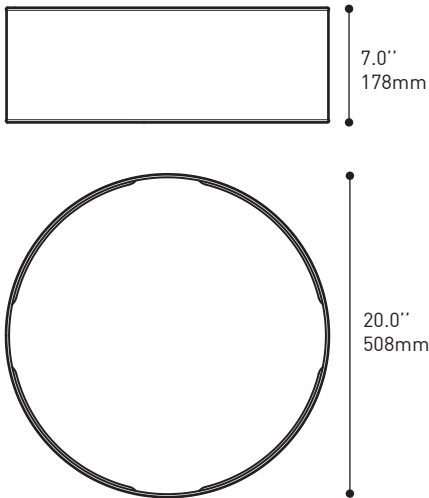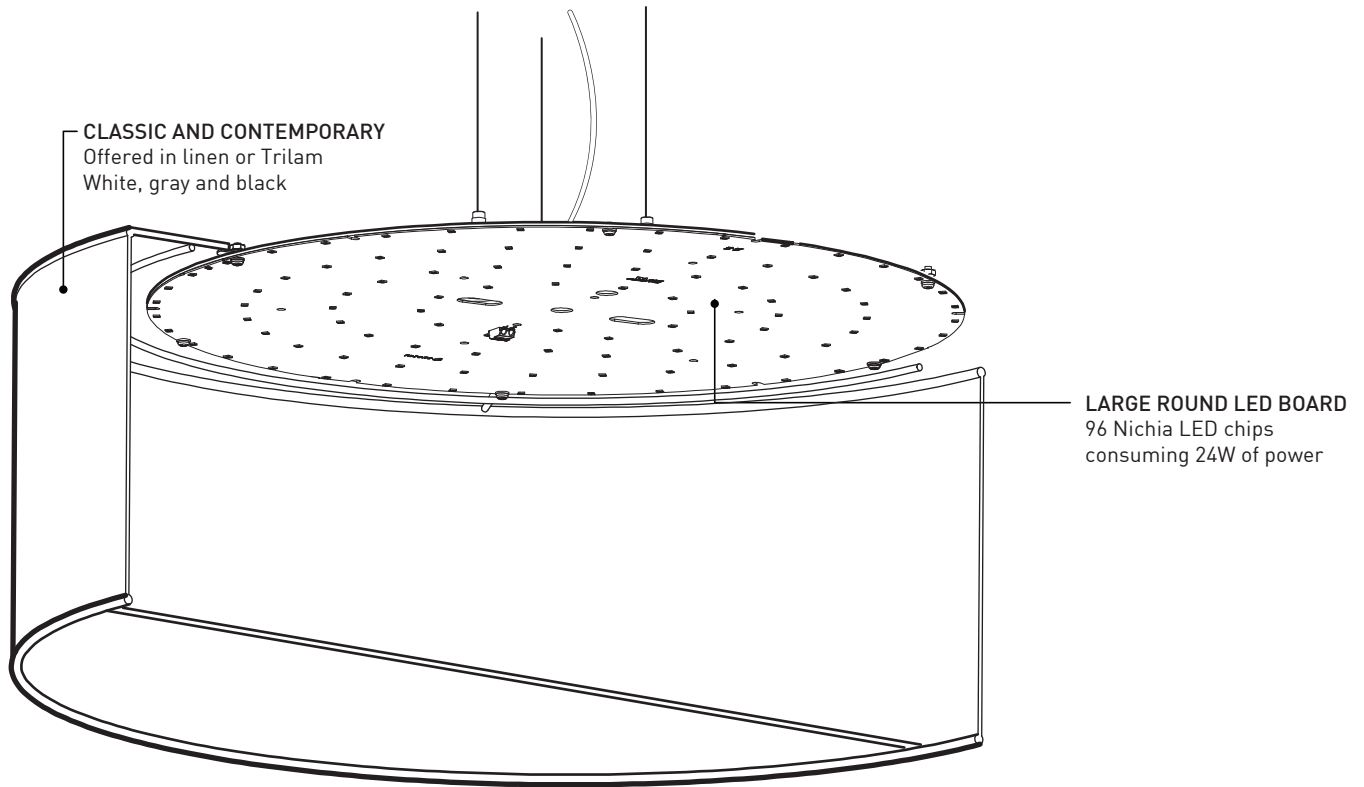

TRILAM: WASHABLE & STAIN RESISTANT, IDEAL FOR COMMERCIAL USE

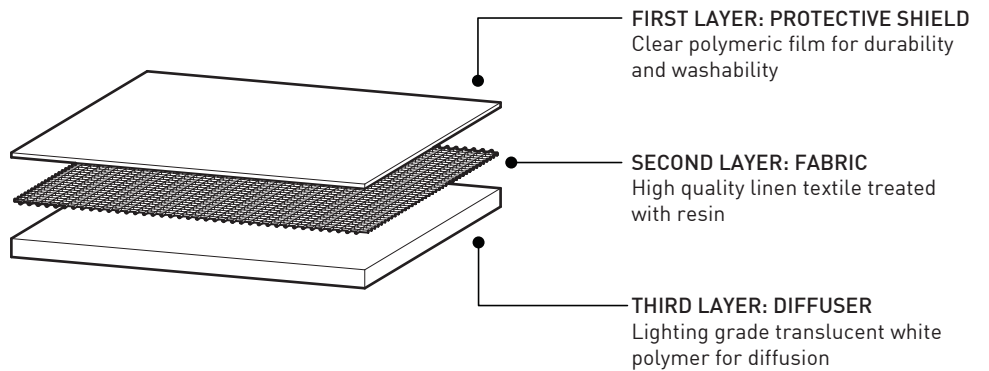

SPECIFICATIONS

4411-GGC

LIGHT SOURCE	LED.24.XX	3XINC.40
VOLTAGE		120V
DIMMING	DV 0-10V (120-277V) or DP PHASE DIMMING (120V)	
CERTIFICATION	c-CSA-us	
WARRANTY	5 year warranty on LED fixtures, 1 year warranty on fluorescent fixtures	




EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




4411-GGX


CLASSIQUE ET CONTEMPORAIN
Offert en lin ou Trilam
Blanc, gris et noir

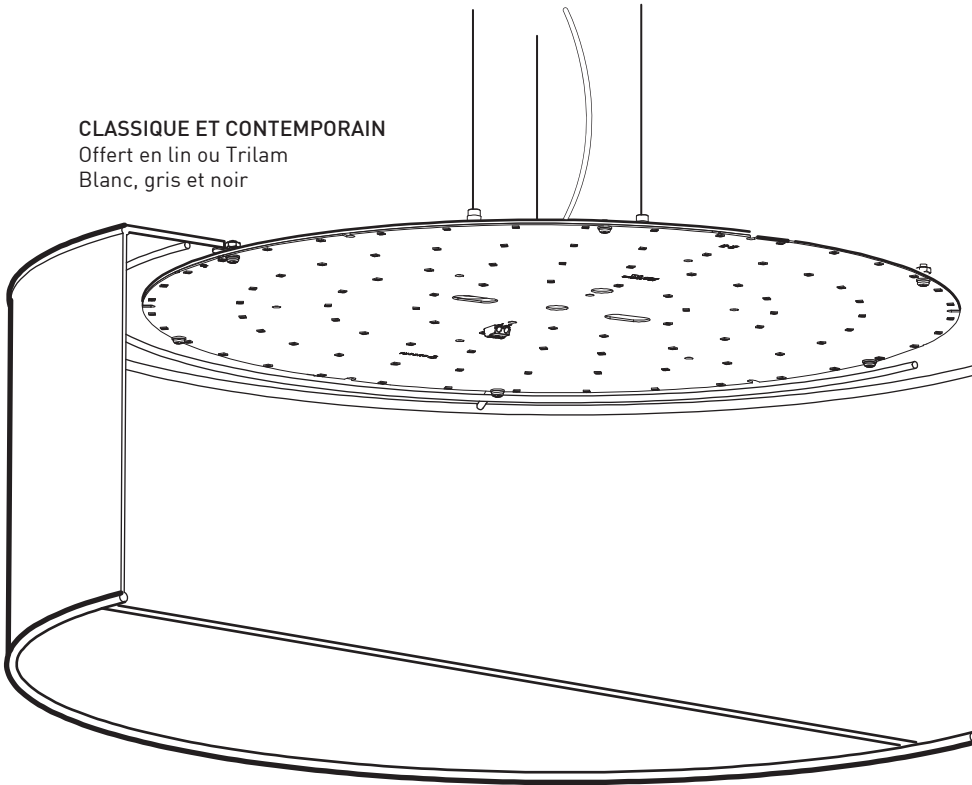

PANNEAU DEL ROND ET LARGE
96 diodes Nichia
consommant 24W

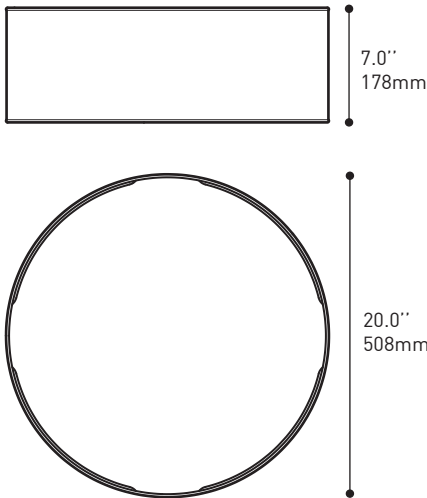

TRILAM: MATÉRIAU LAVABLE & RESISTANT AUX TACHES, IDEAL POUR LES APPLICATIONS COMMERCIALES

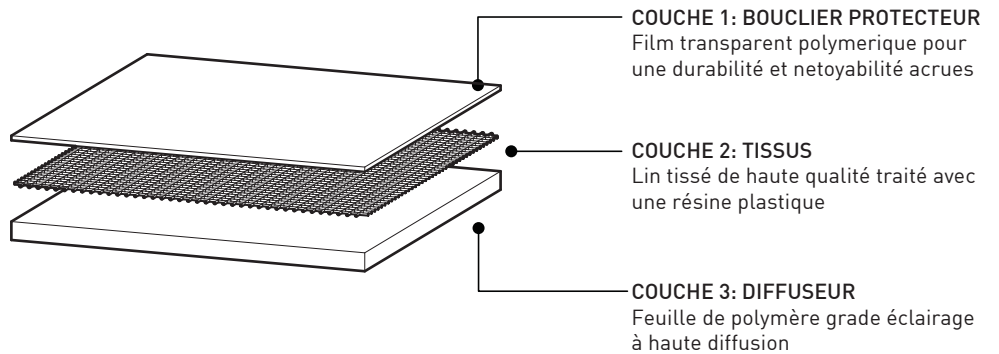

SPECIFICATIONS

4411-GGC

SOURCE LUMINEUSE

LED.24.XX

3XINC.40

VOLTAGE

120V

GRADATION

DV 0-10V (120-277V) ou
DP PHASE DIMMING (120V)

CERTIFICATION

c-CSA-us

GARANTIE

Garantie de 5 ans sur le luminaire en DEL, Garantie de 1 an sur les luminaires en fluorescent



EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4411-GGC