

ARRAY CELESTE 4425-CEL

PROJECT PROJÉT
SPEC TYPE
NOTES

CANOPY FINISH FINI PAVILLON



BLKE

WHE

CHR

GLASS FINISH FINI VERRE



CLR

FRO

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE		4425-CEL		CODE
4425-CEL	ARRAY CELESTE			4425-CEL
CONFIGURATION CONFIGURATION				
303L	LEVELED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 16"	
303V	V-SHAPED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 22"	
303I	INCLINED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 28"	
304D	DIAMOND CLUSTER	3 CABLES, 4 HEADS	MIN. HEIGHT 40"	
505V	V-SHAPED CLUSTER	5 CABLES, 5 HEADS	MIN. HEIGHT 28"	
505T	TRAPEZE CLUSTER	5 CABLES, 5 HEADS	MIN. HEIGHT 28"	
510D	DIAMOND CLUSTER	5 CABLES, 10 HEADS	MIN. HEIGHT 52"	
510M	MIXED CLUSTER	5 CABLES, 10 HEADS	MIN. HEIGHT 70"	
LIGHT SOURCE SOURCE LUMINEUSE				LED
LED	REGULAR OUTPUT			
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR				
27	2700K			
30	3000K			
35	3500K			
40	4000K			
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)				90
90	90+ CRI			
VOLTAGE VOLTAGE				
120V	120 VOLT			
277V	277 VOLT			
CONTROL OPTION OPTION DE CONTRÔLE				DV
DV	0-10V DIMMING (120V-277V)			
NLTAIR2*	NLIGHT AIR CONTROL GEN 2			
NLIGHT*	NLIGHT WIRED CONTROL			
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
CABLE CÂBLE				C
C	BLACK CABLE, CONNECTOR MOUNTED, NOT FIELD ADJUSTABLE			
OVERALL HEIGHT HAUTEUR HORS TOUT				
**	CUSTOM OVERALL HEIGHT (PLEASE SPECIFY)			
OVERALL HEIGHT MEASURED FROM CEILING TO BOTTOM OF FIXTURE CONFIGURATION PATTERN IS SET, ONLY UPPER CABLES ARE INFLUENCED BY OVERALL HEIGHT PLEASE REFER TO CONFIGURATION'S MINIMUM HEIGHT FOR SPECIFICATION				

CANOPY FINISH FINI PAVILLON

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
CHR	CHROME

HEAD FINISH FINI TÊTE

BLKE	BLACK FINE TEXTURE	BLKE
------	--------------------	------


GLASS FINISH FINI VERRE

CLR	CLEAR GLASS
FRO	FROSTED GLASS

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING	
39NLAB*	NLIGHT AIR GEN 2 REMOTE CONTROL BOX
39NLWB*	NLIGHT WIRED REMOTE CONTROL BOX
*FOR CHICAGO PLENUM INSTALLATION. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	

CONFIGURATION CONFIGURATION

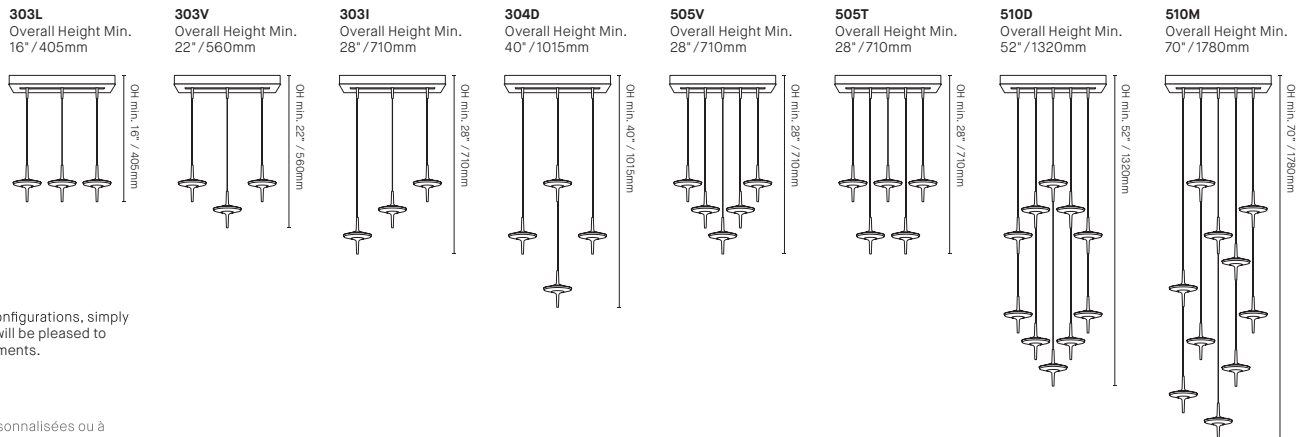

CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.


CONFIGURATION PERSONNALISÉE

Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.



SPECIFICATION

CELESTE

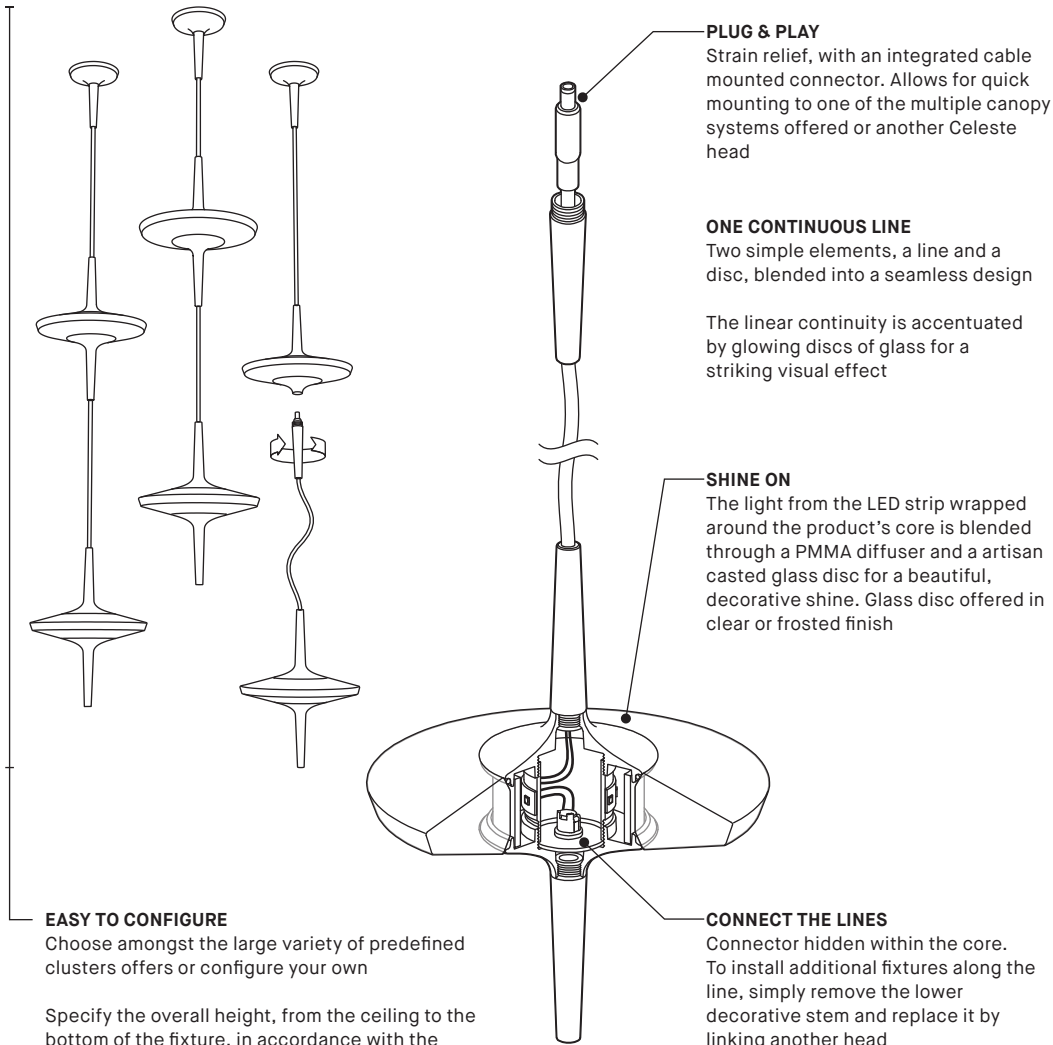

EASY TO CONFIGURE

Choose amongst the large variety of predefined clusters offers or configure your own

Specify the overall height, from the ceiling to the bottom of the fixture, in accordance with the configuration's minimum height and we'll take care of the rest

CELESTE SYSTEMS

DROPLET CELESTE 2447-CEL
Remote junction box option
Offered with 1, 3, 5, or 6 connector mounted mini canopies

DROPLET CELESTE 2448-CEL
Octagonal junction box mounting
Offered with 1 connector mounted mini canopy and decorative plate covering the junction box

ARRAY CELESTE 4425-CEL
Offered with 3 or 5 connectors

DROP CELESTE 4427-CEL
Offered with 3 or 6 connectors

CELESTE 4010-CEL
Extra head accessory light source
Requires a Celeste system (sold separately)


PRODUCT SPECIFICATION **XXX-CEL-CLR** **XXX-CEL-FRO**


PERFORMANCE		
WATTAGE PER HEAD	3.8W	3.8W
DELIVERED LUMENS PER HEAD (4000K)	200 LM	235LM
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM HEADS PER CABLE	6 HEADS	6 HEADS
MAXIMUM HEADS ON SYSTEM	20 HEADS	20 HEADS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION

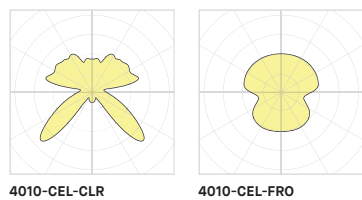

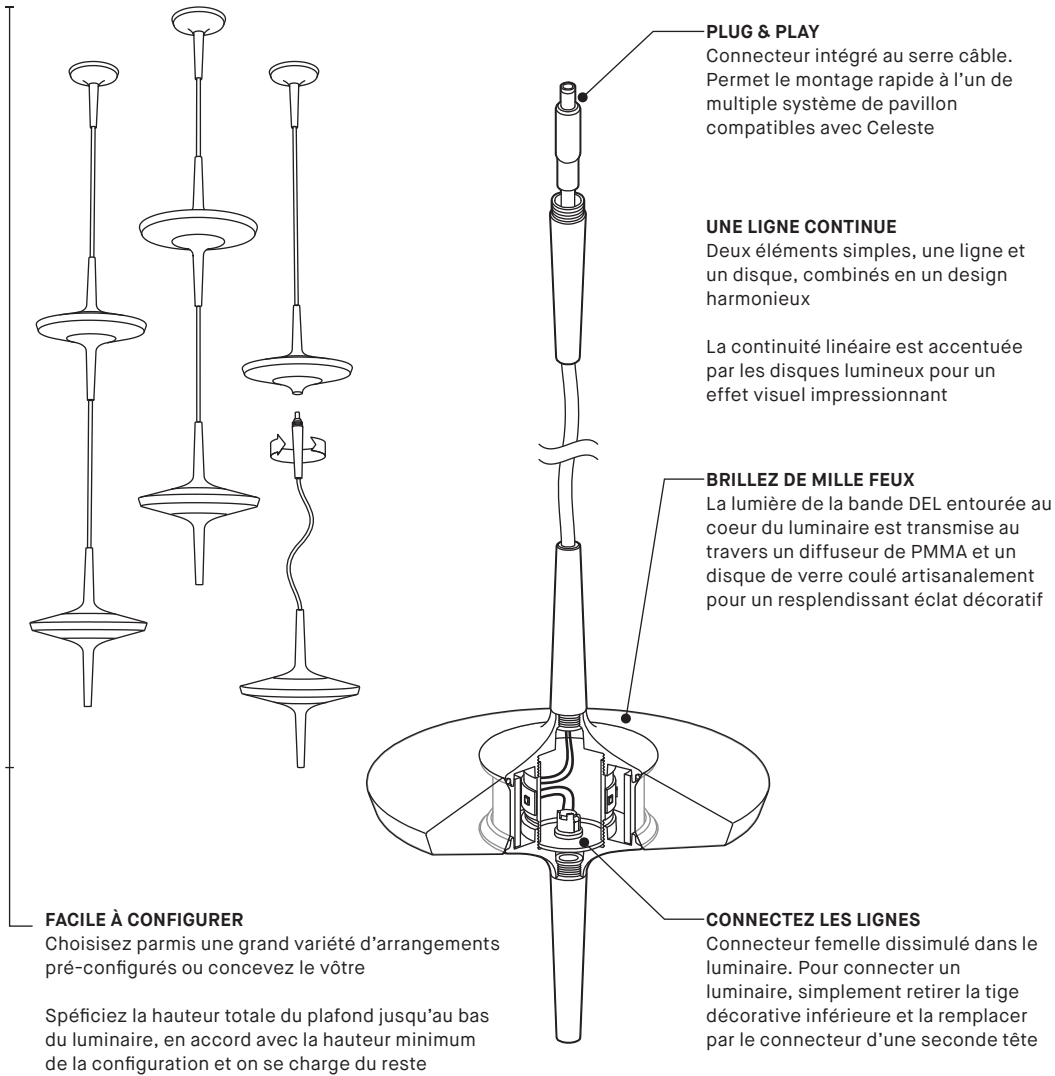

SYSTÈMES CELESTE

DROPLET CELESTE 2447-CEL
Option avec boîtes de jonction éloignée
Offert avec 1, 3, 5, ou 6 mini pavillons munis de connecteurs

DROPLET CELESTE 2448-CEL
Montage sur boîte de jonction octogonale
Offert avec 1 mini pavillon muni d'un connecteur et une plaque décorative couvrant la boîte de jonction

ARRAY CELESTE 4425-CEL
Offert avec 3 ou 5 connecteurs

DROP CELESTE 4427-CEL
Offert avec 3 ou 6 connecteurs

CELESTE 4010-CEL
Accessoire tête lumineuse supplémentaire
Requiert un système Celeste (vendu séparément)


SPÉCIFICATION PRODUIT

	XXX-CEL-CLR	XXX-CEL-FRO
PERFORMANCE		
PUISSANCE PAR TÊTE	3.8W	3.8W
LUMENS RÉELS PAR TÊTE (4000K)	200 LM	235LM
AUTRES INFORMATION		
POIDS PAR TÊTE	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM DE TÊTES PAR CÂBLE	6 TÊTES	6 TÊTES
MAXIMUM DE TÊTES SUR LE SYSTÈME	20 TÊTES	20 TÊTES

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION

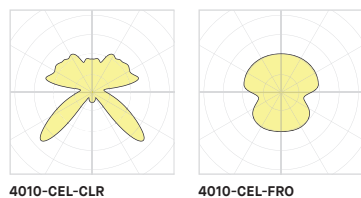

Visitez notre site Web pour les termes et conditions.