

# OLLO 4654B

PROJECT PROJET
SPEC TYPE
NOTES



## FINISH FINI



BLK


WH

## FAMILY FAMILLE



4454B

4654B (WALL SURFACE)

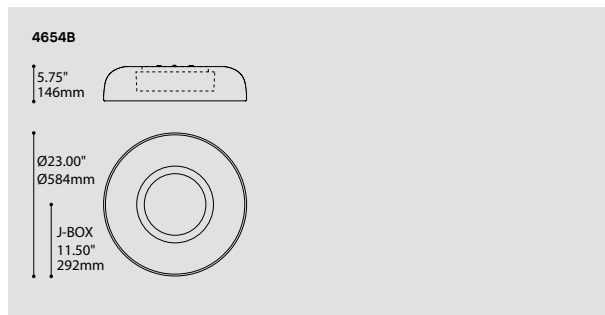


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE	4654B OLLO	4654B
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE	LED.10	LED.10
<b>LED.10</b>	10W, LED	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR <sup>(A)</sup>		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX (CRI)</b> INDICE DE RENDU DE COULEUR (IRC) <sup>(B)</sup>		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>VOLTAGE</b> VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
<b>SHADE FINISH</b> FINI ABAT-JOUR		
BLK	BLACK	
WH	WHITE	
<b>DIFFUSER FINISH</b> FINI DIFFUSEUR		WH
WH	WHITE	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




<b>DESIGN:</b>	Fully enclosed direct illumination wall mounted fixture with retro-modern styling.
<b>LIGHT SOURCE:</b>	Dimming LED light sources available.
<b>SHADE:</b>	Die-spun aluminium shade with a black or white powder coat finish.
<b>DIFFUSER:</b>	Hand blown translucent white triplex glass.
<b>CERTIFIED:</b>	c-CSA-us, c-UL-us
<b>CONCEPTION:</b>	Applique rétro-contemporaine complètement fermée avec un éclairage direct.
<b>SOURCE LUMINEUSE:</b>	Sources lumineuses offerres: DEL à intensité variable.
<b>ABAT-JOUR:</b>	Aluminium repoussé avec peinture électrostatique blanche ou noire.
<b>DIFFUSEUR:</b>	Verre triplex blanc translucide soufflé à la main.
<b>CERTIFIÉ:</b>	c-CSA-us, c-UL-us

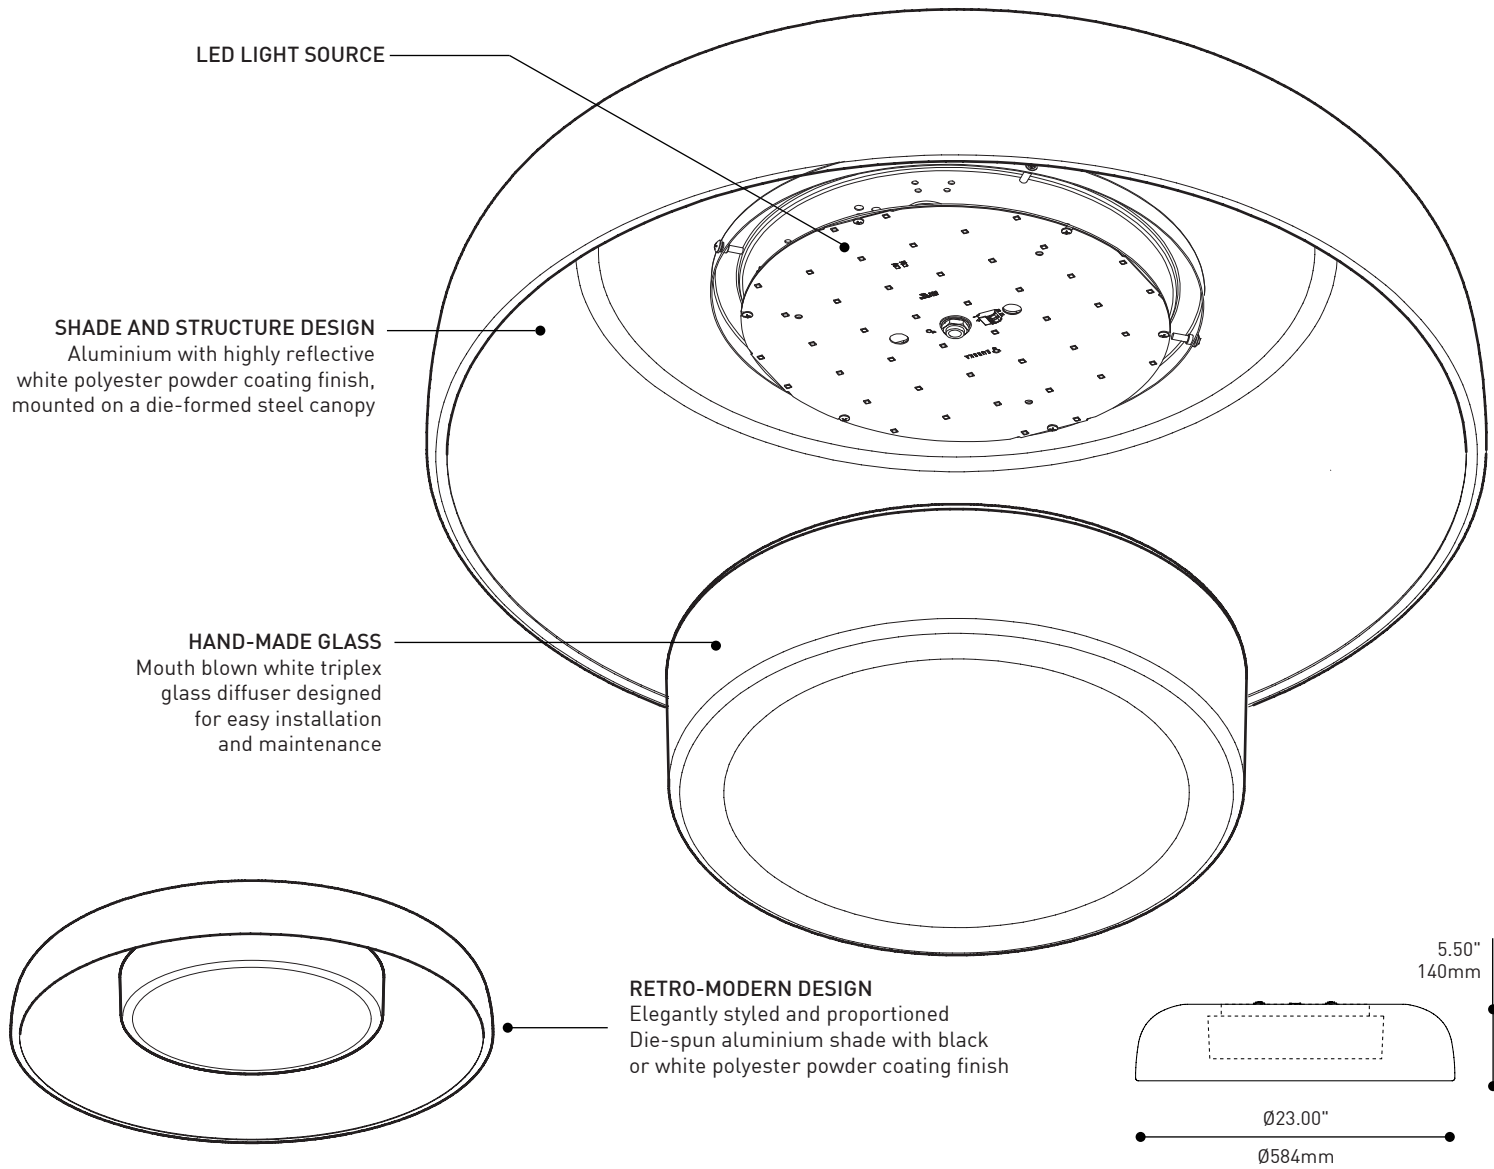

### SPECIFICATIONS

4654B-WH | 4654B-BLK

LIGHT SOURCE	44 x Mid power LED on MCPCB
DELIVERED LUMENS	1268 lm   971 lm
SYSTEM WATTAGE	13.3W
CRI	80+ CRI or 90+ CRI
CCT	2700K, 3000K, 3500K or 4000K 3-step MacAdam ellipse binning
DRIVER / BALLAST	Hatch 16W CC 0-10V
DIMMING	DV 0-10V (120-277V) or DP PHASE DIMMING (120V)
VOLTAGE	120V or 277V
SHADE	Die-Formed Spun 14 gauge aluminum with black or white polyester powder-coated finish
STRUCTURE	18 Gauge die-formed steel with highly reflective white polyester powder-coated finish
DIFFUSER	Mouth blown white triplex glass
SUSPENSION	3 x stainless steel aircraft cable suspension with an easy-adjust / level grippers system and clear power cable
CERTIFICATION	c-CSA-us
WARRANTY	5 year warranty on LED fixtures

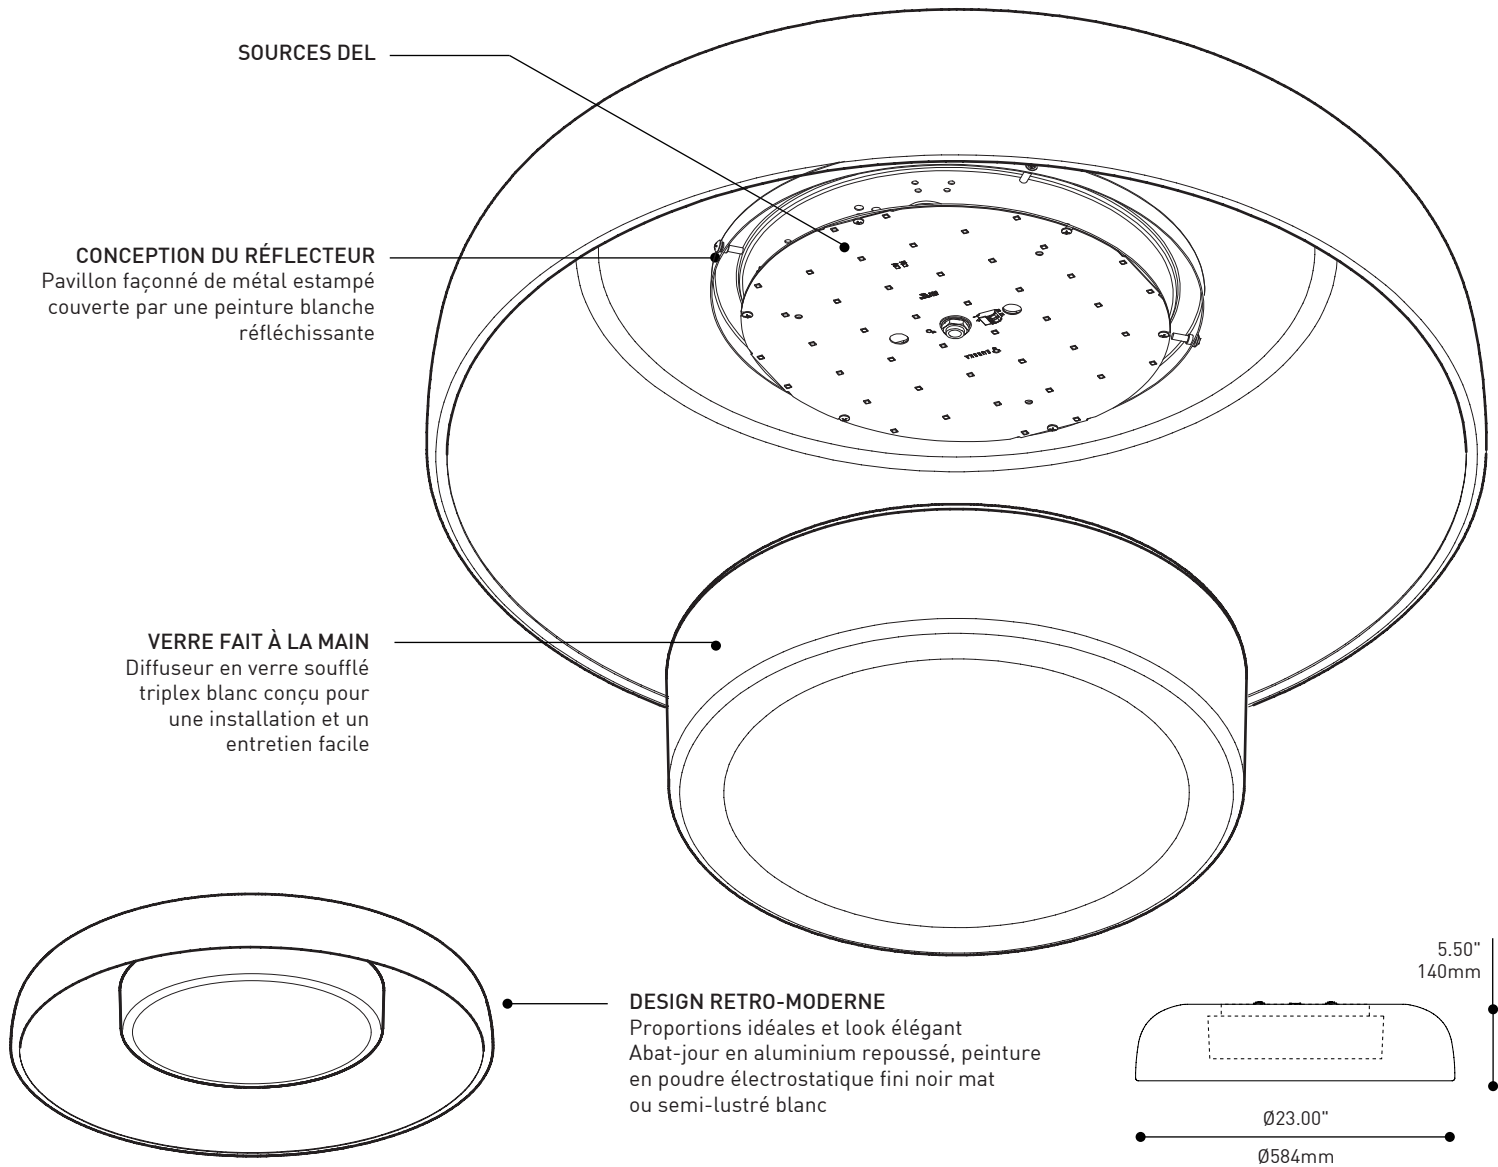

### SPECIFICATIONS

4654B-WH | 4654B-BLK

SOURCE LUMINEUSE	44 x LED de 0.25W puissance moyenne sur MCPCB
LUMENS RÉELS	1268 lm   971 lm
PUISSANCE SYSTÈME	13.3W
IRC	80+ IRC ou 90+ IRC
CCT	2700K, 3000K, 3500K ou 4000K 3 ellipses MacAdam
LUMENS LIVRÉ	~1126lm (WH-4000K) / ~862lm (BLK-4000K)
PILOTE / BALLAST	Hatch 16W CC 0-10V
GRADATION	DV 0-10V (120-277V) ou GRADATION DP PHASE (120V)
VOLTAGE	120V ou 277V
ABAT-JOUR	Aluminium repoussé de calibre 14, fini à la peinture électrostatique noir ou blanc
STRUCTURE	Acier de calibre 18 formé, fini à la peinture électrostatique blanc hautement réfléchissant
DIFFUSEUR	Diffuseur en verre opale soufflée par bouche
SUSPENSION	3 x câbles de suspension en acier inoxydable "Aircraft" / Système d'ajustement facile / Câble électrique clair
CERTIFICATION	c-CSA-us
GARANTIE	Garantie de 5 ans sur le luminaire en DEL